

IN100

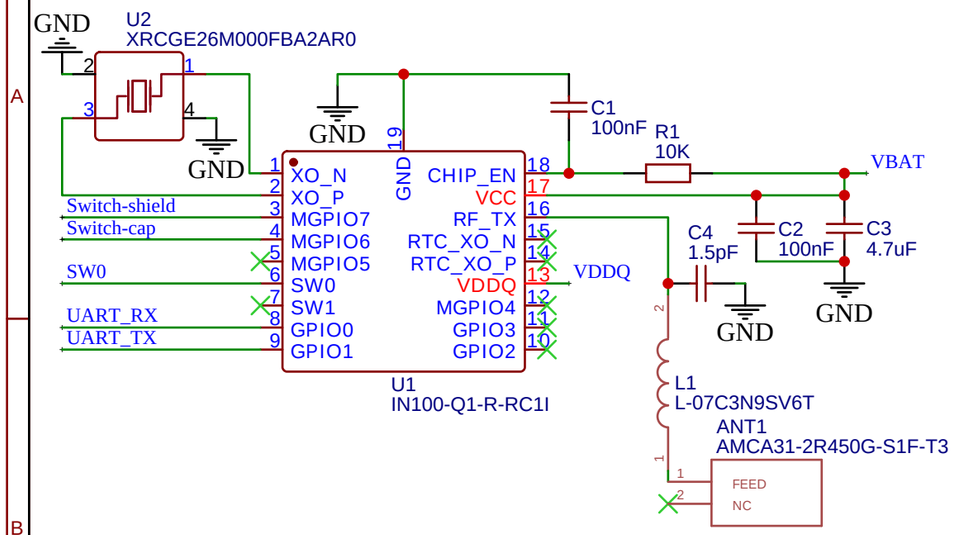


C3-10uF Reference

*PCB 1oz. 1.6mm FR-4
*1.5V power it's ok

BAT_HOLDER

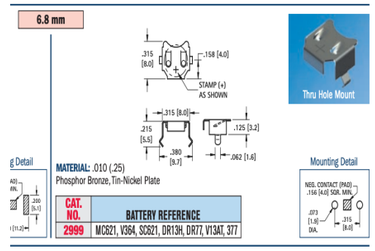


*design battery holder




BUTTON_#1

-Posted

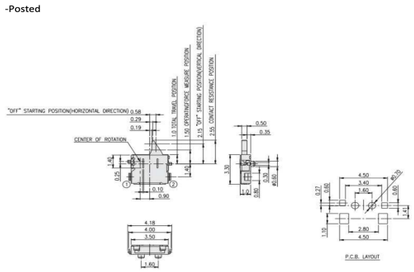


*design JJCHLUJ100NCNMRTR
*normal closed

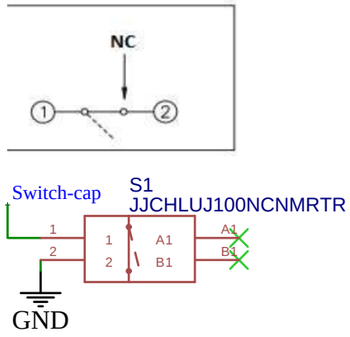


BUTTON_#2


-Posted

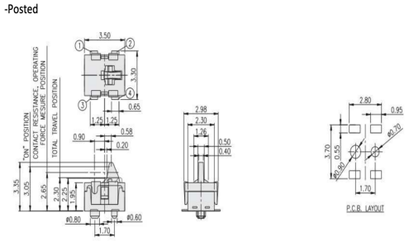

*design JJBV0UG335NONPRTR
*normal open

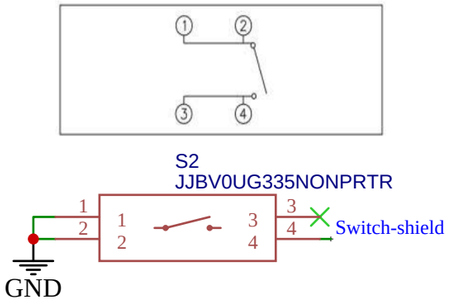


UART



3.0 Schematic Requirements

3.1 Update reference schematic with antenna designed for a 50Ω impedance system (preferably PCB trace design).
3.2 Update reference schematic to incorporate the two switches on NanoBeacon GPIOs.
3.3 Incorporate test pads into the reference design for on-circuit programing.
3.4 32.768 kHz RTC crystal in reference design is not needed.


4.0 Reference Design

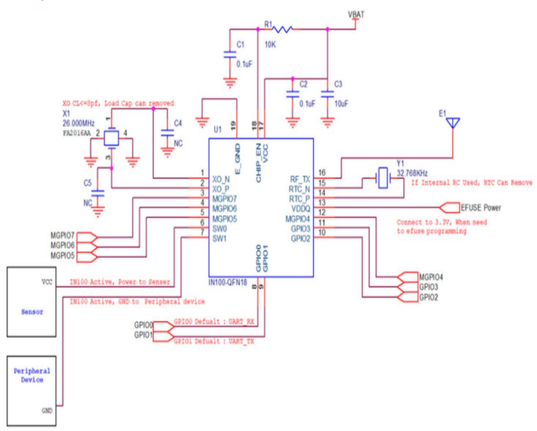



6.0 Initial BOM

6.1 Selected components should be available through US distributers (Digi Key, Mouser, etc.)

Description	Part Number	Manufacturer	Quantity	Designator
SoC	IN100-Q1-R-RC1I	InPlay	1	
Battery	2984-377-ND	Renata	1	
Holder	36-2999-ND	Keystone Electronics	1	
Switch-cap	JJCHLUJ100NCNMRTR	TE Connectivity	1	
Switch-shield	JJBV0UG335NONPRTR	TE Connectivity	1	
10k			1	R1
0.1uF			2	C1, C4
26MHz Crystal			1	Y2
10uF			1	C5

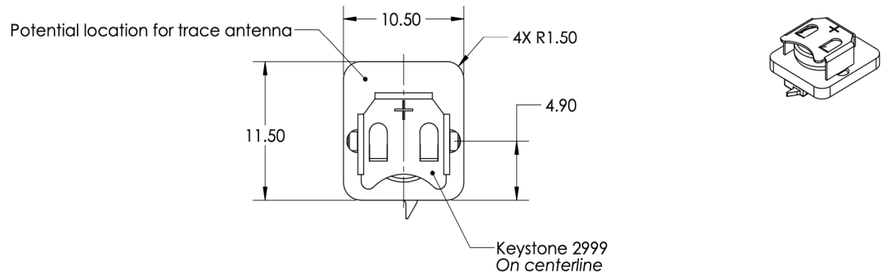



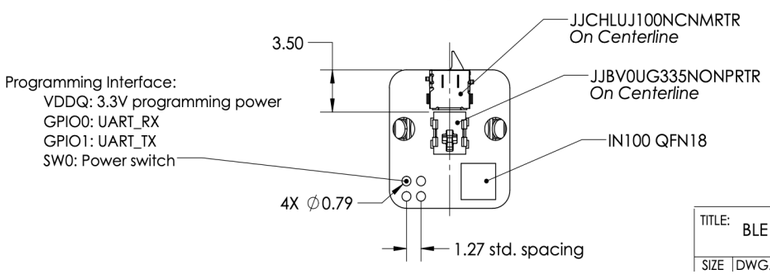

TITLE: BLE Beacon
SIZE | DWG. NO. | REV

TITLE: Beacon_IN100_schematic		REV: 1.0
	Company: PoClab	Sheet: 1/1
	Date: 2022-09-05 Drawn By: yankobogdan	