


BOOST CONVERTER

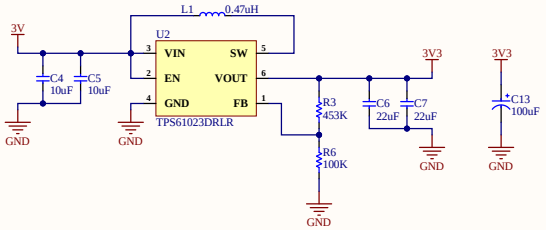


ESP32 MCU

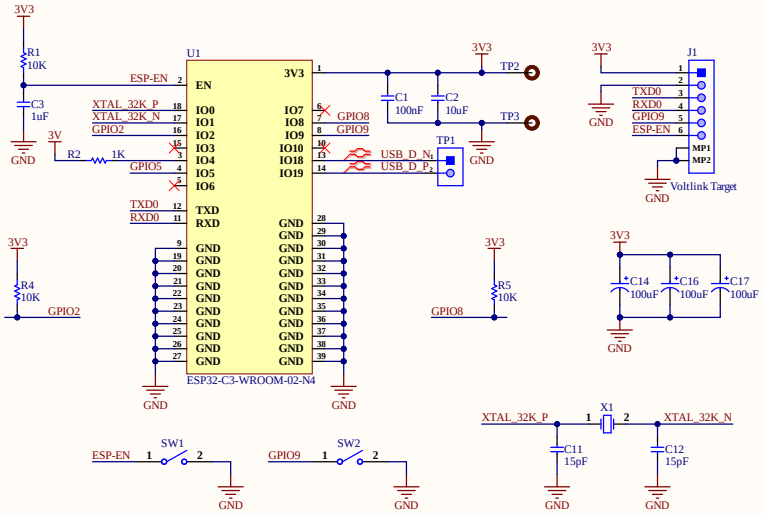


COIN CELL






AC DETECTION

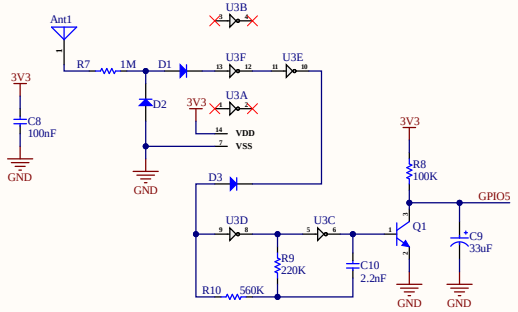

eSpark Consulting Group

Title: Monitor-v1.0.SchDoc	
File: PowerCutMonitor-v1.0.PrjPcb	
Date: 5/7/2025	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 1

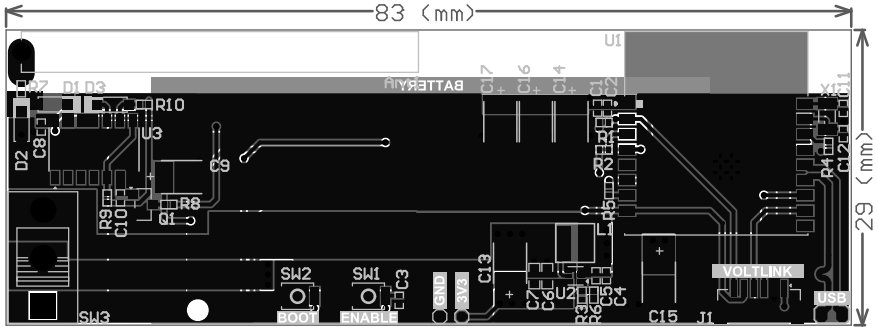

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.39mil	3.5	
1	Top Layer		1.38mil		
	Dielectric 1	FR-4	59.06mil	4.8	
2	Bottom Layer		1.38mil		
	Bottom Solder	Solder Resist	0.39mil	3.5	
	Bottom Overlay				

Total board thickness: 62.60mil