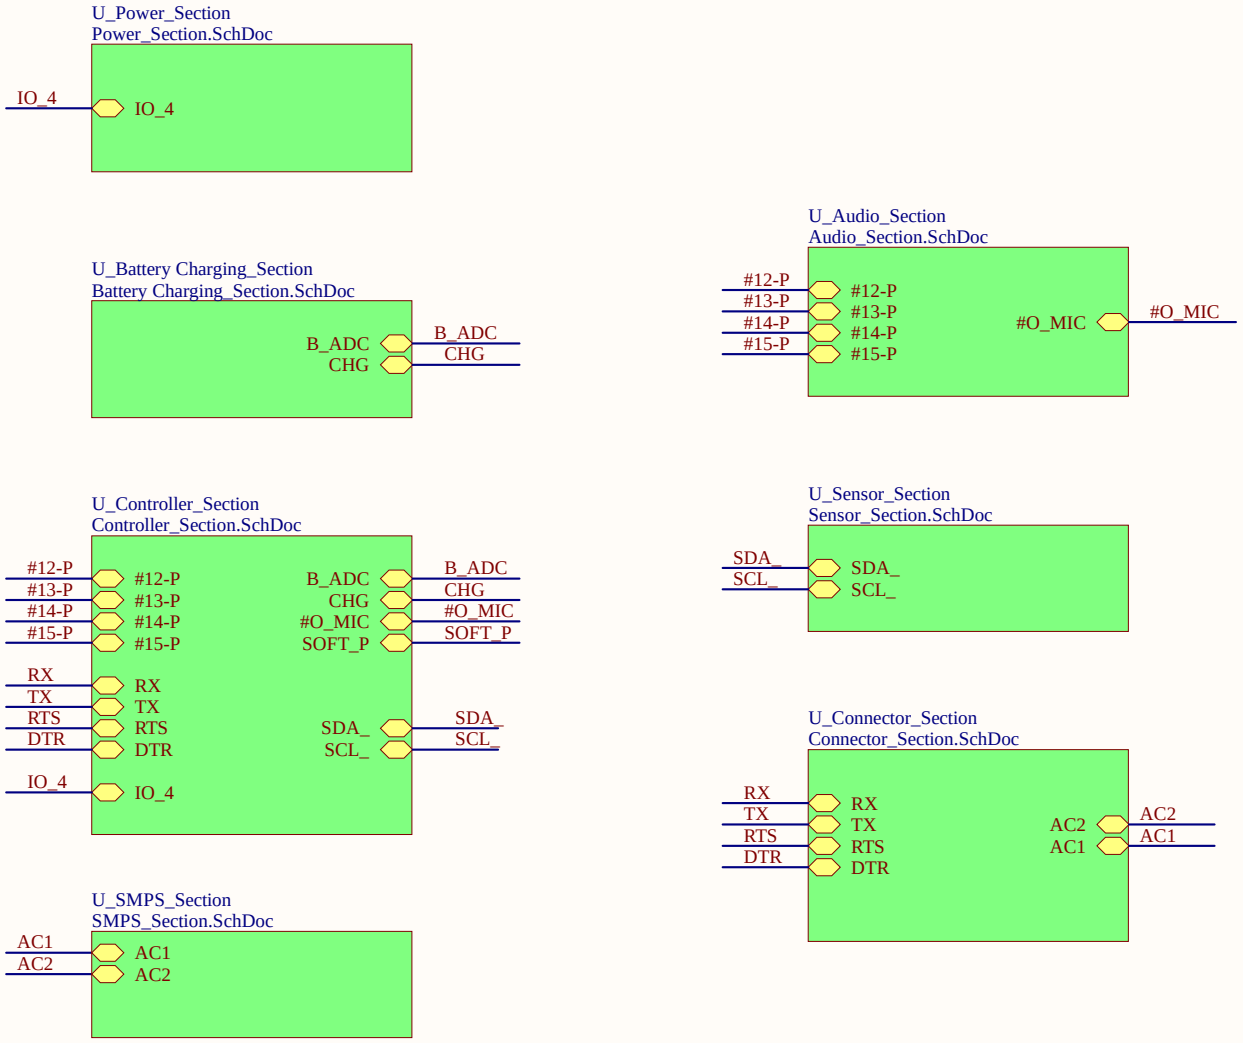

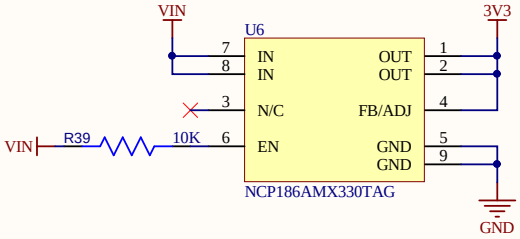
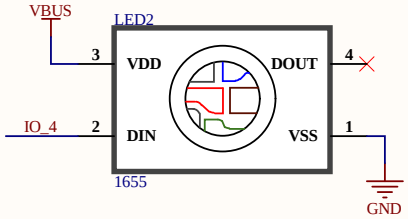
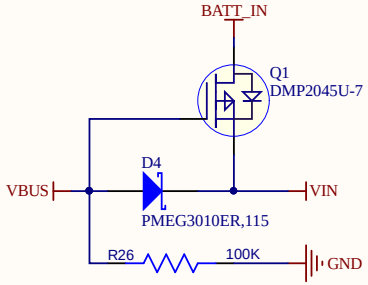

U_Power_Section
Power_Section.SchDoc
IO_4
IO_4
U_Battery Charging_Section
Battery Charging_Section.SchDoc
B_ADC
CHG
B_ADC
CHG
U_Audio_Section
Audio_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
#12-P
#13-P
#14-P
#15-P
#O_MIC
#O_MIC
U_Controller_Section
Controller_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
RX
TX
RTS
DTR
IO_4
#12-P
#13-P
#14-P
#15-P
RX
TX
RTS
DTR
IO_4
B_ADC
CHG
#O_MIC
SOFT_P
SDA_
SCL_
B_ADC
CHG
#O_MIC
SOFT_P
SDA_
SCL_
U_Sensor_Section
Sensor_Section.SchDoc
SDA_
SCL_
SDA_
SCL_
U_Connector_Section
Connector_Section.SchDoc
RX
TX
RTS
DTR
RX
TX
RTS
DTR
AC2
AC1
AC2
AC1
U_SMPS_Section
SMPS_Section.SchDoc
AC1
AC2
AC1
AC2



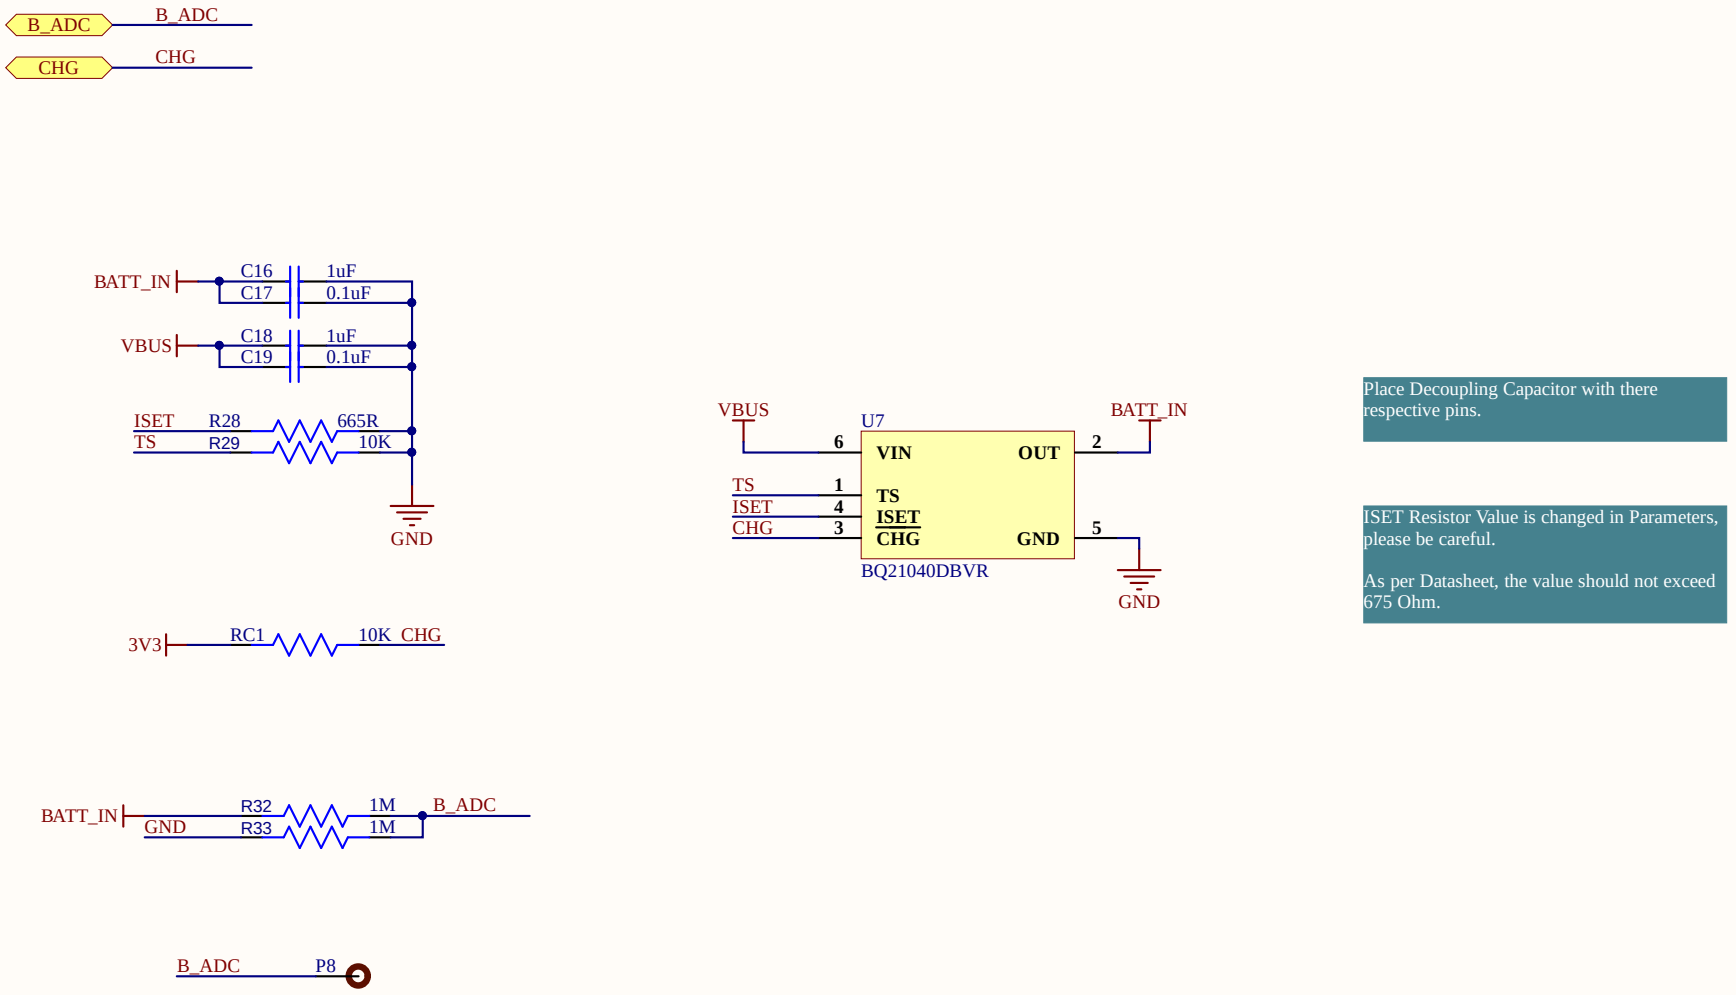



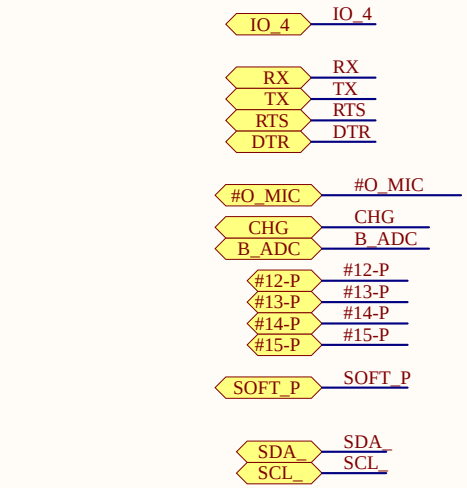




# Power Section

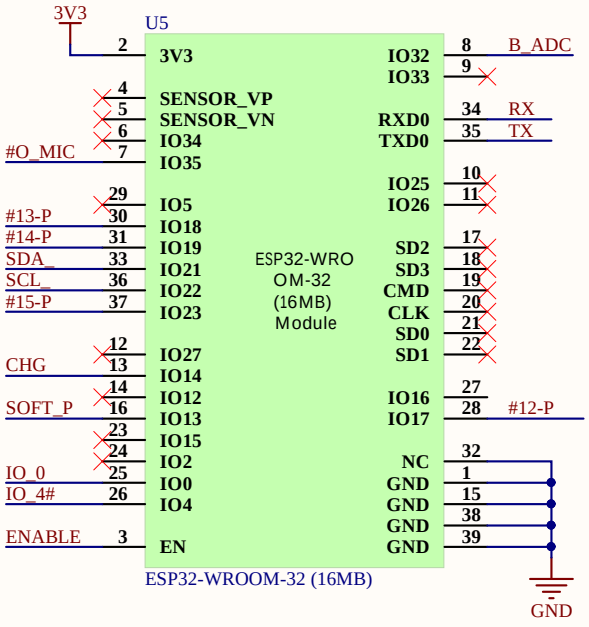


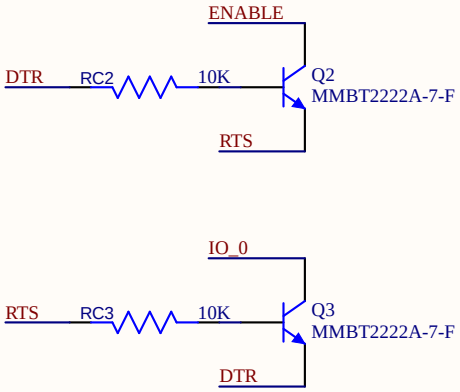

# Battery Charging Section




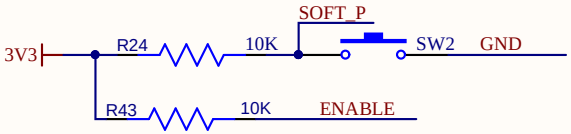

External Enable wouldn't be used as Development board already had circuit.

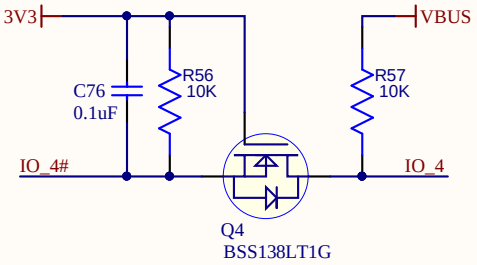
SW2 is being used for Software Reset.



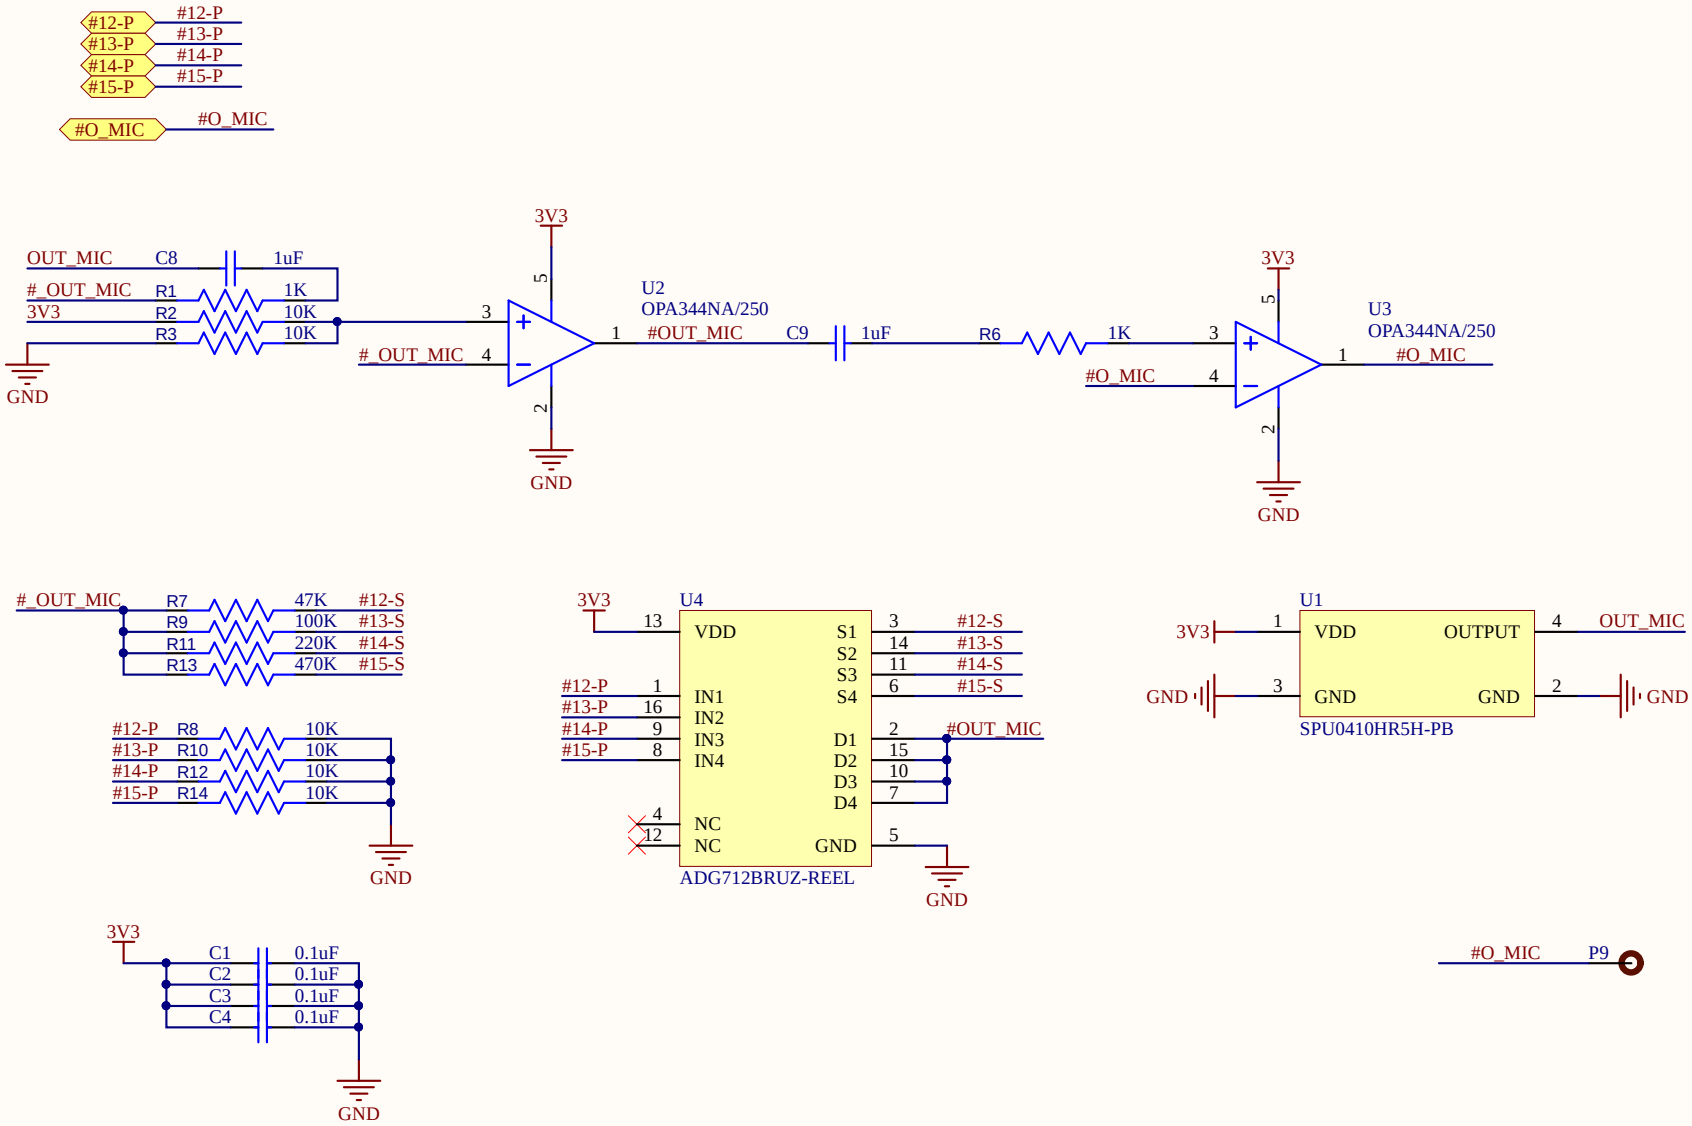







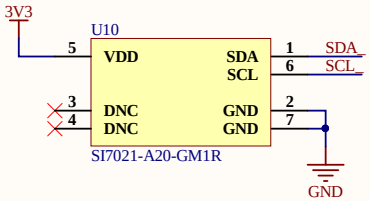

# Controller Section





# Audio Section







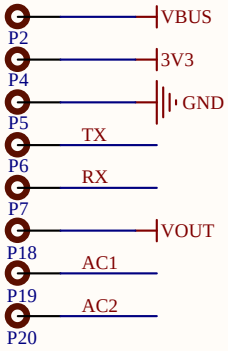

# Sensor Section




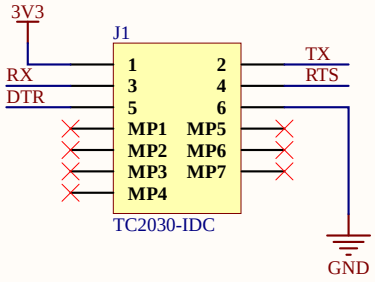

Mentioned Capacitors will be placed with Battery Connector and with USB Main Connector.


No Need to place Decoupling Capacitors with Switch as this is just path.

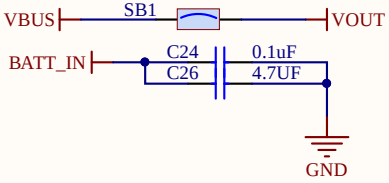


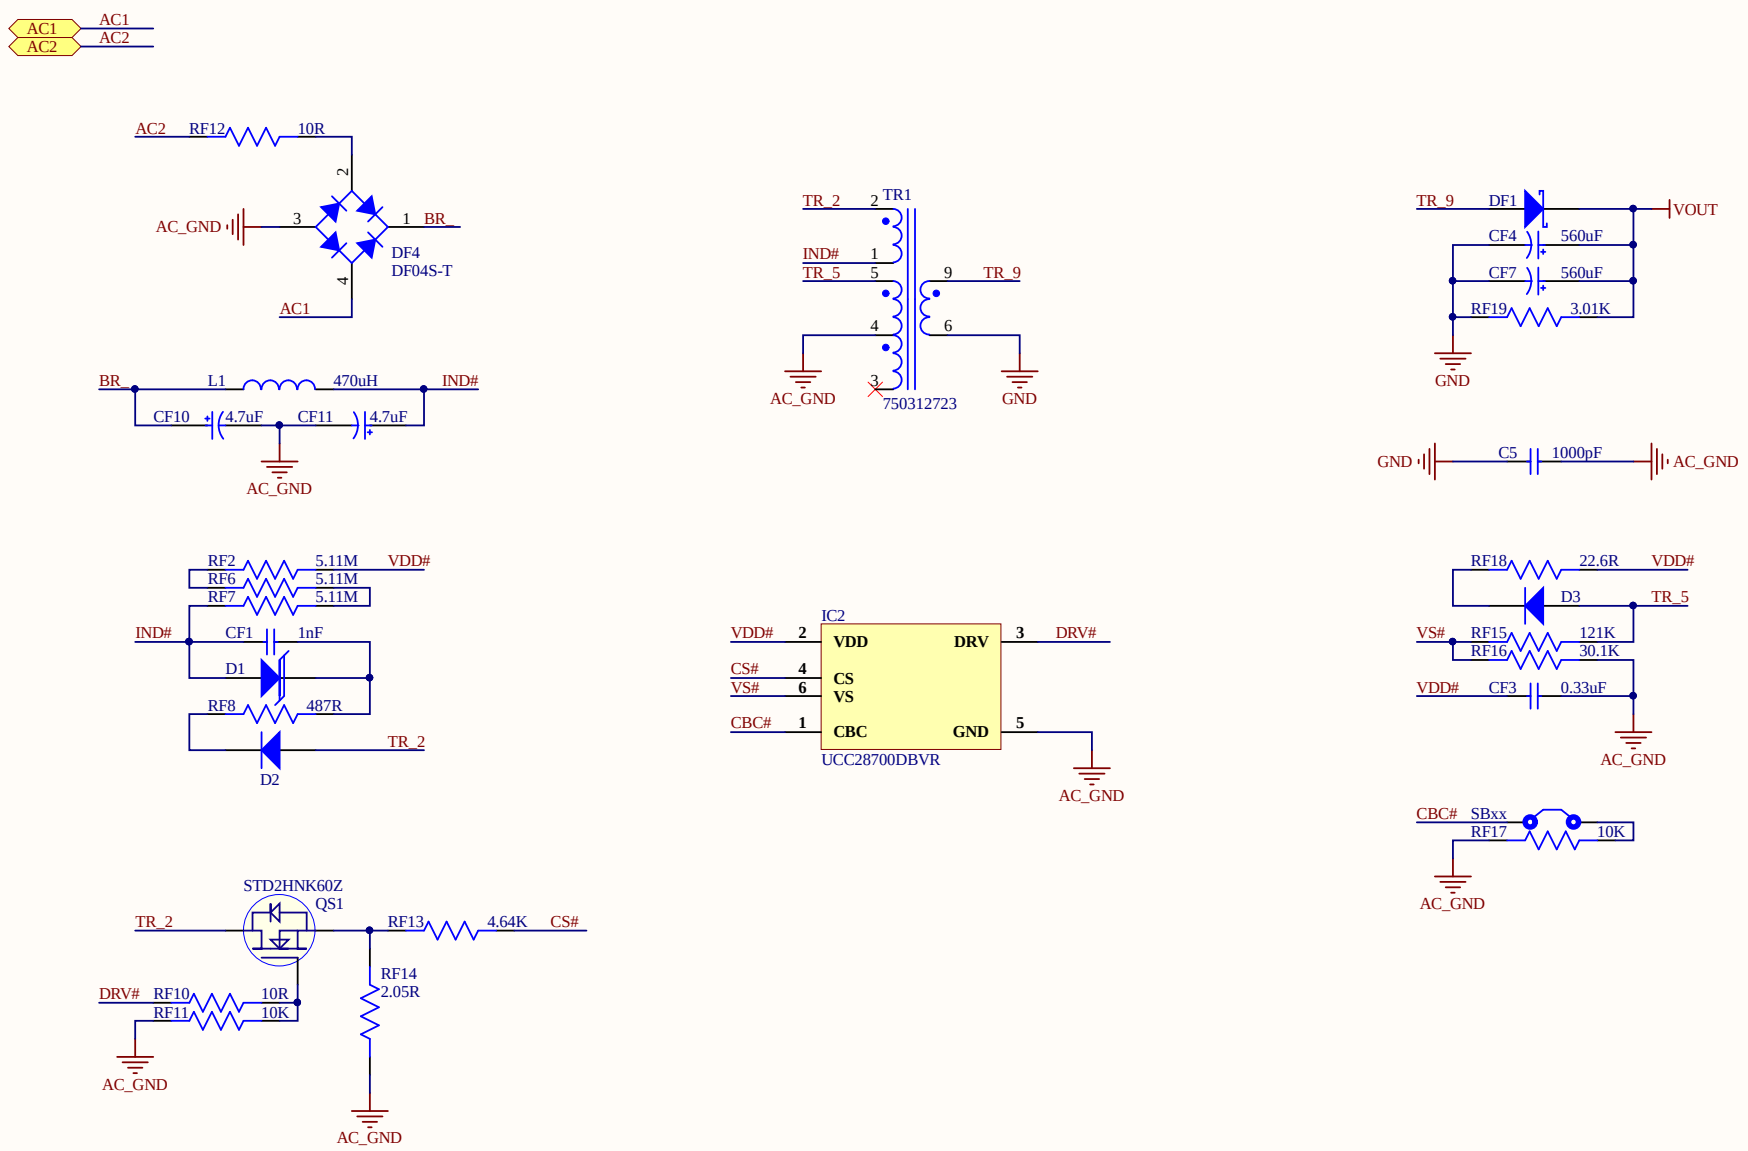




# Connector Section


AC1
AC2
AC2
RF12
10R
2
AC_GND
3
1
BR
DF4
DF04S-T
4
AC1
BR
L1
470uH
IND#
CF10
4.7uF
CF11
4.7uF
AC_GND
TR_2
2
TR1
IND#
1
TR_5
5
9
TR_9
4
6
3
AC_GND
750312723
GND
TR_9
DF1
VOUT
CF4
560uF
CF7
560uF
RF19
3.01K
GND
GND
C5
1000pF
AC_GND
RF2
5.11M
VDD#
RF6
5.11M
RF7
5.11M
IND#
CF1
1nF
D1
RF8
487R
TR_2
D2
IC2
VDD#
2
VDD
DRV
3
DRV#
CS#
4
CS
VS#
6
VS
CBC#
1
CBC
GND
5
UCC28700DBVR
AC_GND
RF18
22.6R
VDD#
D3
TR_5
VS#
RF15
121K
RF16
30.1K
VDD#
CF3
0.33uF
AC_GND
CBC#
SBxx
RF17
10K
AC_GND
STD2HNK60Z
QS1
TR_2
RF13
4.64K
CS#
RF14
2.05R
DRV#
RF10
10R
RF11
10K
AC_GND
AC_GND