



U_Power_Section
Power_Section.SchDoc
S_REG
A_REG
S_REG
A_REG
U_Audio_Section
Audio_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
#12-P
#13-P
#14-P
#15-P
#O_MIC
#O_MIC
U_Battery management Section
Battery management Section.SchDoc
CHG
B_ADC
CHG
B_ADC
U_Sensor_Section
Sensor_Section.SchDoc
SDA_
SCL_
LED#
CLED
SDA_
SCL_
LED#
CLED
U_SourceSelector_Section
SourceSelector_Section.SchDoc
S_SENS
S_SENS
U_Connector_Section
Connector_Section.SchDoc
RX
TX
RTS
DTR
RX
TX
RTS
DTR
AC_LINE
AC_Neutral
AC_LINE
AC_Neutral
U_Controller_Section
Controller_Section.SchDoc
#12-P
#13-P
#14-P
#15-P
#12-P
#13-P
#14-P
#15-P
CHG
B_ADC
#O_MIC
CHG
B_ADC
#O_MIC
RX
TX
RTS
DTR
RX
TX
RTS
DTR
SDA_
SCL_
SDA_
SCL_
LED#
CLED
S_REG
A_REG
S_SENS
LED#
CLED
S_REG
A_REG
S_SENS
U_Supply_Section
Supply_Section.SchDoc
AC_LINE
AC_Neutral
AC_LINE
AC_Neutral




Power Section

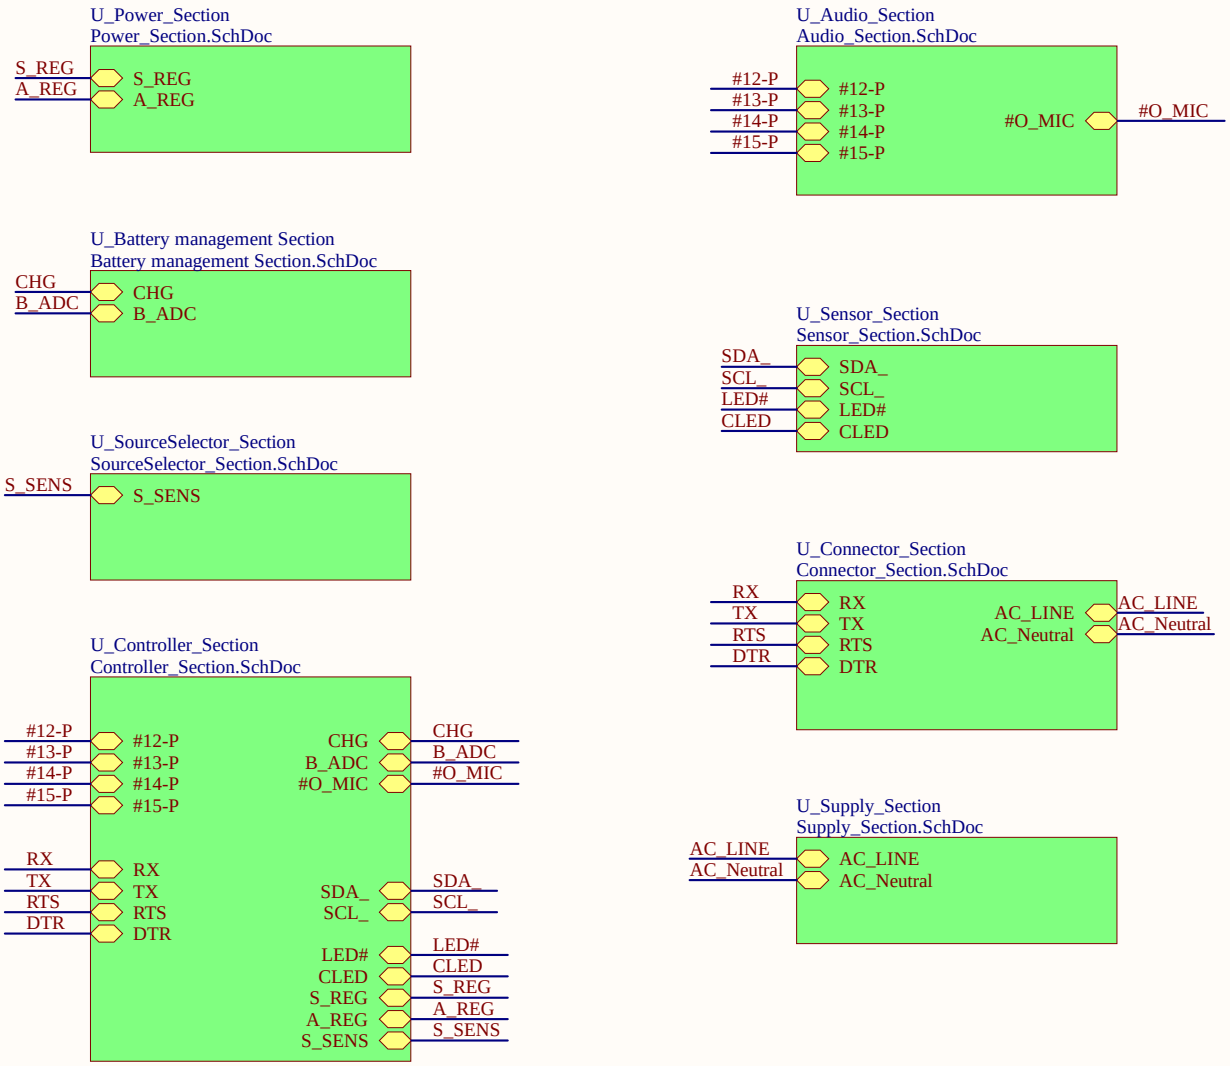

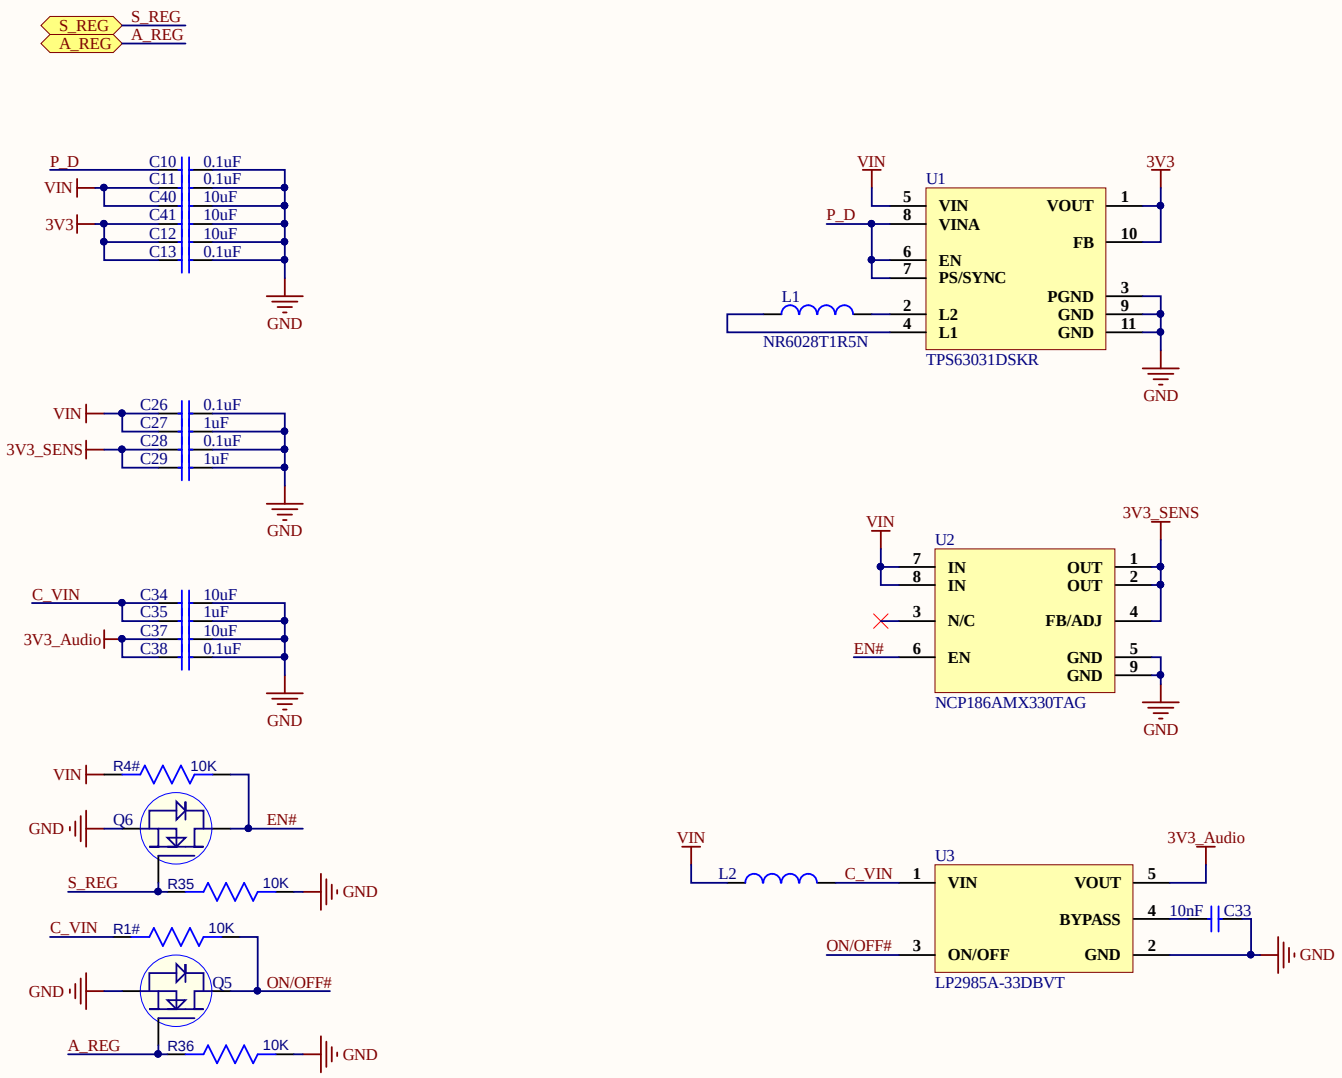

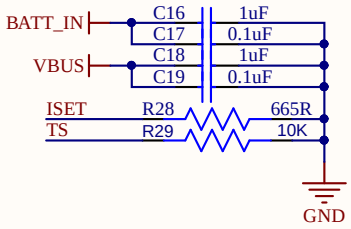


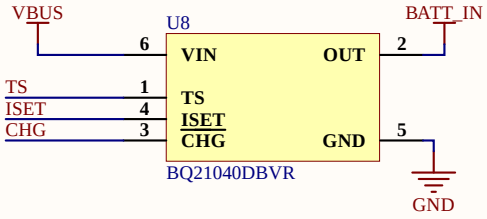


Place Decoupling Capacitor with there respective pins.


ISET Resistor Value is changed in Parameters, please be careful.


As per Datasheet, the value should not exceed 675 Ohm.

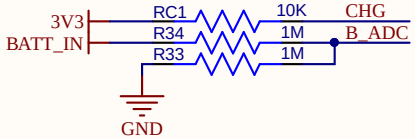






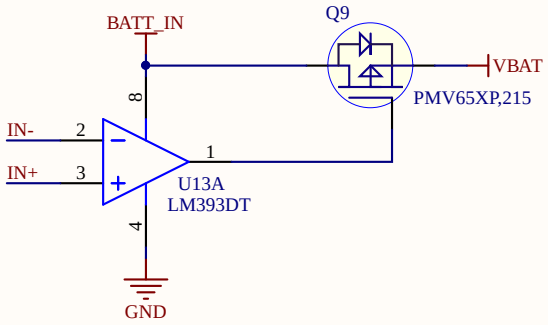





Battery Charging Section

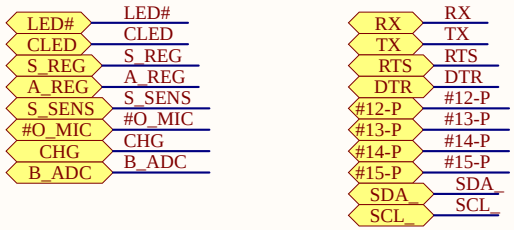



External Enable wouldn't be used as Development board already had circuit.


SW2 is being used for Software Reset.

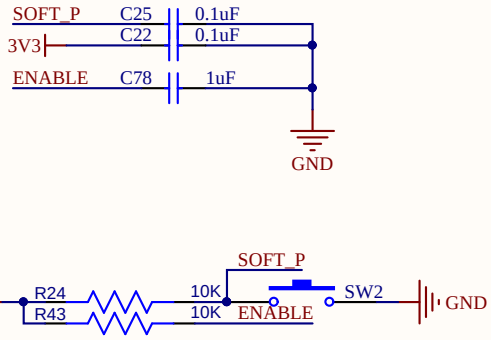

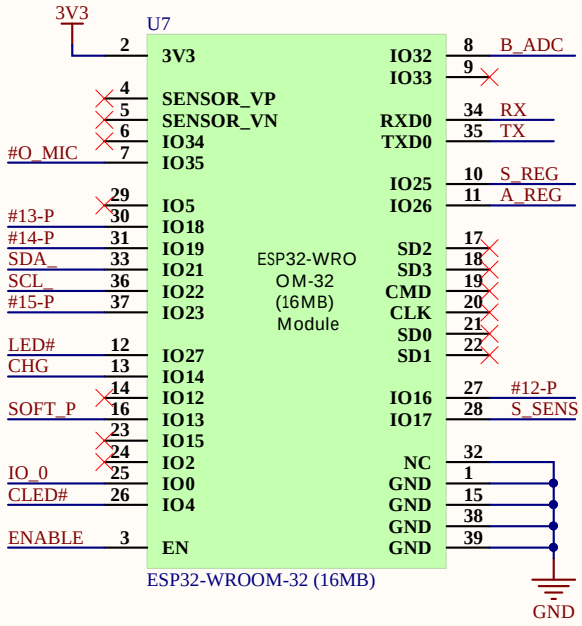


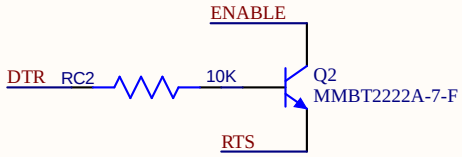

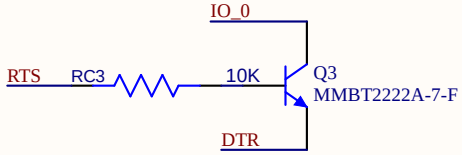


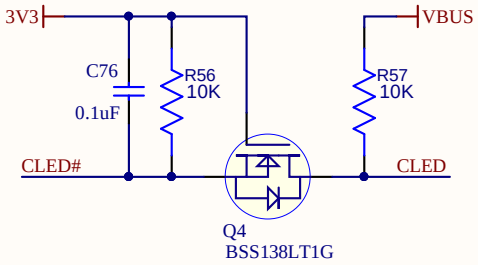



Controller Section

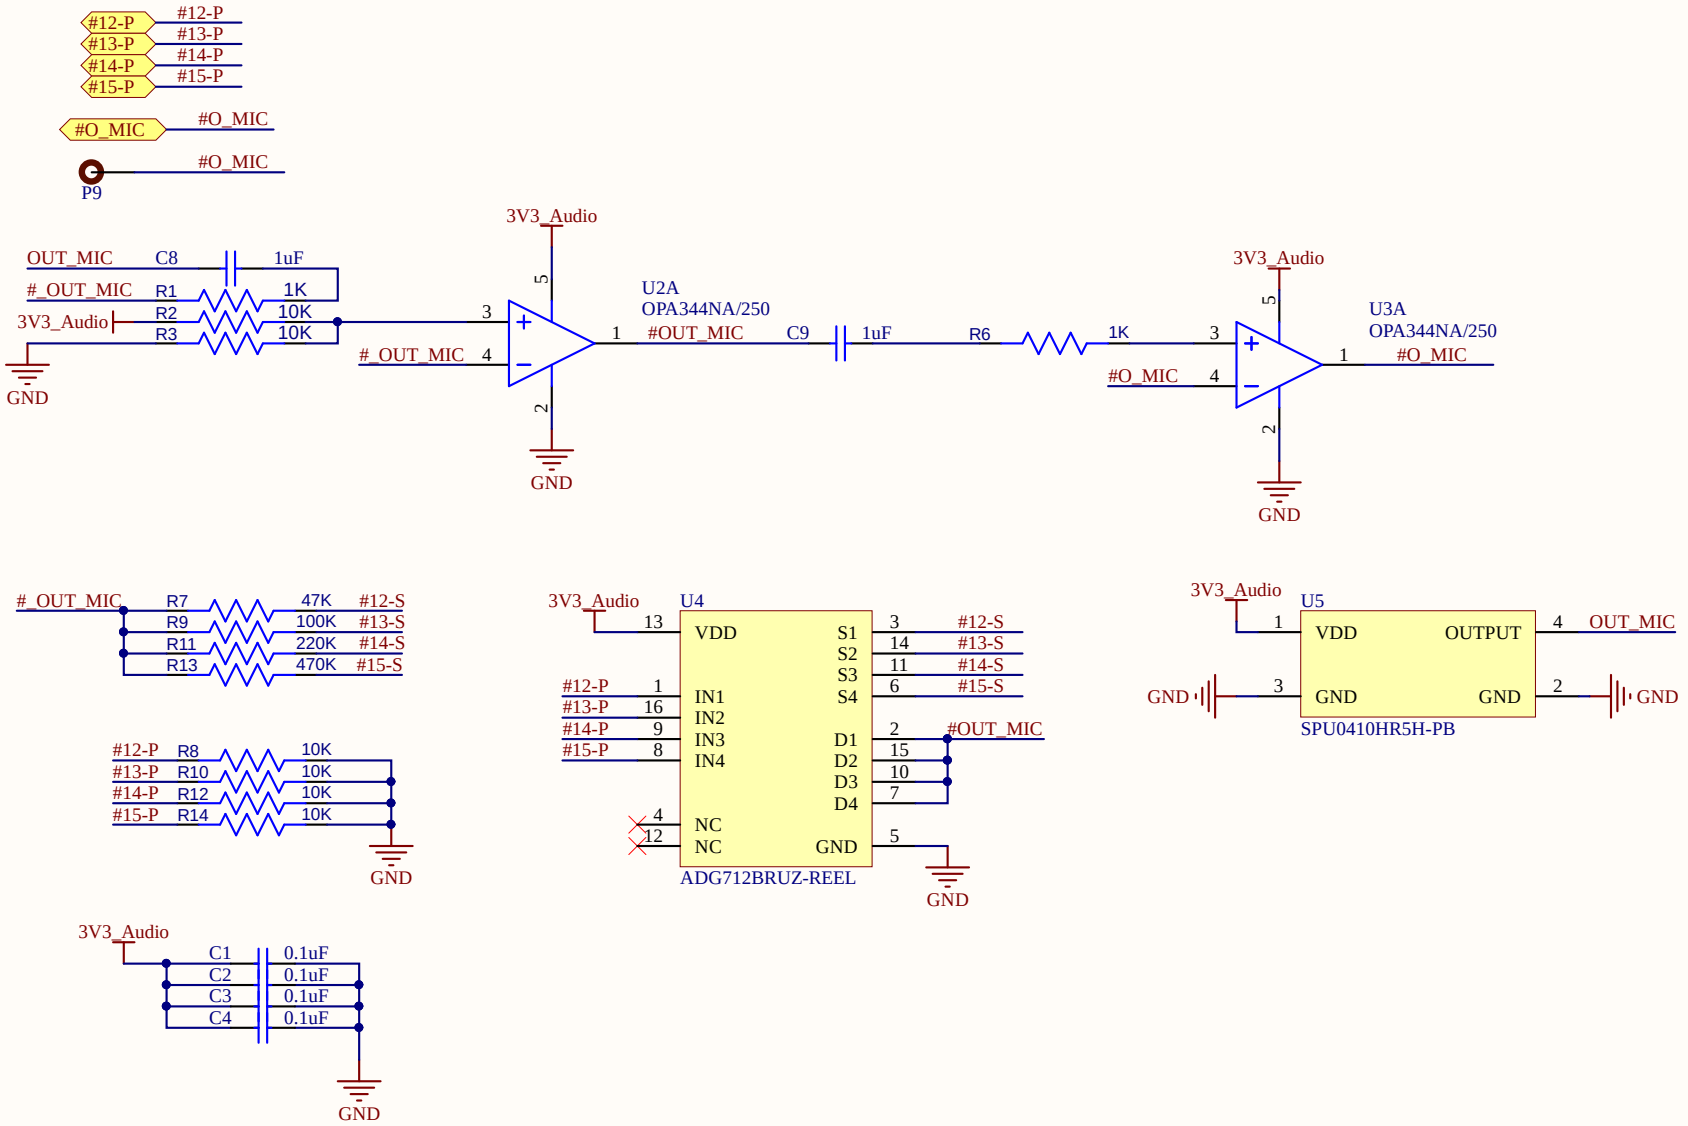



Audio Section








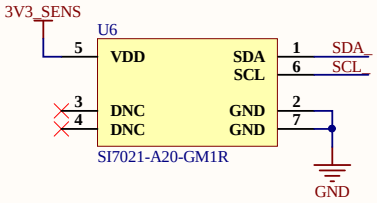

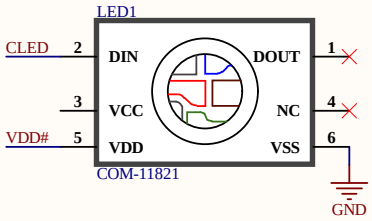



Sensor Section





Mentioned Capacitors will be placed with Battery Connector and with USB Main Connector.


No Need to place Decoupling Capacitors with Switch as this is just path.

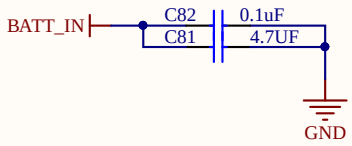








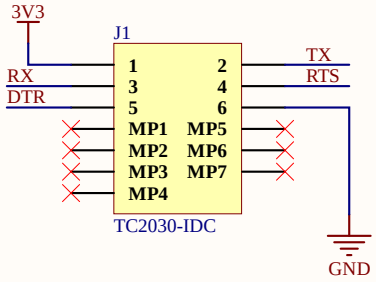


Connector Section

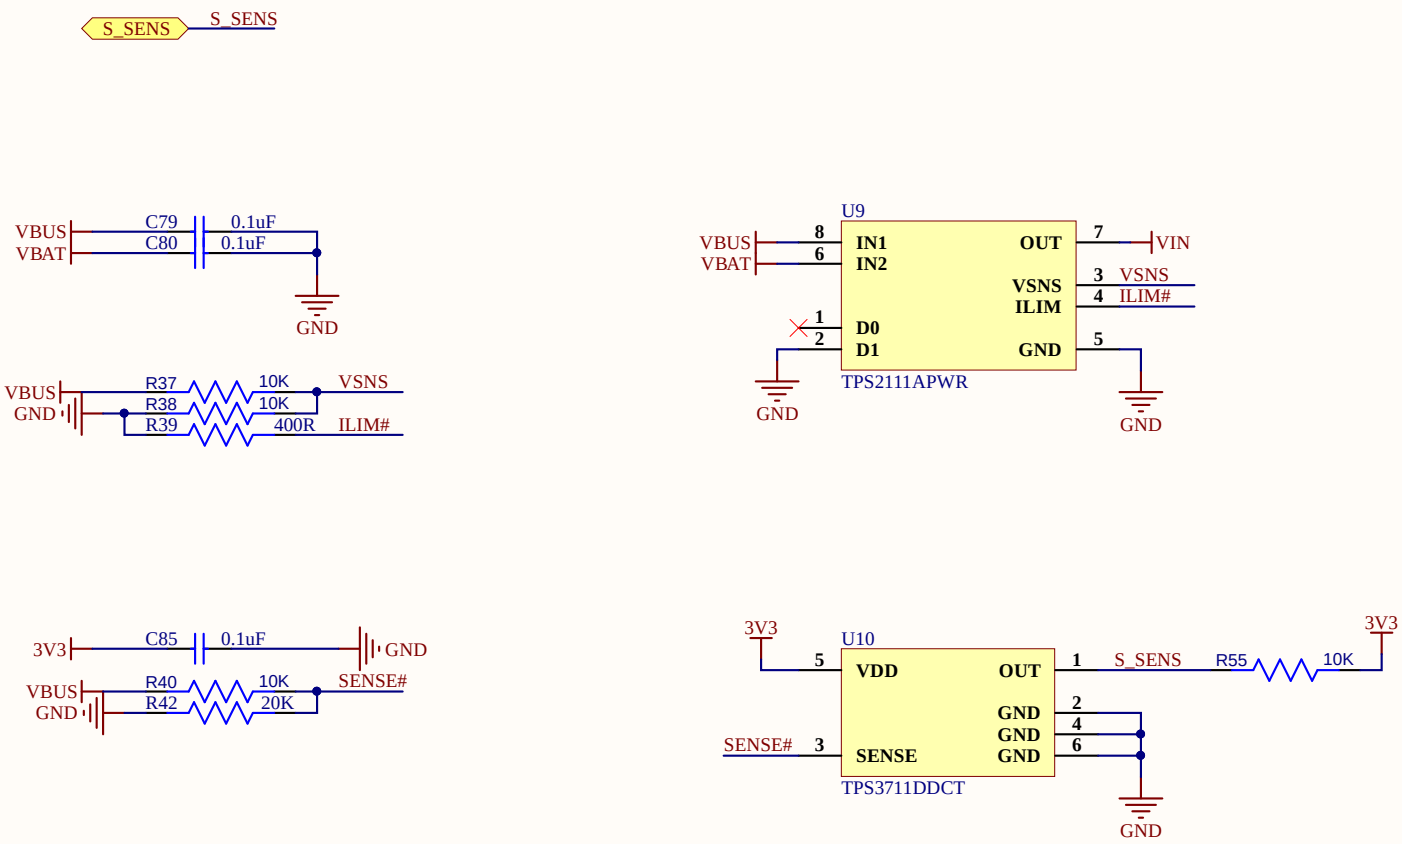


Title		
Size: A	Number	Revision
Date: 3/25/2021	Sheet of	
File: E:\GitHub\..\SourceSelector_Section.SchDoc	Drawn By:	





Title		
Size: A	Number	Revision
Date: 3/25/2021		Sheet of
File: E:\GitHub\..\Supply_Section.SchDoc		Drawn By:

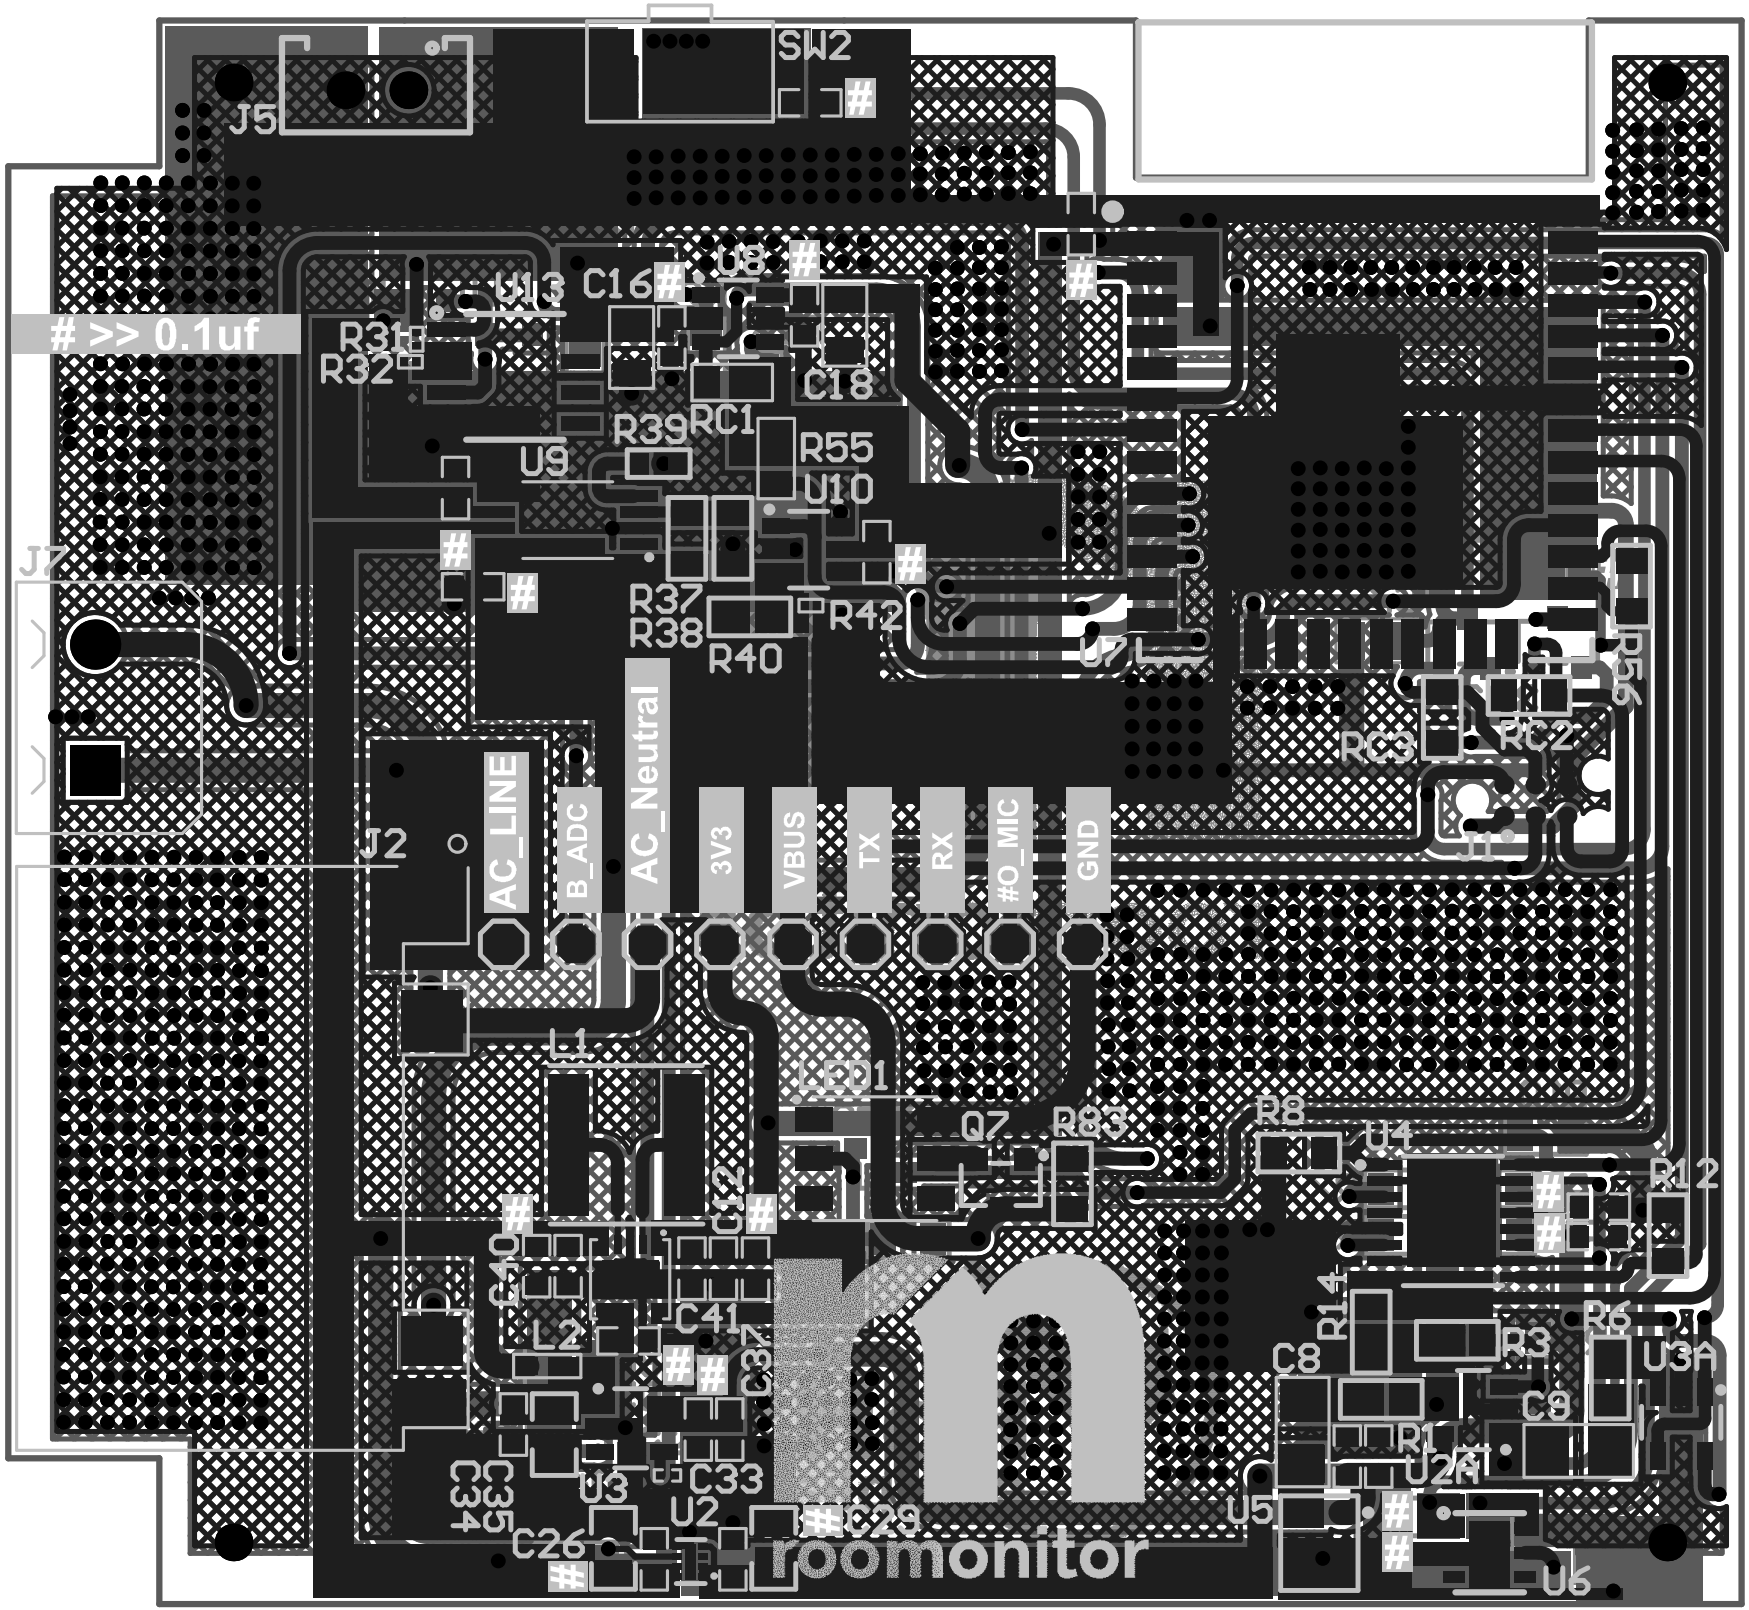
SW2
J5
U13
C16
U8
>> 0.1uf
R31
R32
C18
R39
RC1
R55
U9
U10
J7
R37
R38
R40
R42
U7
RC3
RC2
J2
AC_LINE
B_ADC
AC_Neutral
3V3
VBUS
TX
RX
#O_MIC
GND
L1
D1
Q7
R83
R8
U4
R12
C12
C40
C41
L2
C8
R14
R3
R6
U3A
C9
C8
R1
U2A
C33
C34
C35
U3
U2
C29
C26
U5
U6
roomonitor