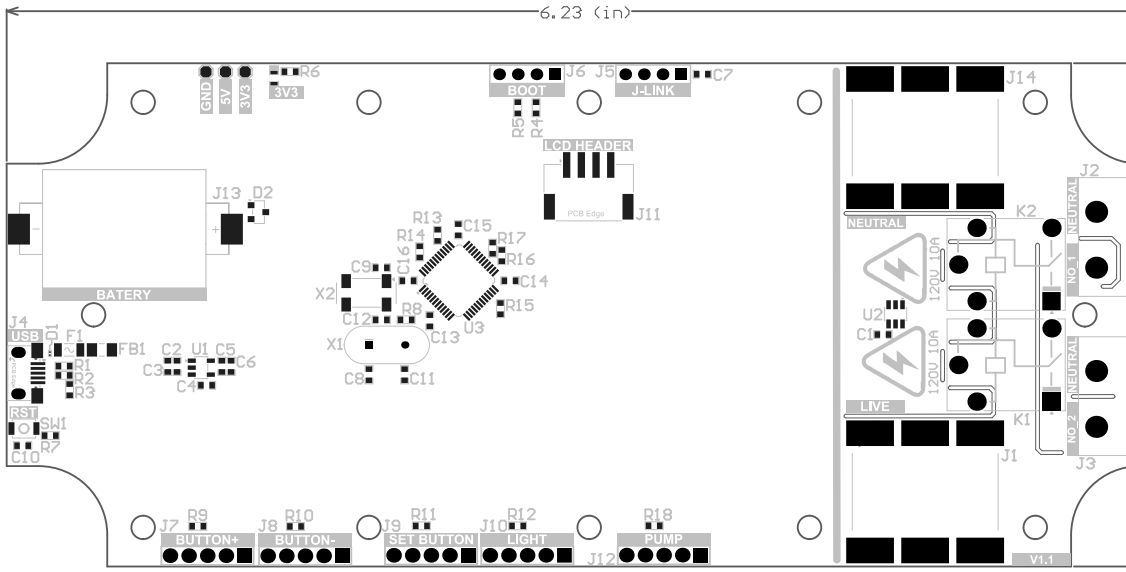
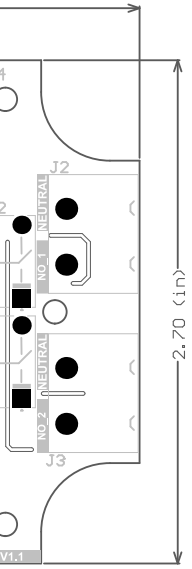
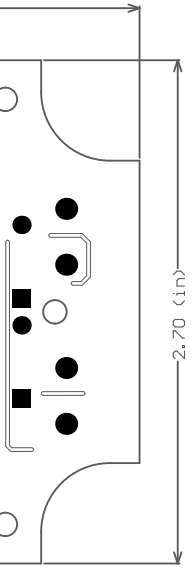

6.23 (in)
GND
5V
3V3
R6
3V3
BOOT
J6
J5
J-LINK
C7
J14
R5
R4
LCD HEADER
PCB Edge
J11
J2
J13
D2
BATERY
R13
C15
R14
R17
C16
R16
C9
C14
X2
R8
R15
C12
U3
C13
X1
C8
C11
J4
USB
F1
FB1
C2
U1
C5
C6
C3
R1
R2
R3
C4
RST
SW1
R7
C10
J7
R9
BUTTON+
J8
R10
BUTTON-
J9
R11
SET BUTTON
J10
R12
LIGHT
J12
R18
PUMP
NEUTRAL
K2
NO 1
120V 10A
U2
C1
120V 10A
NO 2
LIVE
K1
J1
J3
V1.1



Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				
Total board thickness:			63.00mil		

6.23 (in)
RoHS
compliant
ZERO CARBON FOOTPRINT
120V 10A
- + NC NO COM
- + NC NO COM
- + NC NO COM
- + NC NO COM
- + NC NO COM



Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	3.00mil	3.5	
1	Top Layer		10.00mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		10.00mil		
	Bottom Solder	Solder Resist	3.00mil	3.5	
	Bottom Overlay				
Total board thickness:			63.00mil		