
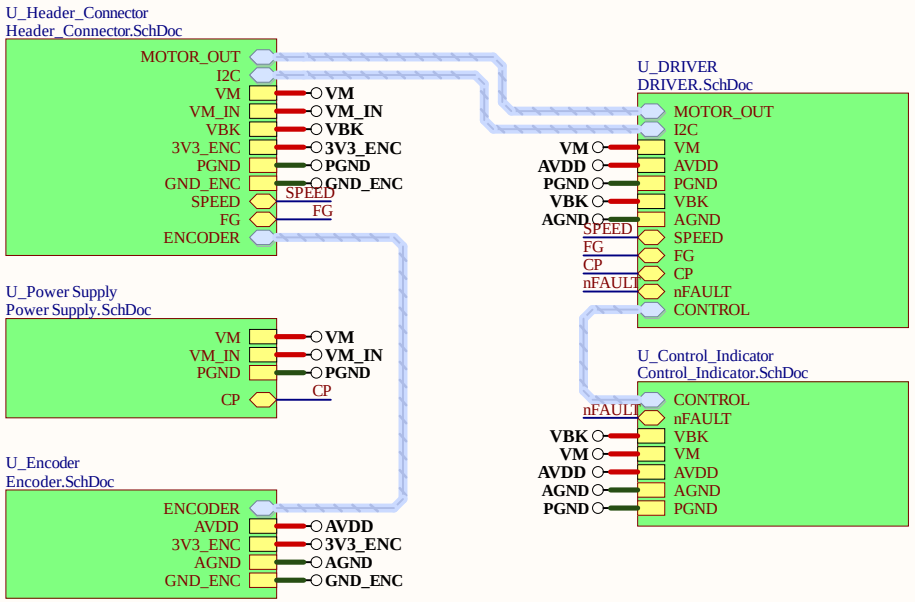


Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Top_Sheet.SchDoc	
File: BOB.PrjPcb	
Date: 11/2/2022	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 6

Reverse Polarity Protection

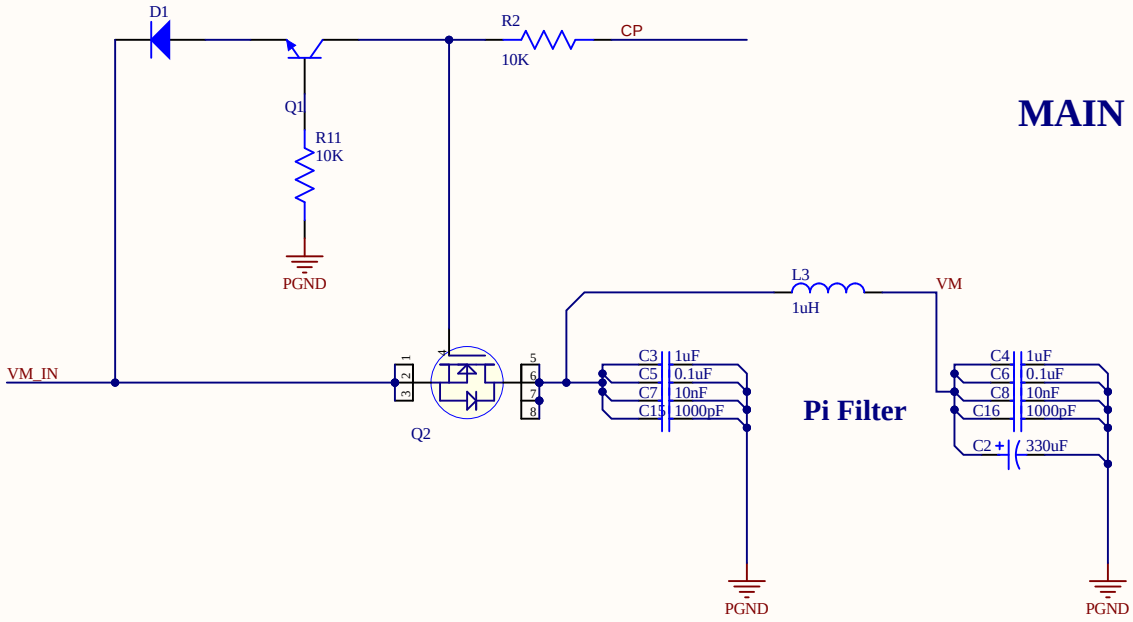

MAIN SUPPLY

4.5-V to 35-V Operation
40V ABS MAX

VM-IN is for PI filter and RPP.
VM is to bypass PI filter and RPP.

Pi Filter


CP — CP

VM — VM
VM_IN — VM_IN
PGND — PGND

Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.


Title: Power Supply.SchDoc	
File: BOB.PrjPcb	
Date: 11/4/2022	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 6

DRIVER

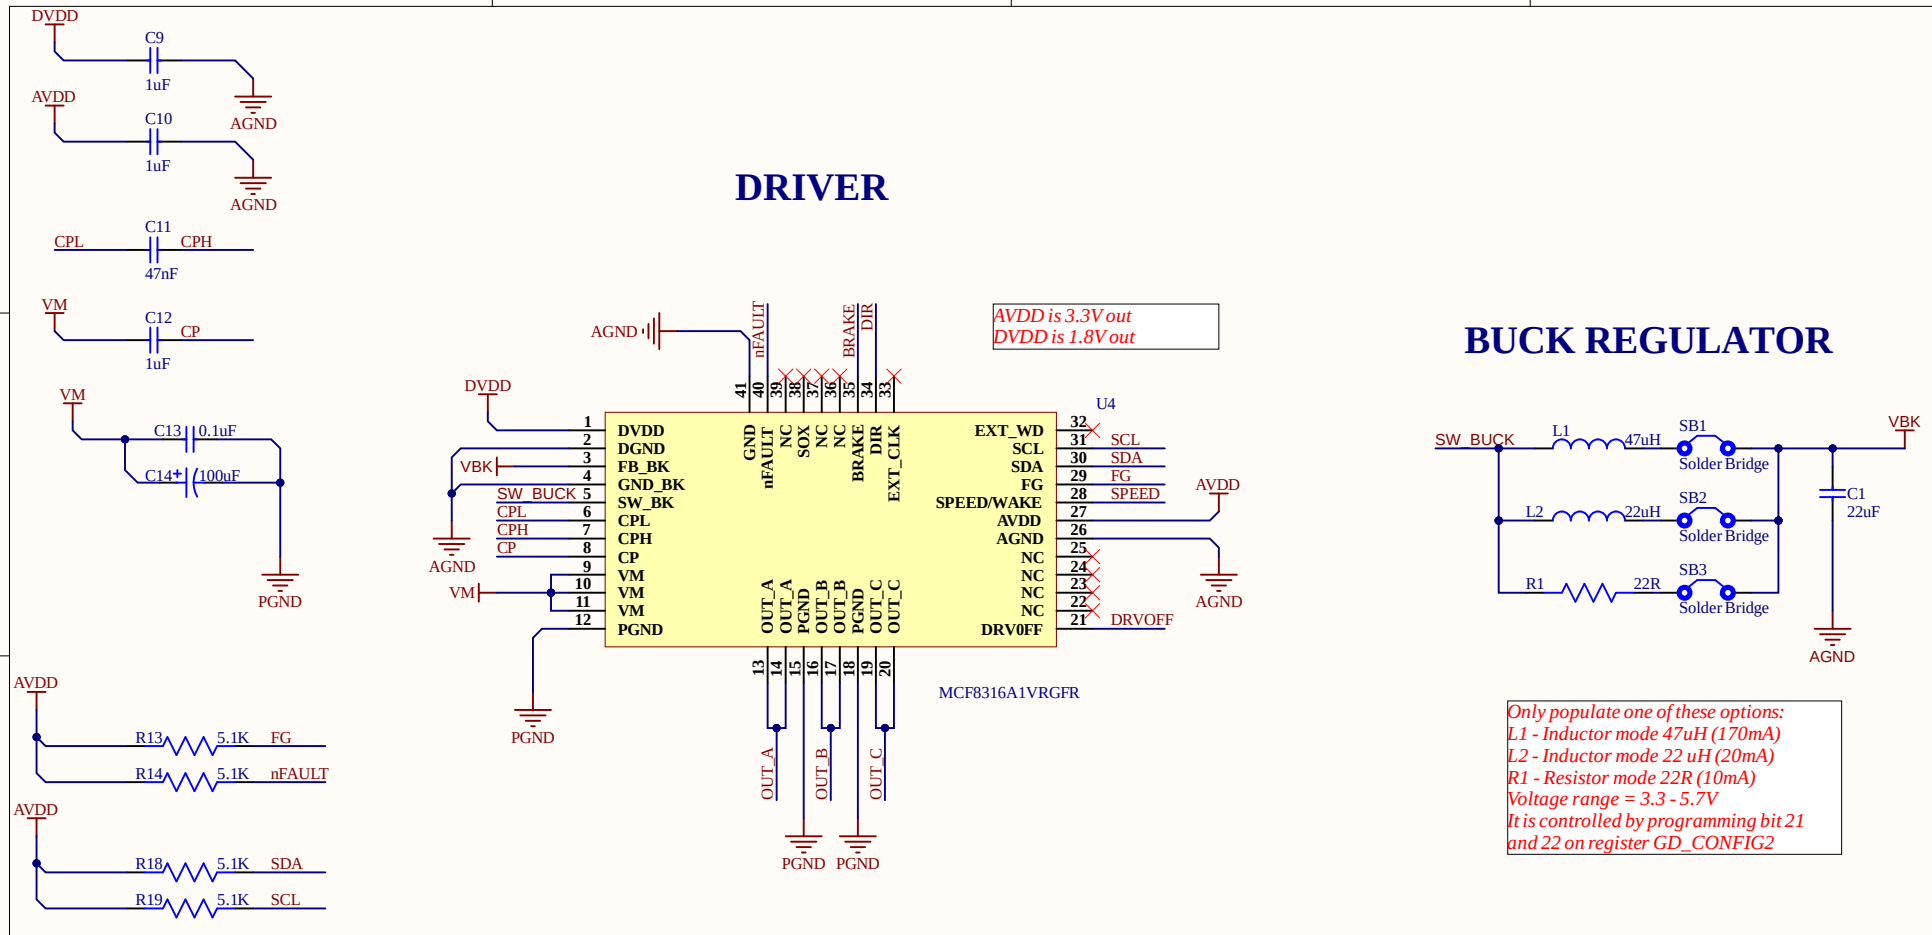


BUCK REGULATOR

Only populate one of these options:
L1 - Inductor mode 47uH (170mA)
L2 - Inductor mode 22 uH (20mA)
R1 - Resistor mode 22R (10mA)
Voltage range = 3.3 - 5.7V
It is controlled by programming bit 21 and 22 on register GD_CONFIG2

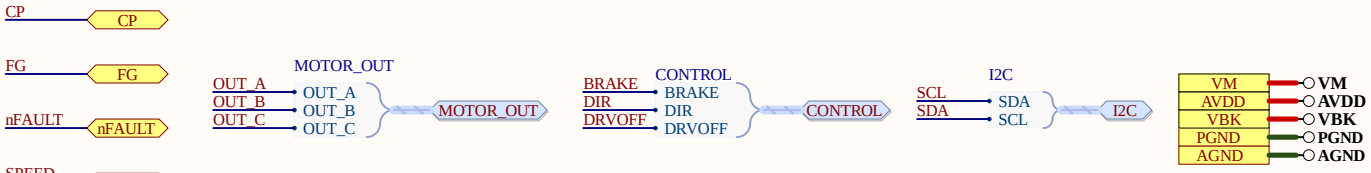


Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: DRIVER.SchDoc	
File: BOB.PrjPcb	
Date: 11/4/2022	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 6

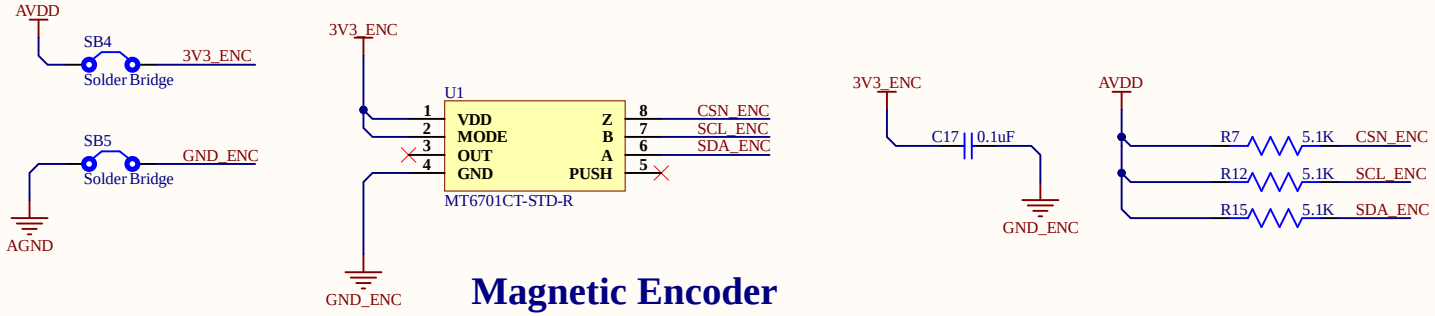

Magnetic Encoder






Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.


Title: Encoder.SchDoc	
File: BOB.PrjPcb	
Date: 11/4/2022	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 6


INDICATOR

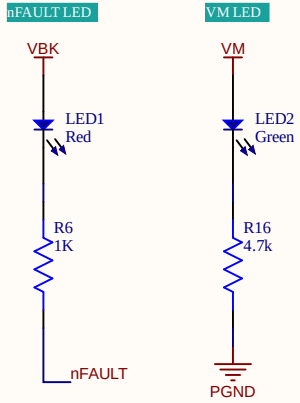


CONTROL

3 Controlling switches
DIR
BRAKE
DRVOFF

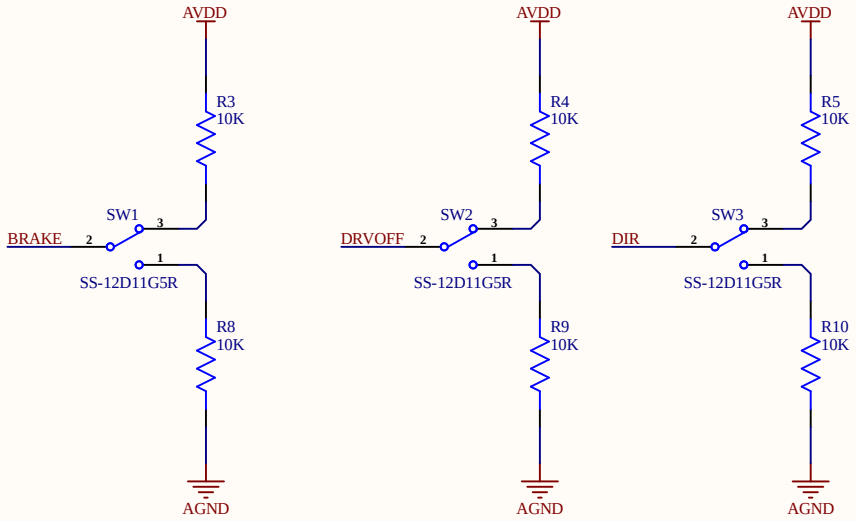









Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.

Title: Control_Indicator.SchDoc	
File: BOB.PrjPcb	
Date: 11/4/2022	Page Num: 5
Drawn By: Huzaifa Ali	Page Total: 6

CONNECTORS / HEADERS

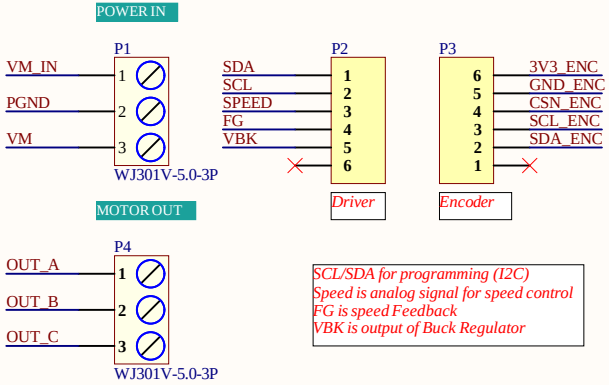

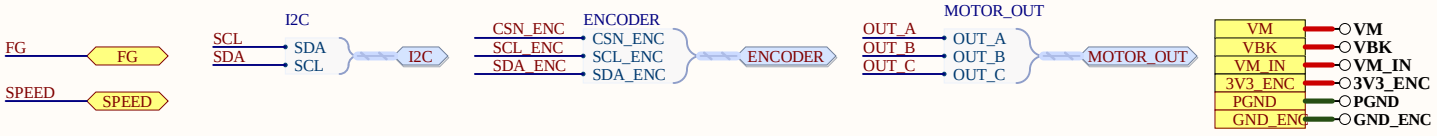

Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: Header_Connector.SchDoc	
File: BOB.PrjPcb	
Date: 11/4/2022	Page Num: 6
Drawn By: Huzaifa Ali	Page Total: 6

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.50mil	3.5	
1	Top Layer		12.50mil		
	Dielectric 1	FR-4	37.00mil	4.8	
2	Bottom Layer		12.50mil		
	Bottom Solder	Solder Resist	0.50mil	3.5	
	Bottom Overlay				

