


U_Control_Indicator
Control_Indicator.SchDoc




U_DRIVER
DRIVER.SchDoc



U_Encoder
Encoder.SchDoc




U_Power Supply
Power Supply.SchDoc



Title			
Size A4	Number		Revision
Date:	10/23/2022	Sheet of	
File:	C:\Users\..\Top_Sheet.SchDoc	Drawn By:	


MAIN SUPPLY

Reverse Polarity Protection

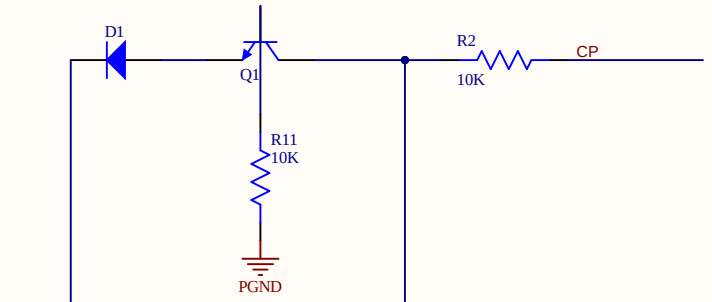


4.5-V to 35-V Operation
40V ABS MAX

VM-IN is for PI filter and RPP.
VM is to bypass PI filter and RPP.

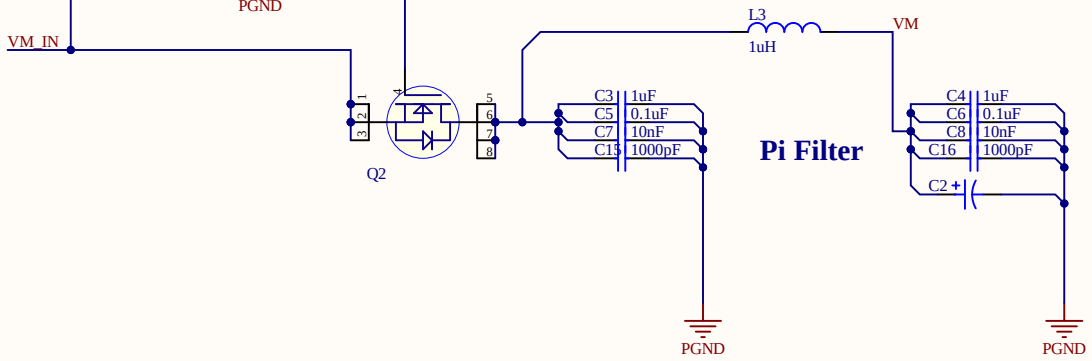


Pi Filter

CONNECTORS / HEADERS

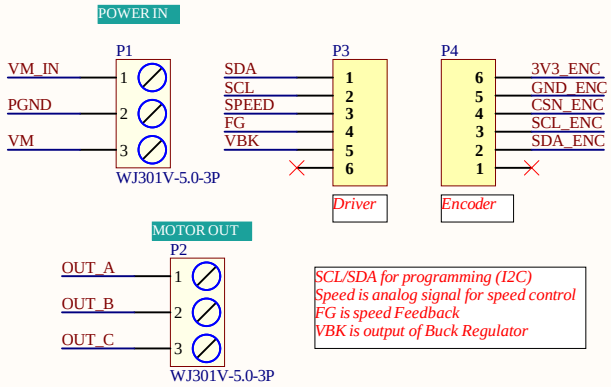

SCL/SDA for programming (I2C)
Speed is analog signal for speed control
FG is speed Feedback
VBK is output of Buck Regulator


Title		
Size: A4	Number	Revision
Date: 10/23/2022		Sheet of
File: C:\Users\..\Power Supply.SchDoc		Drawn By:

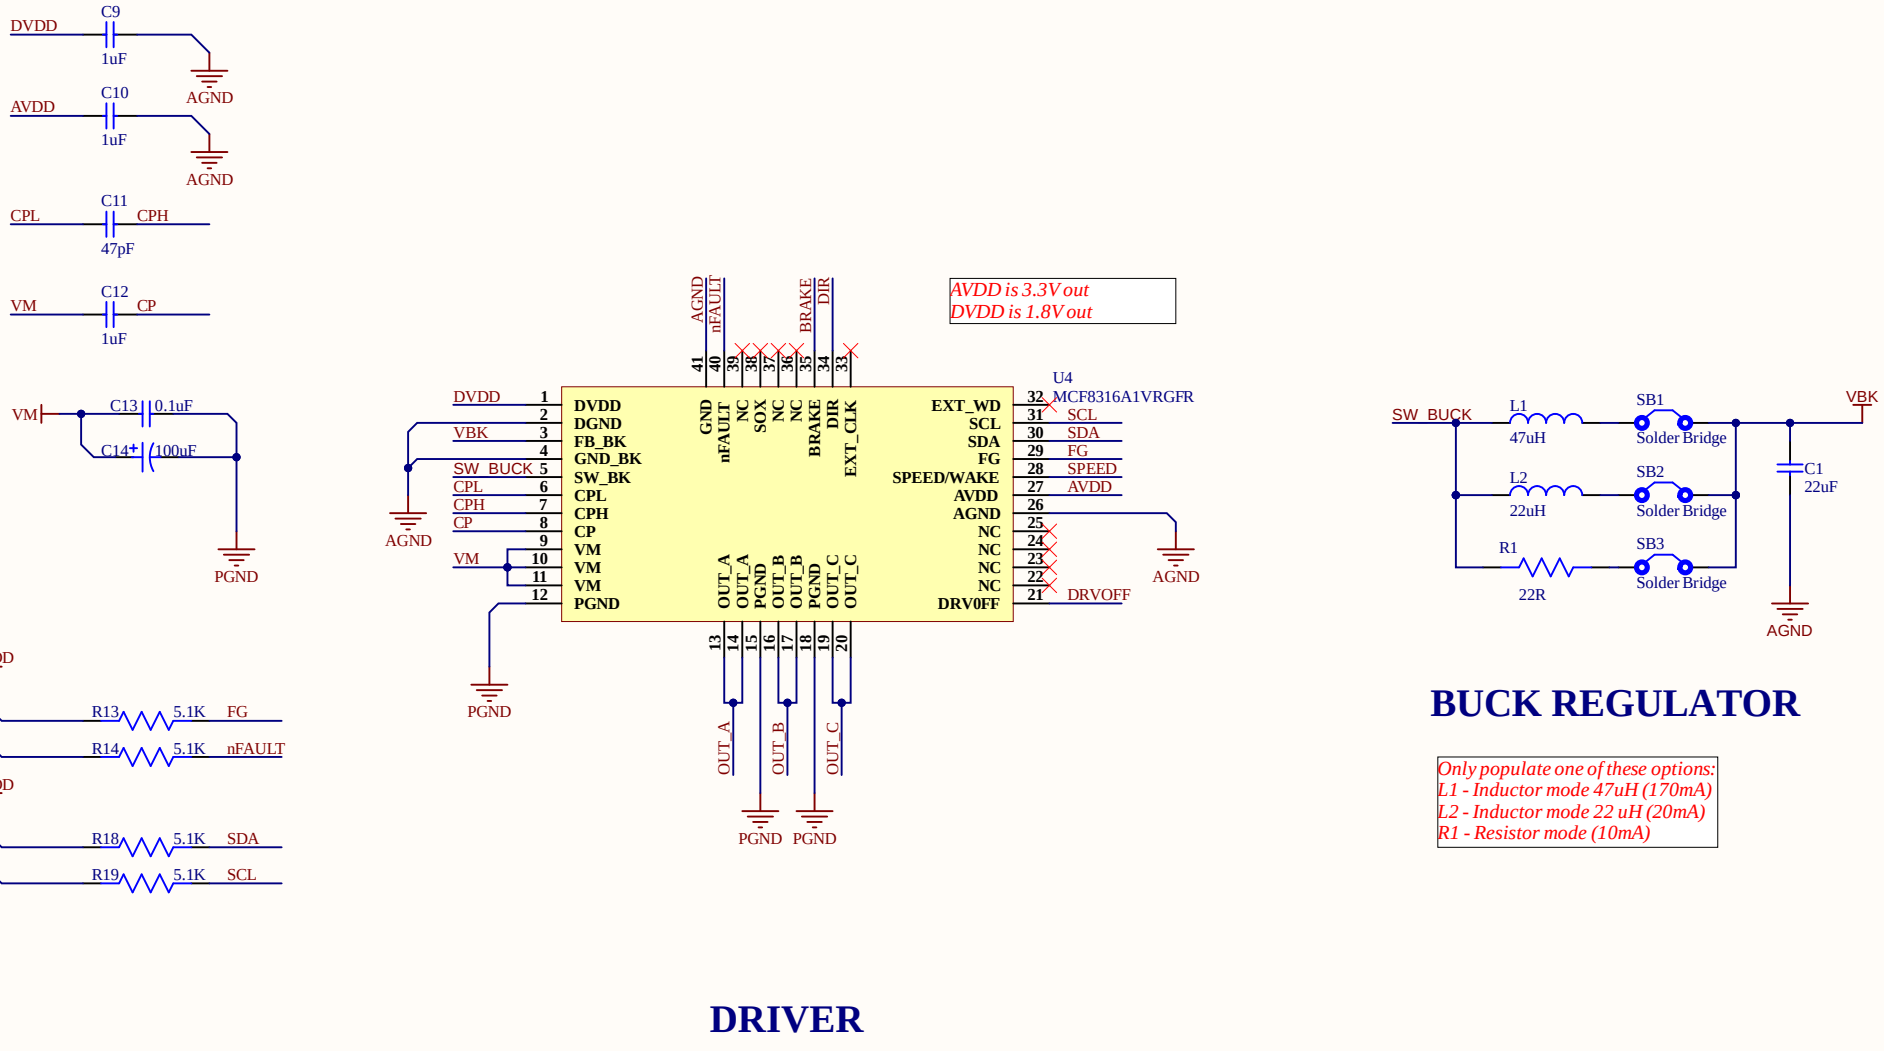

DRIVER

BUCK REGULATOR


Title		
Size: A4	Number	Revision
Date: 10/23/2022		Sheet of
File: C:\Users\..\DRIVER.SchDoc		Drawn By:

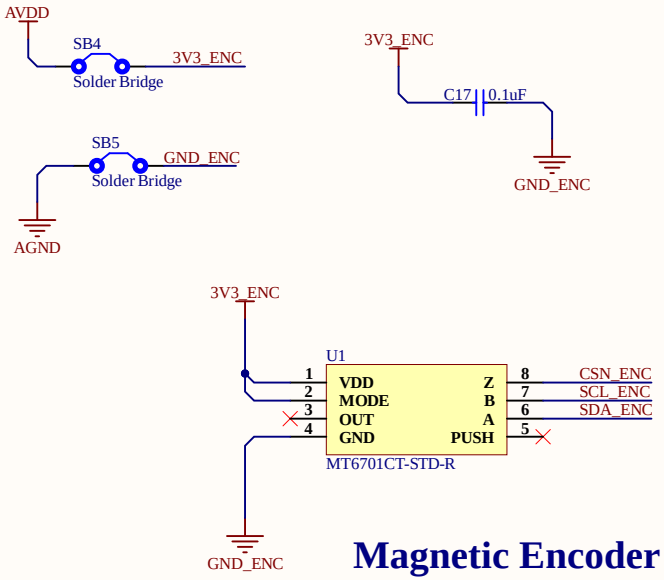

Magnetic Encoder


Title		
Size: A4	Number	Revision
Date: 10/23/2022		Sheet of
File: C:\Users\..\Encoder.SchDoc		Drawn By:

INDICATOR

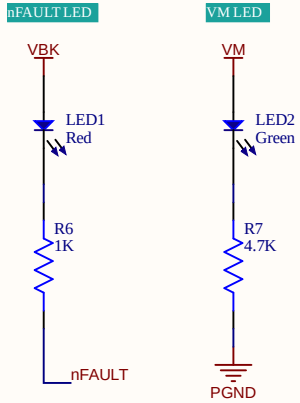

CONTROL

3 Controlling switches
DIR
BRAKE
DRVOFF

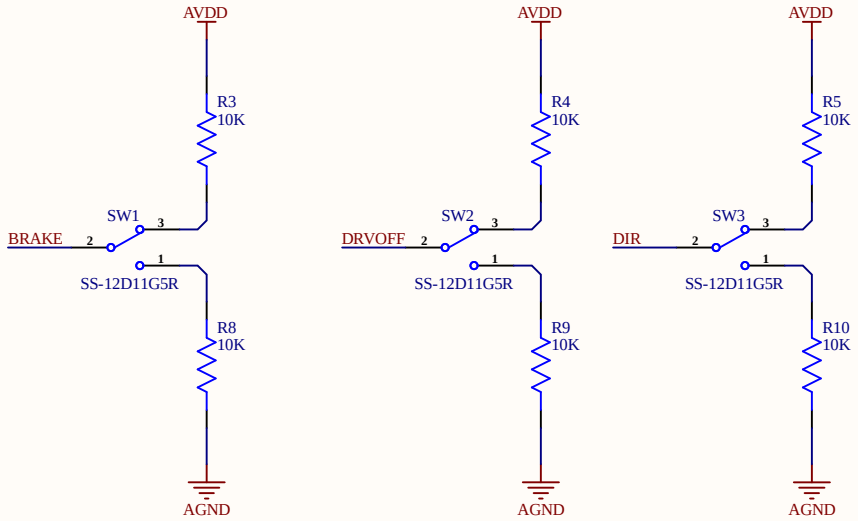

Title			
Size A4	Number		Revision
Date:	10/23/2022	Sheet of	
File:	C:\Users\..\Control_Indicator.SchDoc	Drawn By:	