
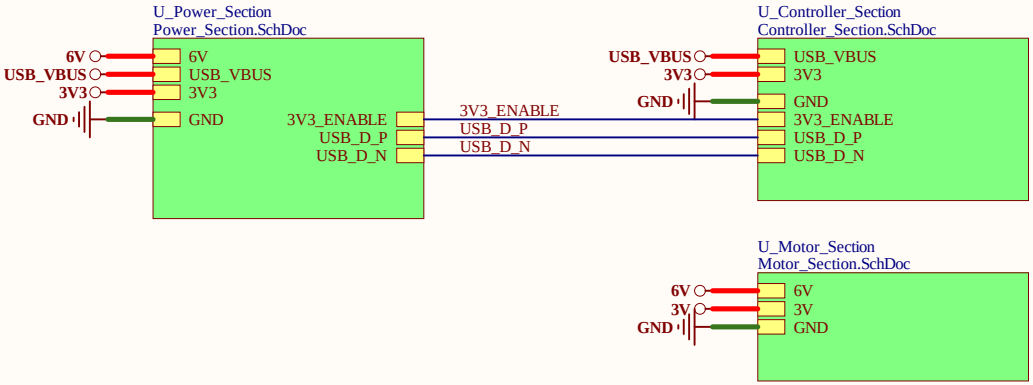



Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: TopSheet.SchDoc	
File: DC-Motor-Driver-v1.0.PrjPcb	
Date: 11/6/2023	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 4

BATTERY

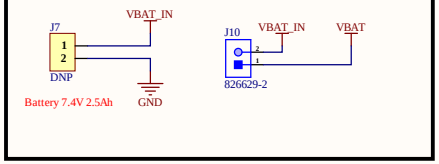


BATTERY SUPERVISORY CIRCUIT

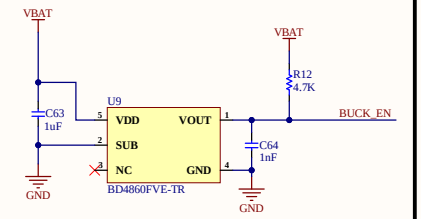


Active LOW. When battery voltage drops below 6V, VOUT will become LOW disabling power section


USB

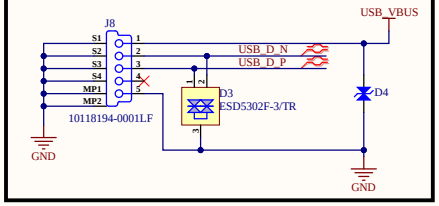

POWER SWITCH FOR BATTERY CUTOFF

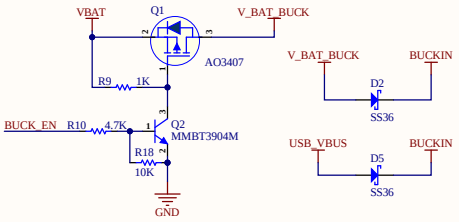


6V BUCK REGULATOR

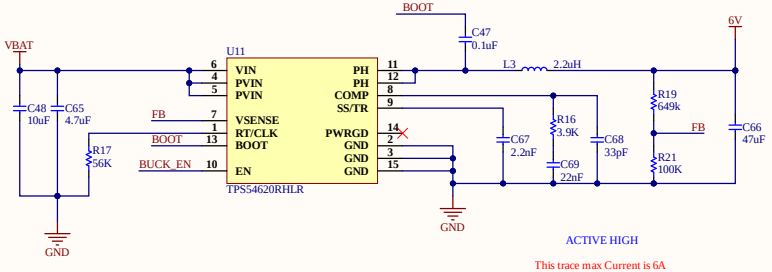

ACTIVE HIGH


This trace max Current is 6A

3V3 BUCK REGULATOR

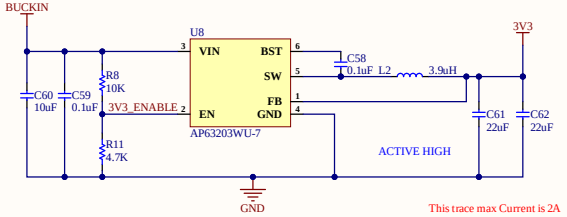


ACTIVE HIGH

This trace max Current is 2A




Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.


Title: Power_Section.SchDoc	
File: DC-Motor-Driver-v1.0.PrjPcb	
Date: 11/6/2023	Page Num: 2
Drawn By: Huzaifa Ali	Page Total: 4

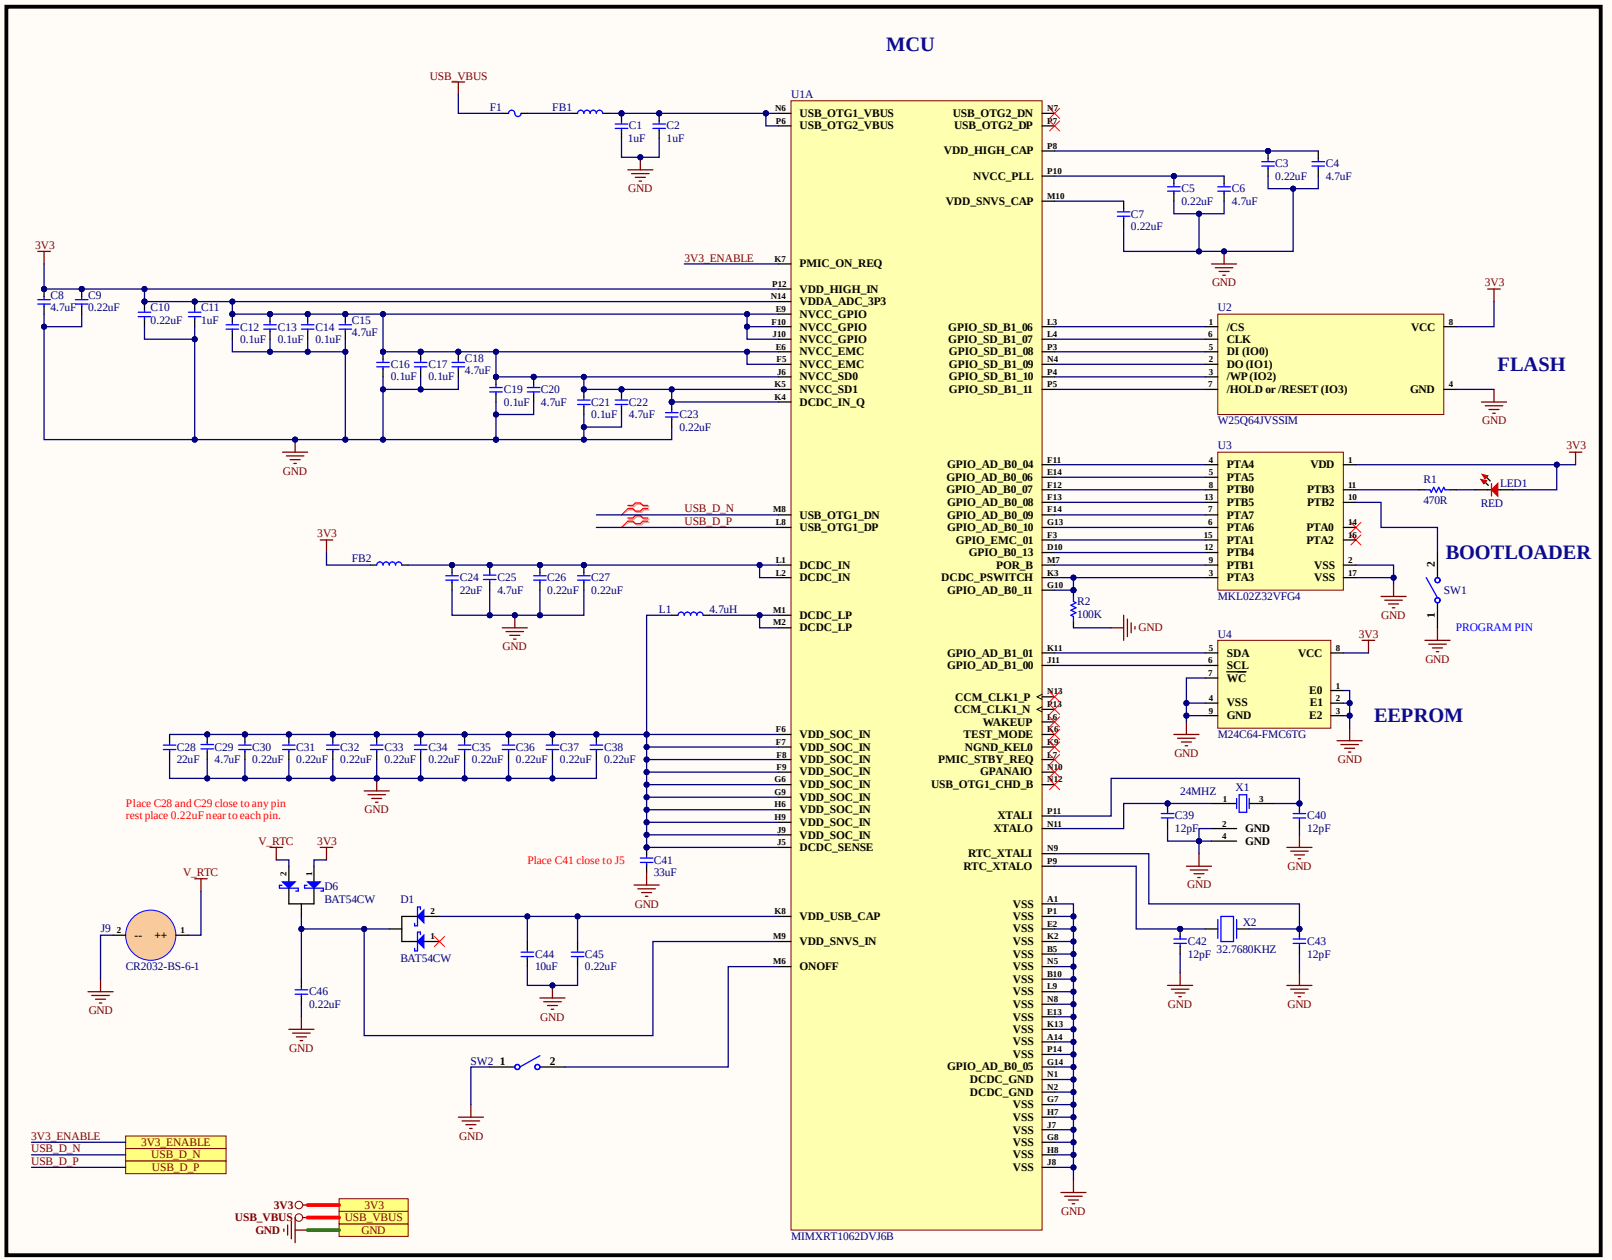



Cannot open file D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg. File does not exist.


Title: Controller_Section.SchDoc	
File: DC-Motor-Driver-v1.0.PrjPcb	
Date: 11/6/2023	Page Num: 3
Drawn By: Huzaifa Ali	Page Total: 4

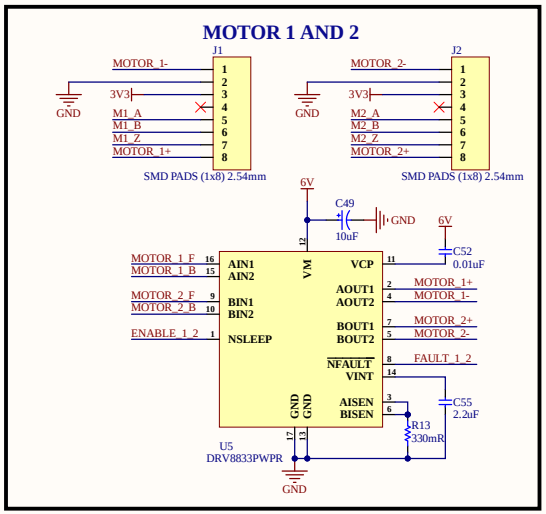


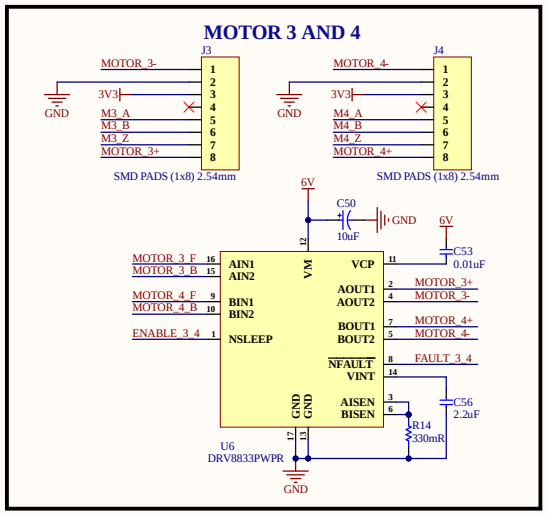


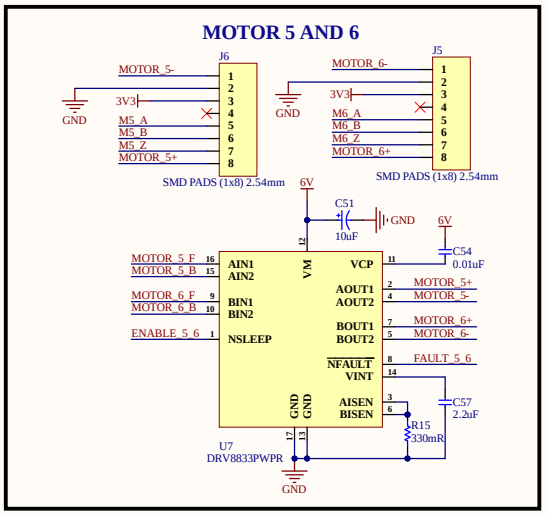

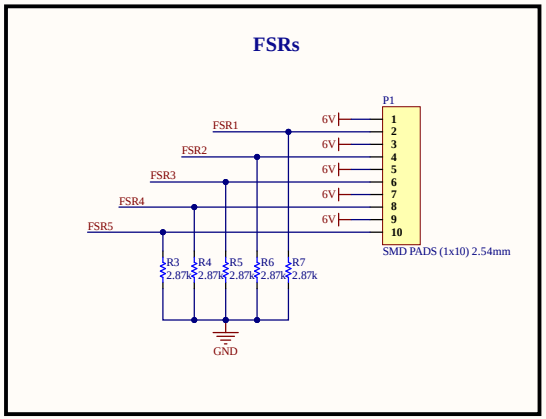

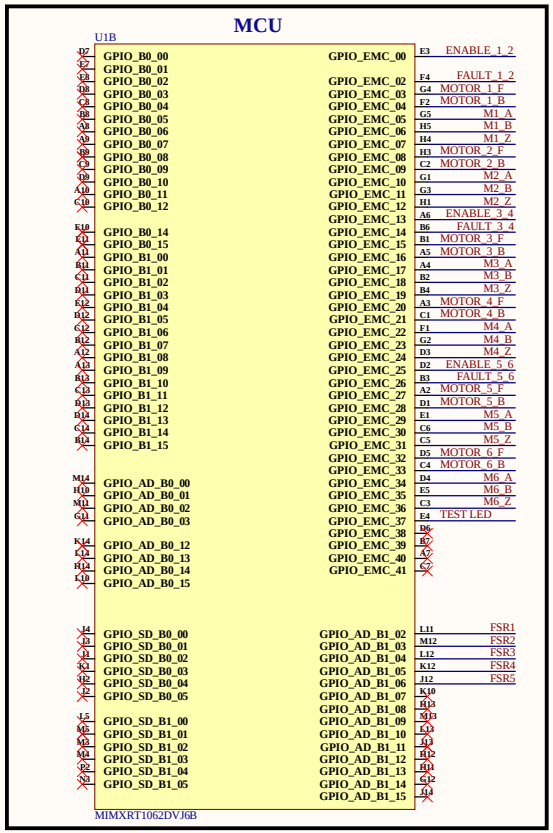


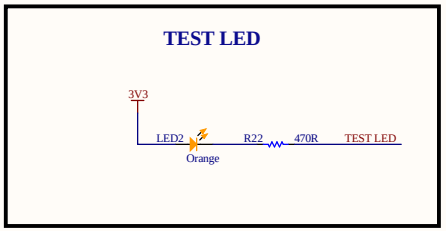



Cannot open file
D:\eSpark-Consultants\eSpark-Hardware\Altium Template\espark-consulting-group-800x300.jpg.
File does not exist.

Title: Motor_Section.SchDoc	
File: DC-Motor-Driver-v1.0.PrjPcb	
Date: 11/6/2023	Page Num: 4
Drawn By: Huzaifa Ali	Page Total: 4

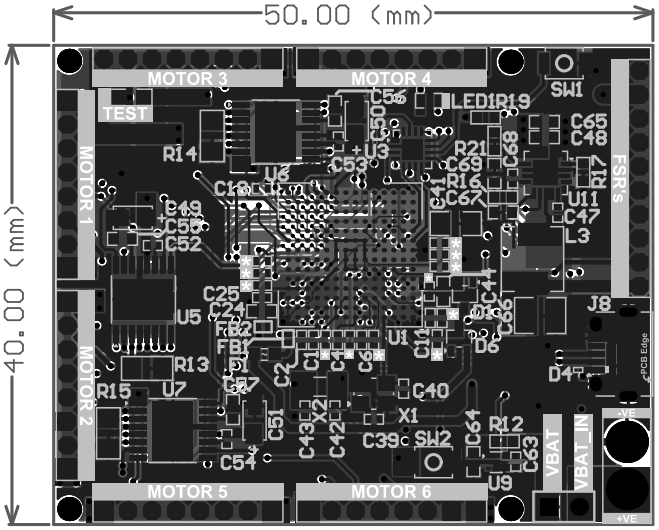

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.50mil	3.5	
1	Top Layer		1.18mil		
	Dielectric 2	PP-006	8.28mil	4.1	
2	Signal 1	CF-004	0.60mil		
	Dielectric 1	FR-4	41.93mil	4.8	
3	Signal 2	CF-004	0.60mil		
	Dielectric 3	PP-006	8.28mil	4.1	
4	Bottom Layer		1.18mil		
	Bottom Solder	Solder Resist	0.50mil	3.5	
	Bottom Overlay				
Total board thickness:			63.06mil		