


Battery Charger Section

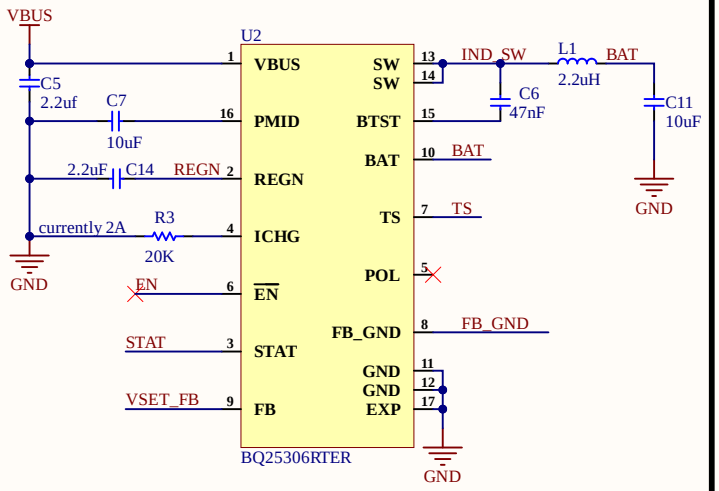

USB Type-C PD Sink Controller

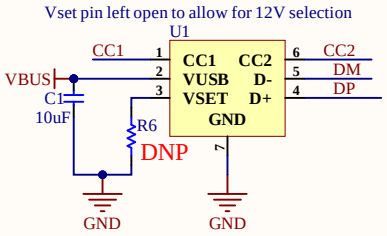

TYPE_C Power Input

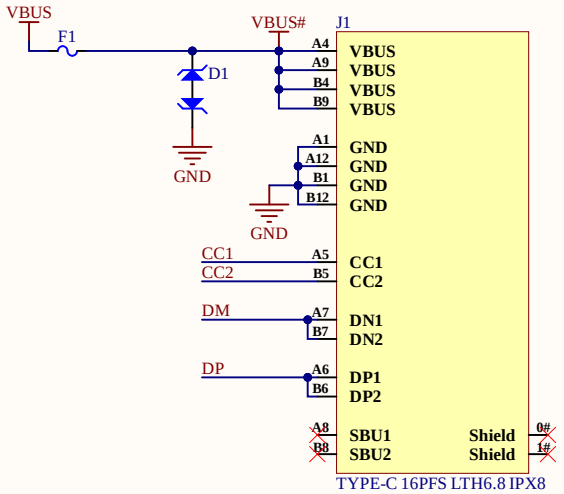


VUSB trace current 2A


Decoupling capacitors should be placed close to each VBUS pin

ESD Diode is to be placed in manner that it has minimum impedance path with VBUS


XT-30_BAT



BAT_VSENSE



TEMP_SENSE



LED_HMI



currently Led current at 3mA

Title: Power_Sheet.SchDoc	
File: Internal Battery Charger - v1.0.PrjPcb	
Date: 03/12/2024	Page Num: 1
Drawn By: Huzaifa Ali	Page Total: 1