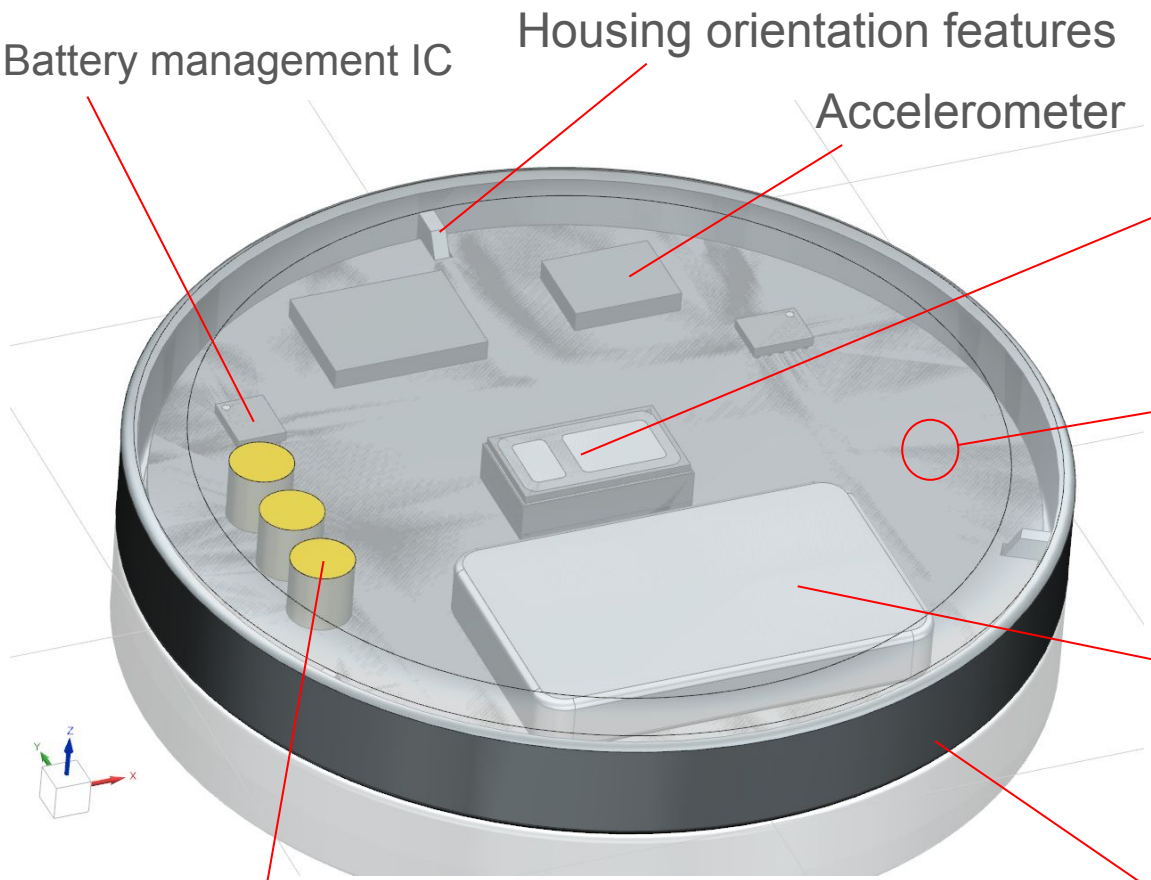
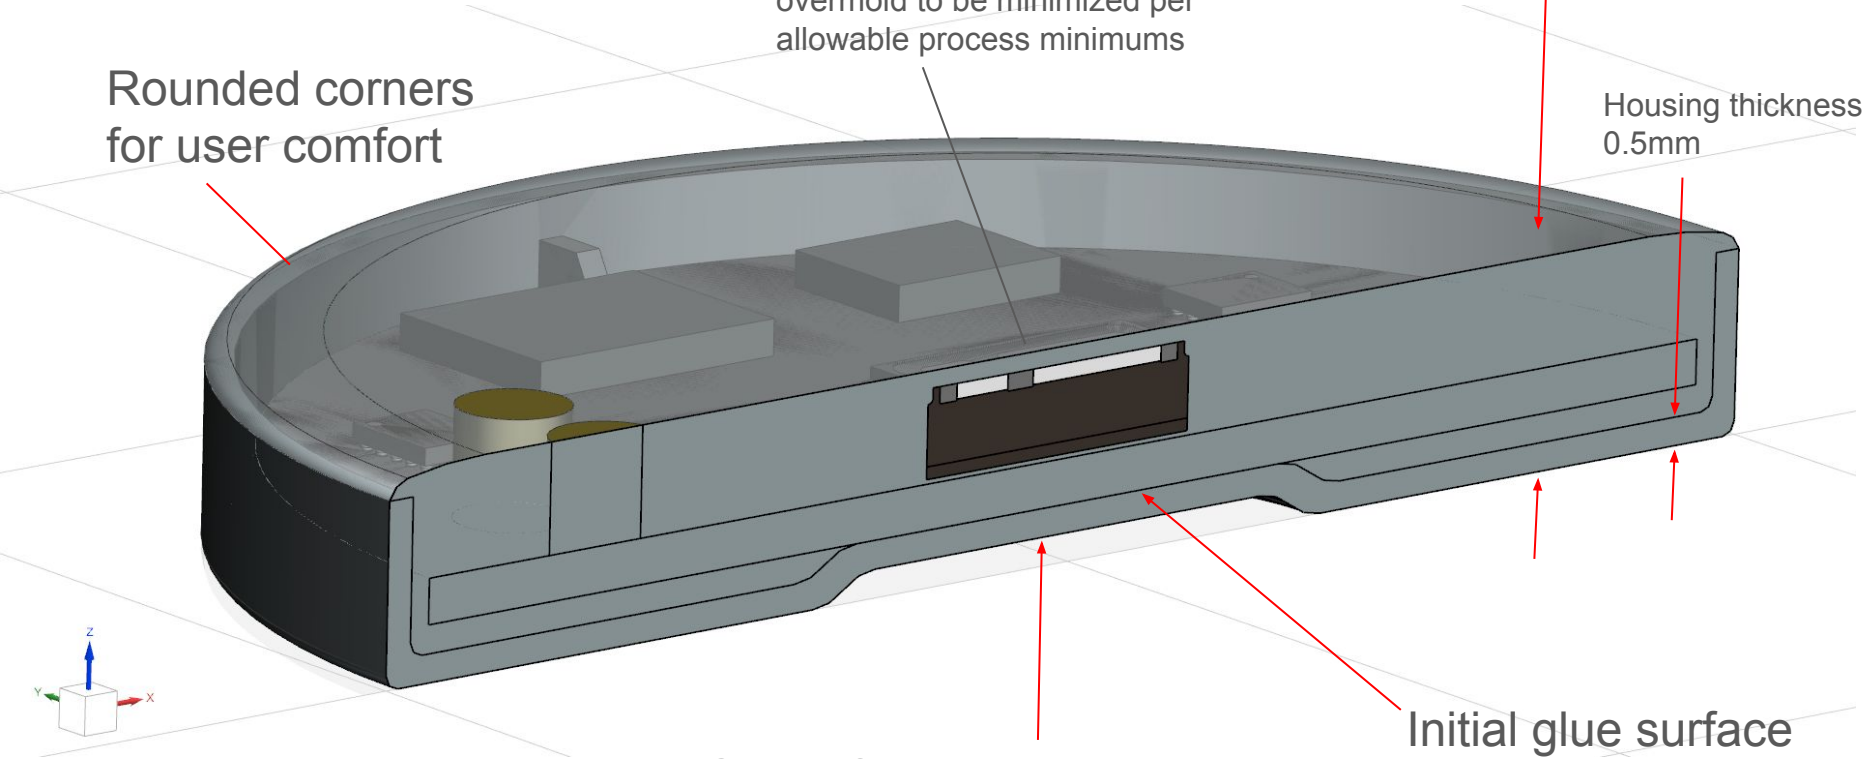
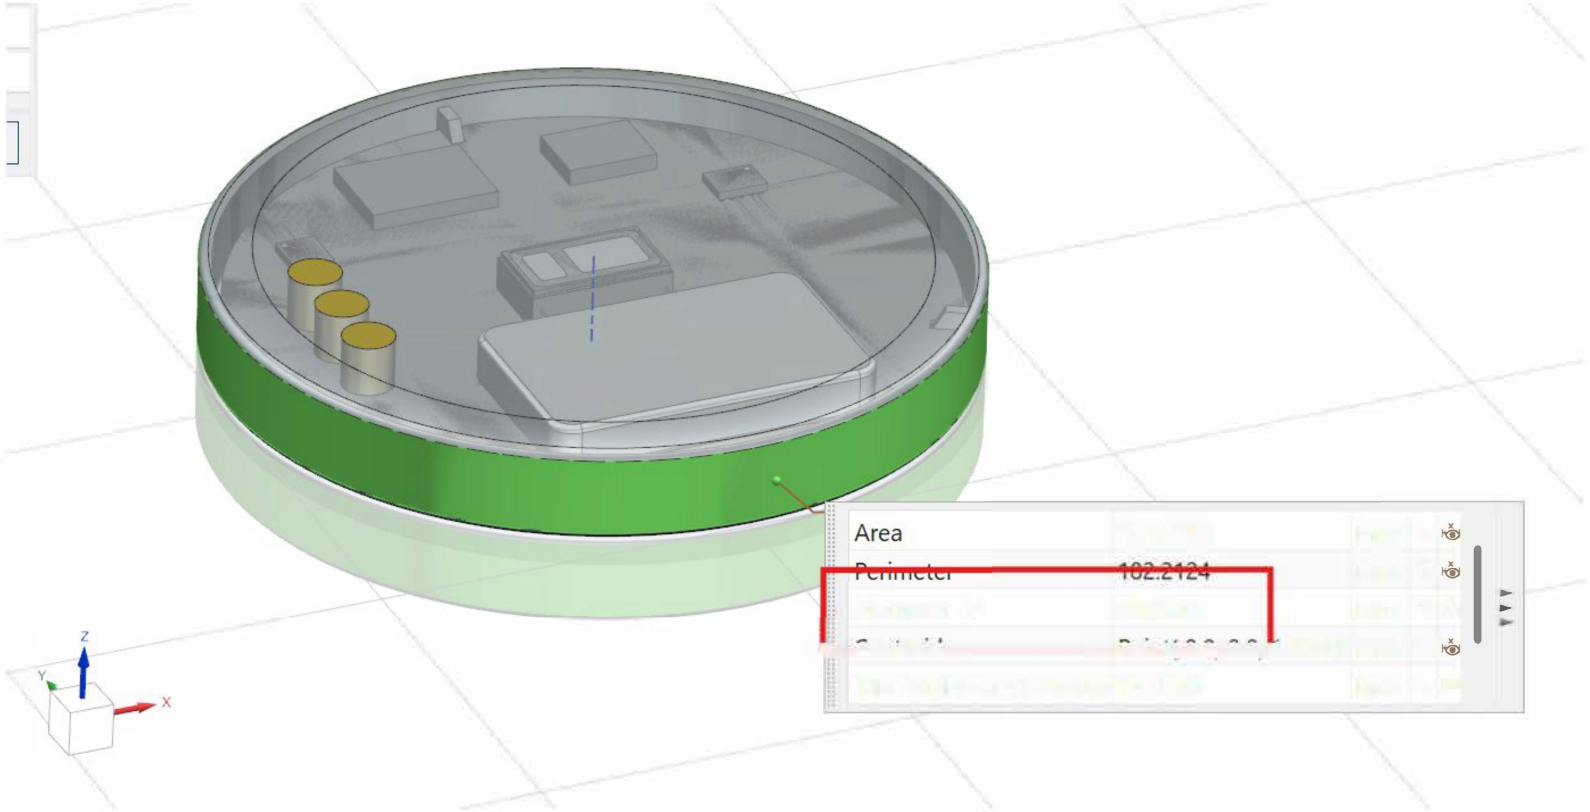

Battery management IC
Housing orientation features
Accelerometer
MAX30102EFD+T
SENSOR - OXIMETER/HEART RATE I2C
Clear, biocompatible (ISO 10993-5,-10) TPU overmold
Waterproofing, dust proofing
(Or black, with clear second shot for HR sensor)
Battery 3.6V
Biocompatible PC injection molded
Charging contacts, possible magnetic components for alignment with custom charge cable

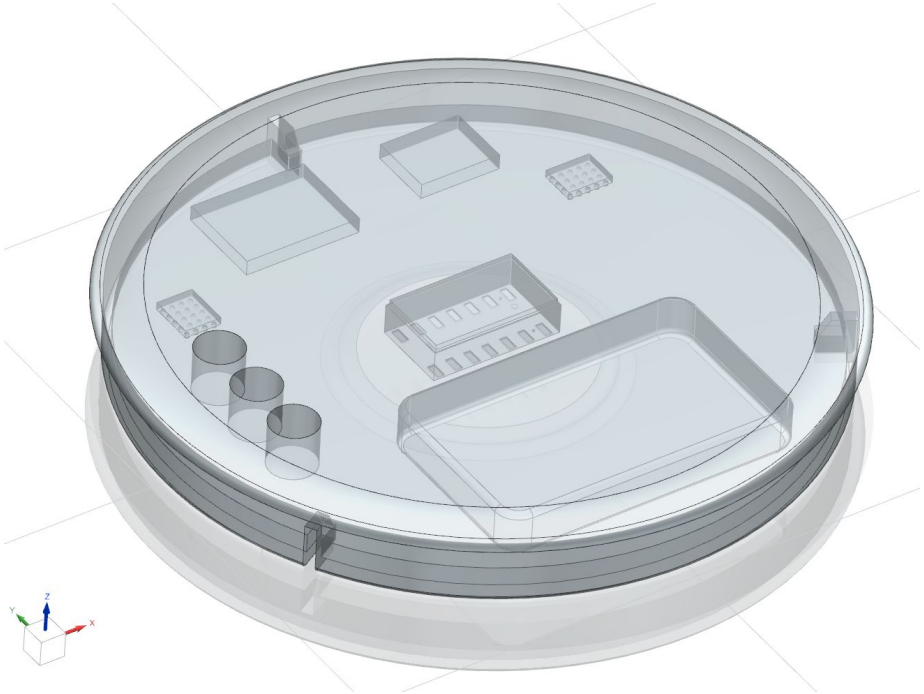
Cross sectional view



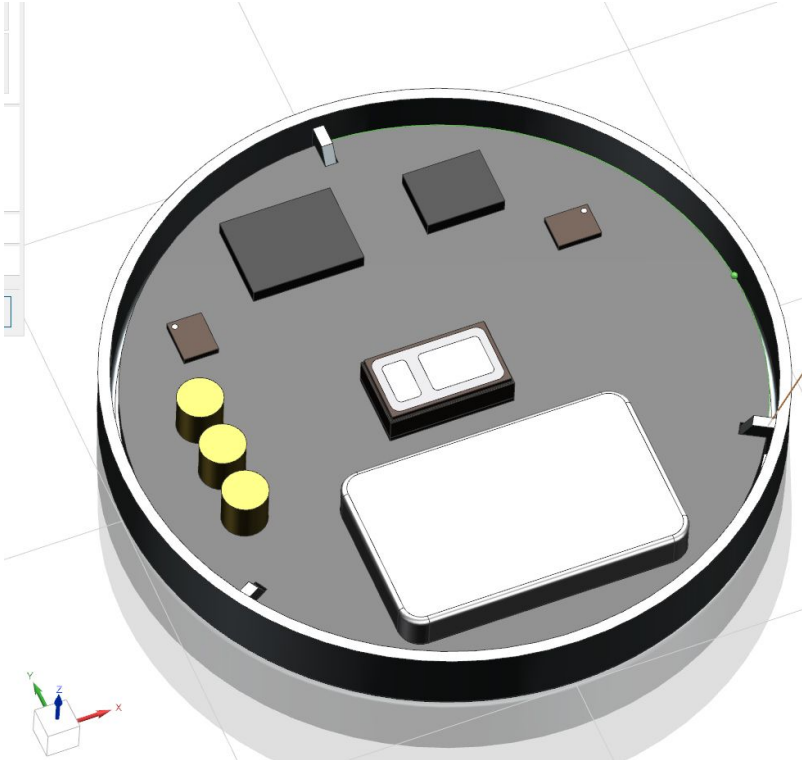

Area
Perimeter
182.2124
Z
Y
X

Overmold volume TPU

(Shown as separate component)



PCB



~~Length~~	~~27.9361~~	mm
Diameter ▼	27.2500	mm
Arc Center	Point(0.0, 0.0, 1.8000)	mm
Curve Start	Point(11.9467, -6.5510, 1.8000)	mm
Curve End	Point(0.3000, 13.6217, 1.8000)	mm
Min Radius of Curvature	13.6250	mm

Black FR4
0.80-1.60mm thickness (TBD)