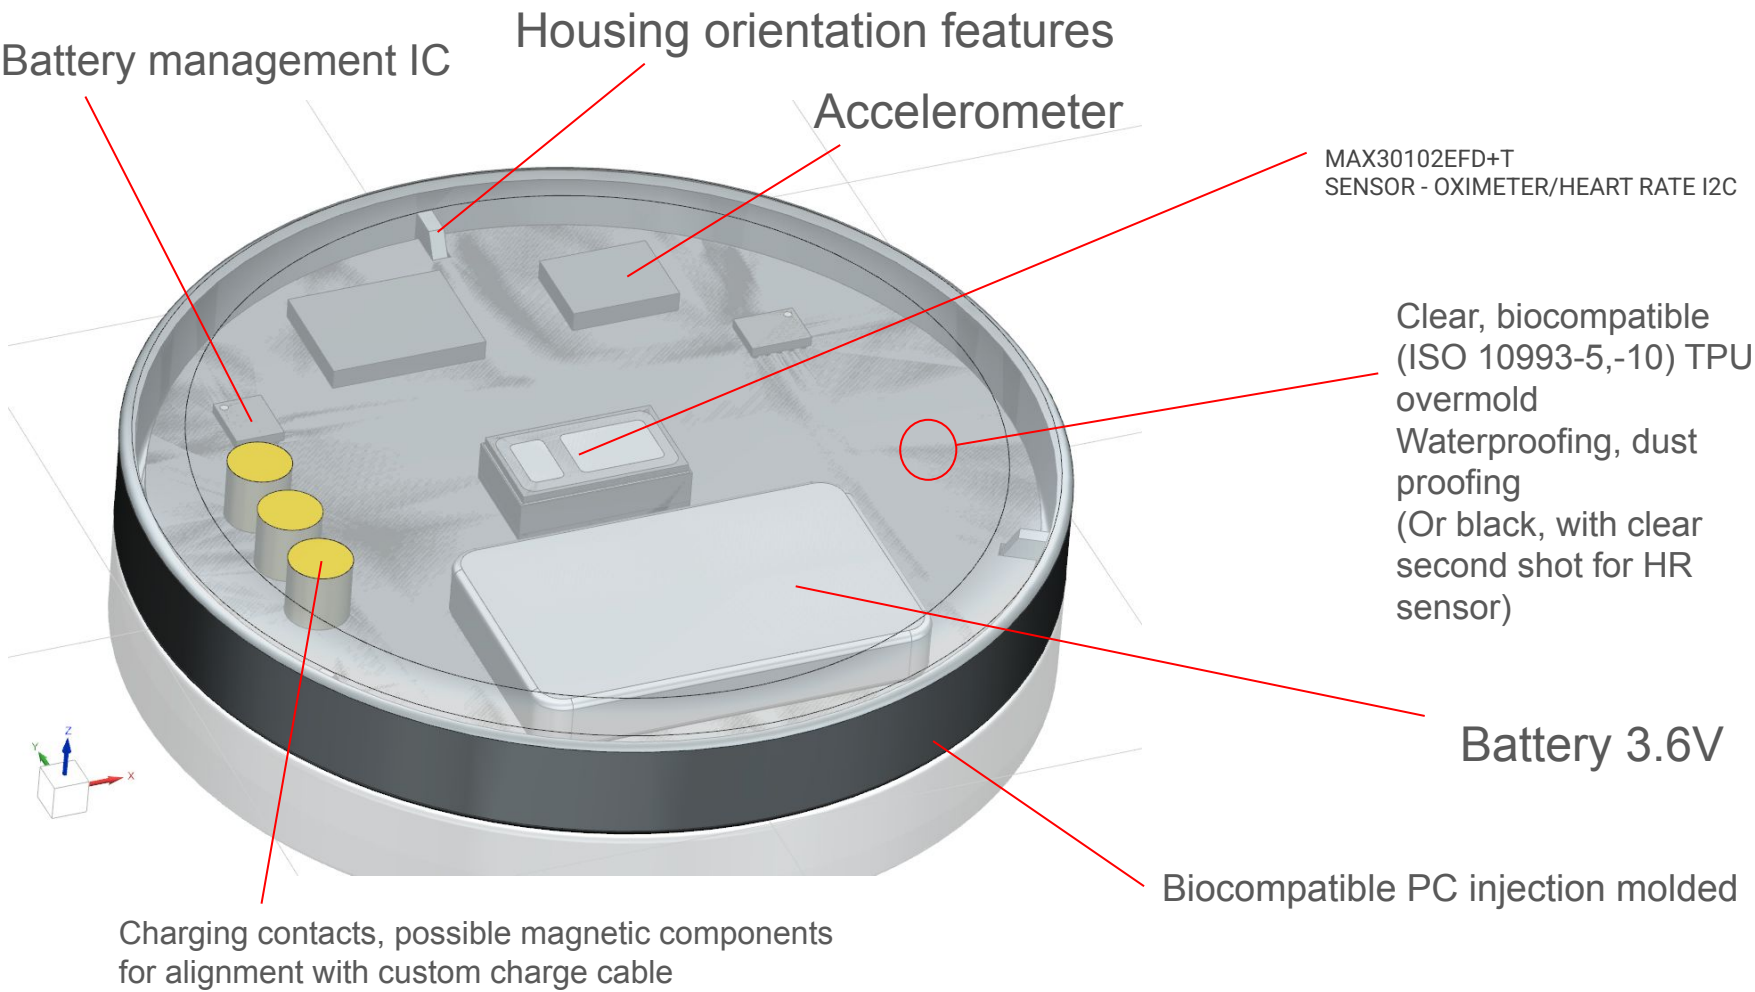
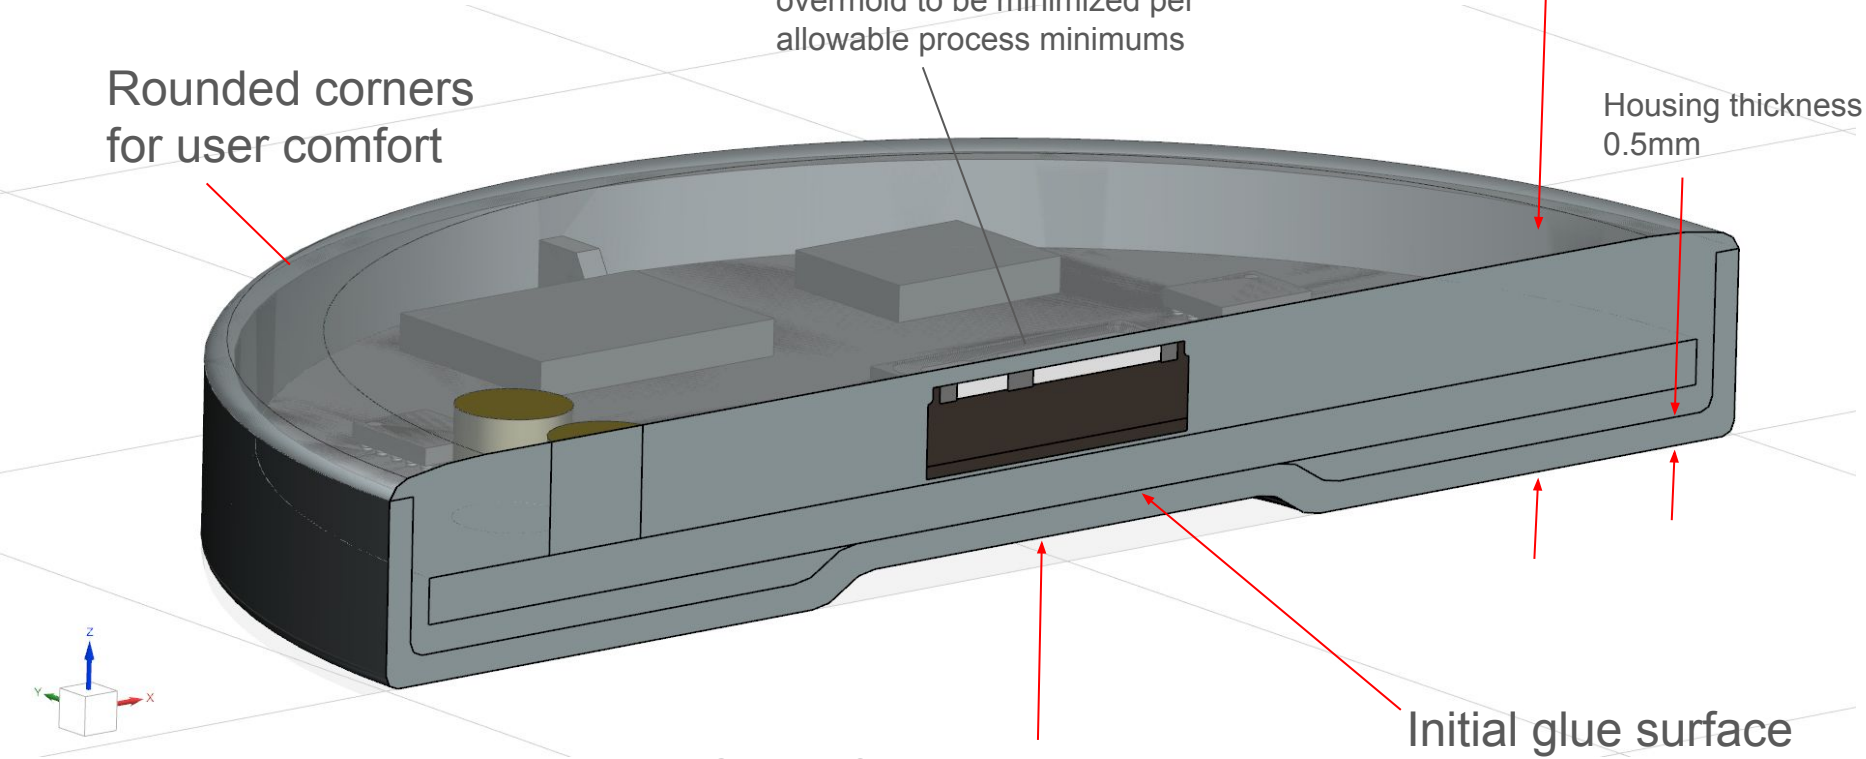
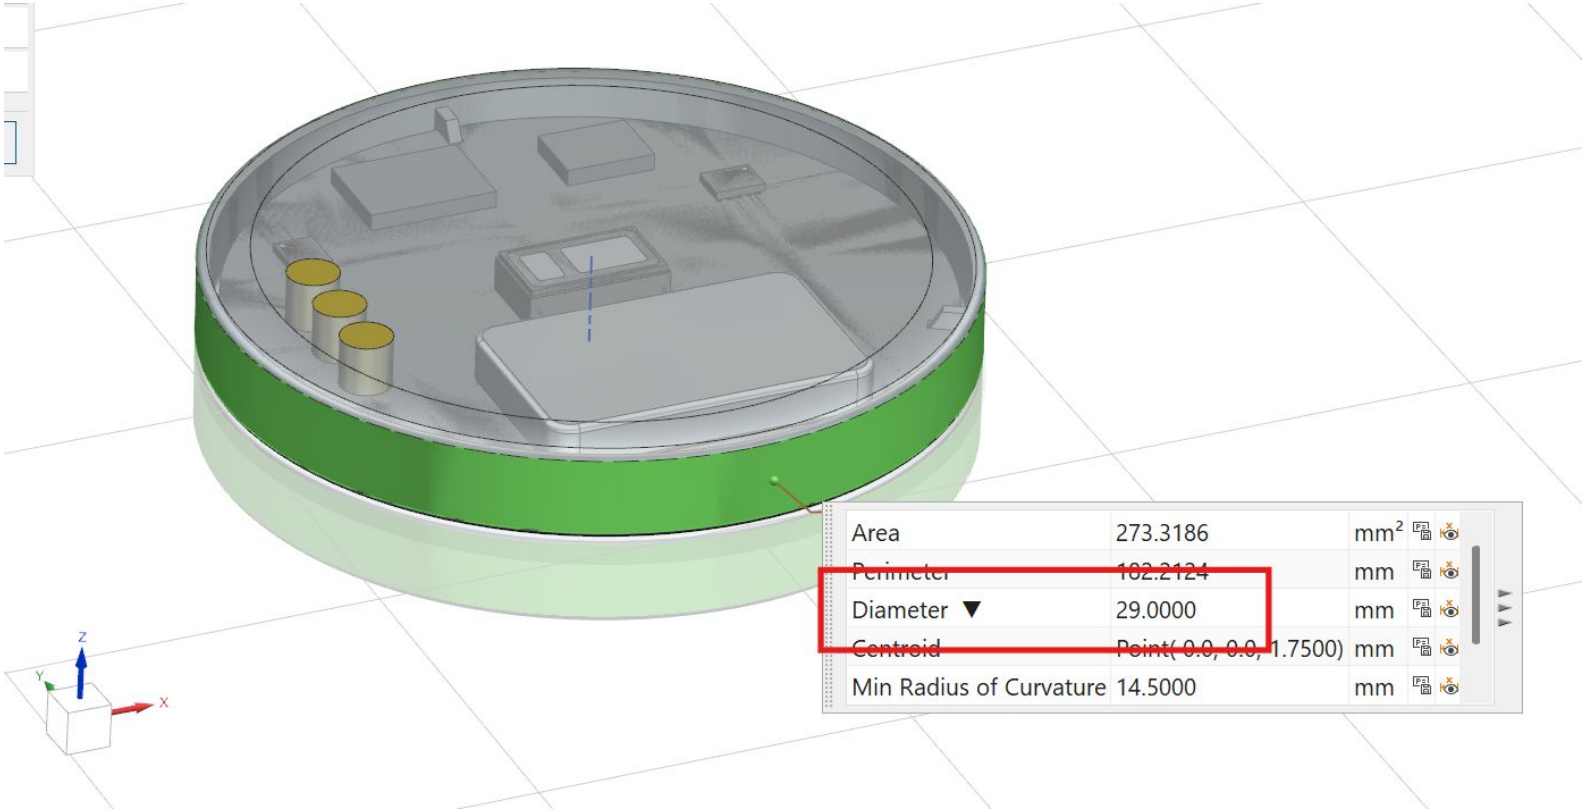

Battery management IC
Housing orientation features
Accelerometer
MAX30102EFD+T
SENSOR - OXIMETER/HEART RATE I2C
Clear, biocompatible (ISO 10993-5,-10) TPU overmold
Waterproofing, dust proofing
(Or black, with clear second shot for HR sensor)
Battery 3.6V
Biocompatible PC injection molded
Charging contacts, possible magnetic components for alignment with custom charge cable

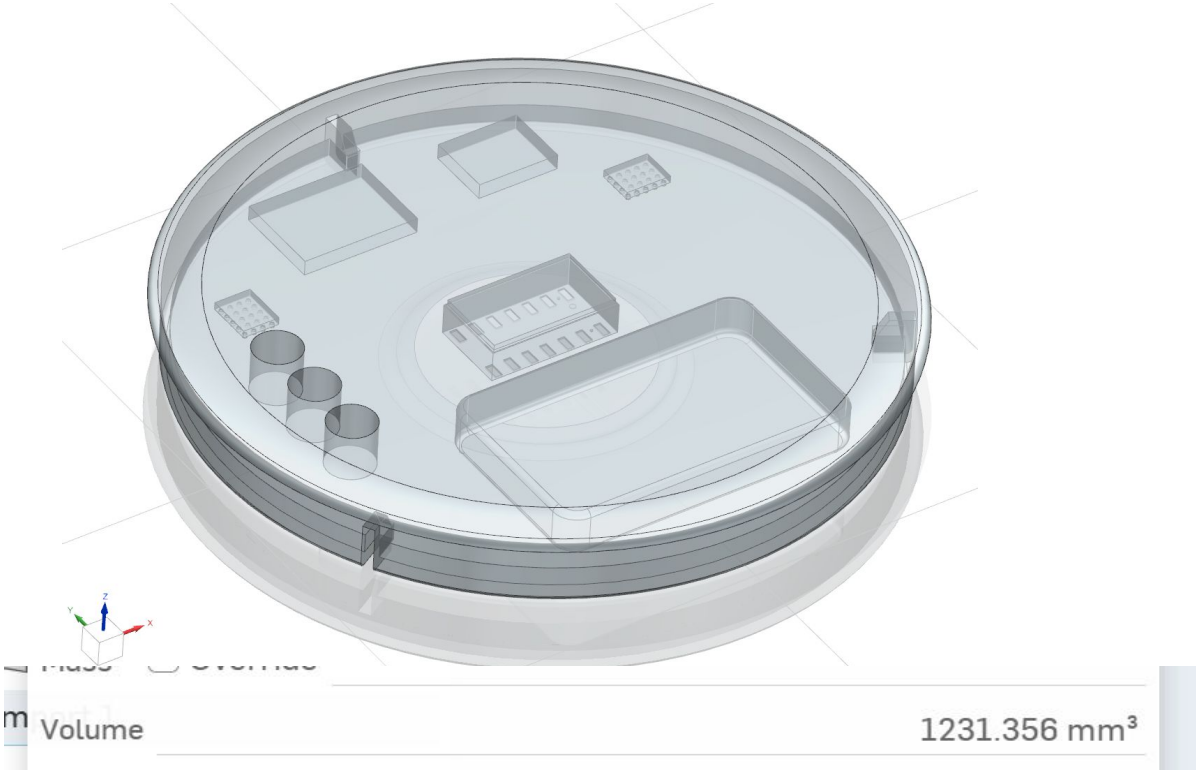
Cross sectional view



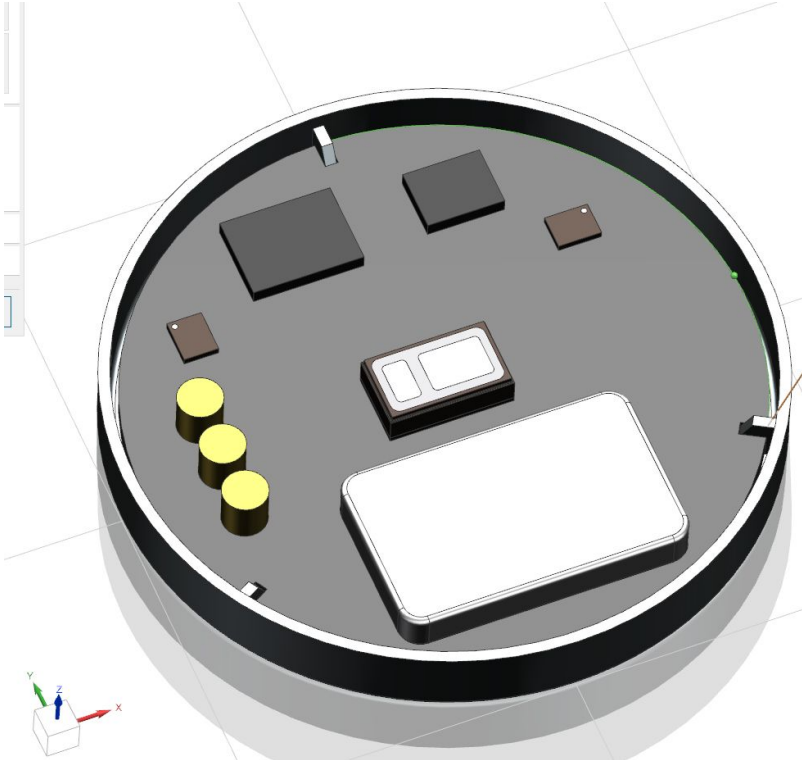

Z
Y
X
Area 273.3186 mm²
Perimeter 102.2124 mm
Diameter ▼ 29.0000 mm
Centroid Point(0.0, 0.0, 1.7500) mm
Min Radius of Curvature 14.5000 mm

Overmold volume TPU

(Shown as separate component)



PCB



~~Length~~	~~27.9361~~	mm
Diameter ▼	27.2500	mm
Arc Center	Point(0.0, 0.0, 1.8000)	mm
Curve Start	Point(11.9467, -6.5510, 1.8000)	mm
Curve End	Point(0.3000, 13.6217, 1.8000)	mm
Min Radius of Curvature	13.6250	mm

Black FR4
0.80-1.60mm thickness (TBD)