SUBTITLE DISPLAY

Proof of Concept


Proposed by eSpark



Introduction

This report provides a solution for displaying subtitles on screen. Data is sent via Bluetooth from mobile application to a server, which then forwards it to individual devices via Wi-Fi that display it on a screen.

Block Diagram

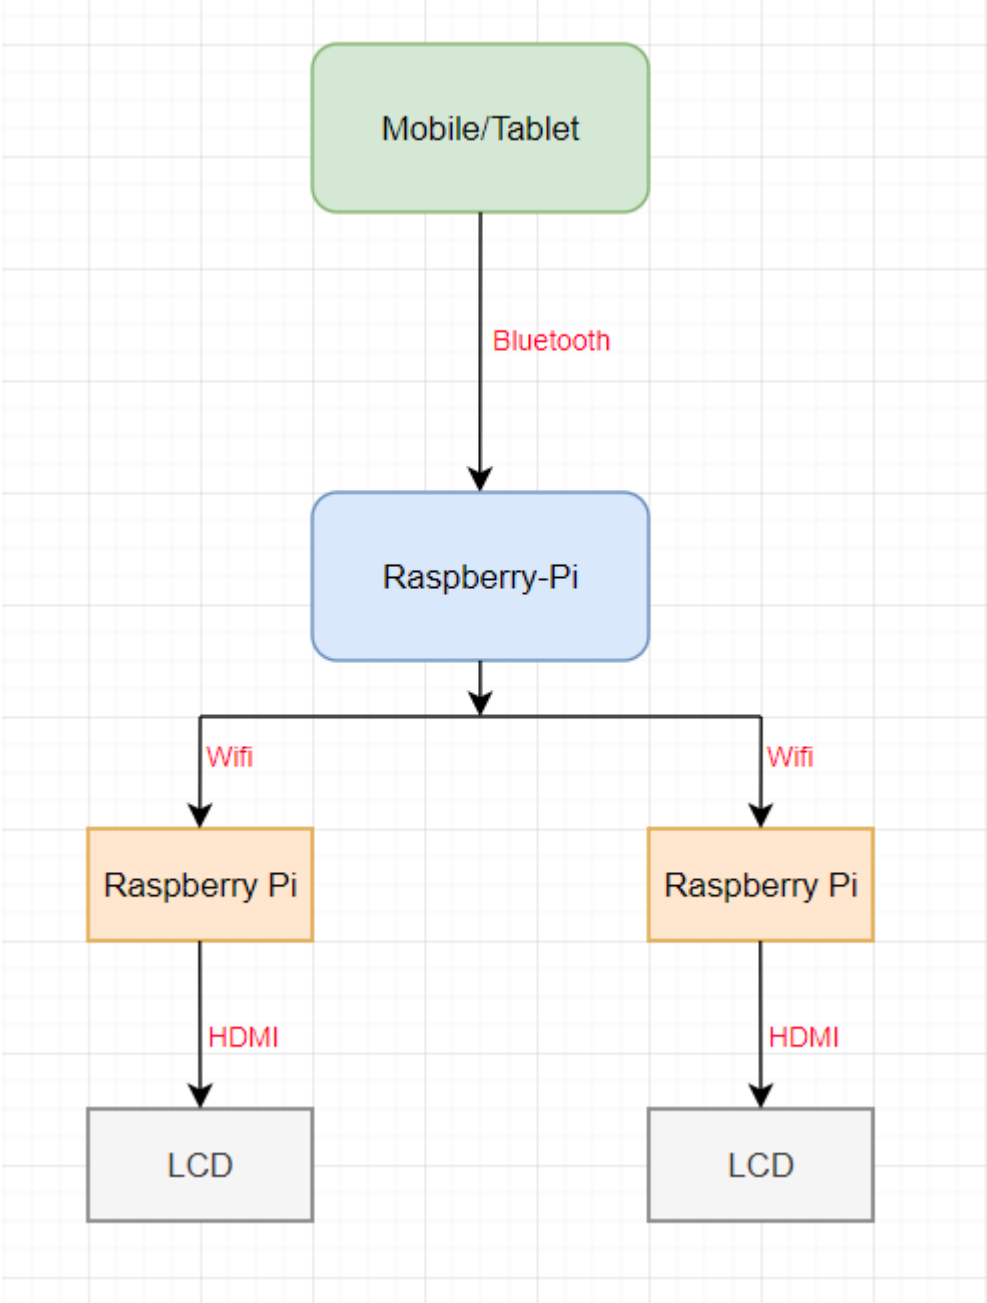

Working Methodology

- After having a connection between mobile/tablet and server via Bluetooth, user will send data that needs to be displayed.
- The server receives data and simultaneously forwards it to the client devices via Wi-Fi.
- Client device will display the subtitles on LCD.

Component Selection

- **Development Board**

For Development board, we have a lot of options from different companies. Most famous ones available are

1. Jetson Nano
2. Raspberry Pi
3. Orange Pi

Among all, Raspberry Pi is most suitable because of community support available online. It has a strong Processor that is suitable for the application.

- **LCD**

Selected by Client

Cost

3 * Raspberry Pi (Server = 1, Client = 2)
2 * LCD

Component	Quantity	Unit Price ($)	Shipping ($)	Total ($)
Raspberry Pi	3	72	78	294
LCD	2	120	50	290
Total Cost				**584**