
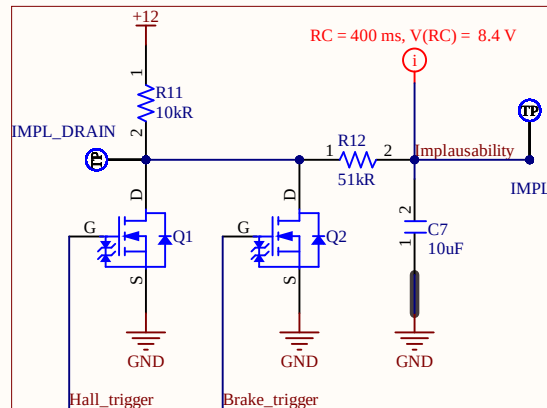


Red: Untreated supply
Cyan: External signal
Pink: Treated supply
Purple: Shutdown chain



▲ Voltage at **RST_Ref** is set so in approximately 14 seconds, triggers the signal **SC_close** to 0 V.

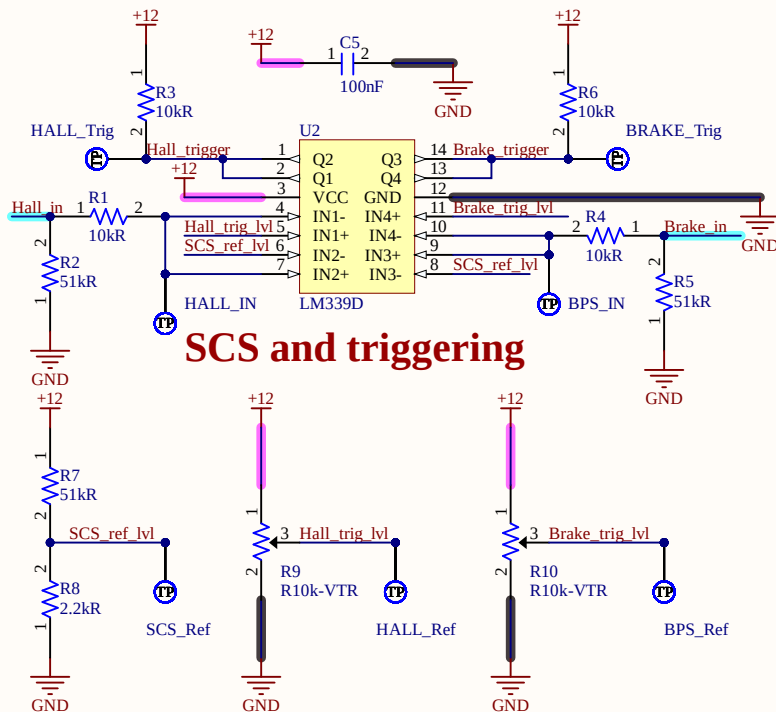

▲ T 11.6.2 - Max. 500ms implausibility until opening the shutdown circuit

Delayed NAND

Shutdown Circuit

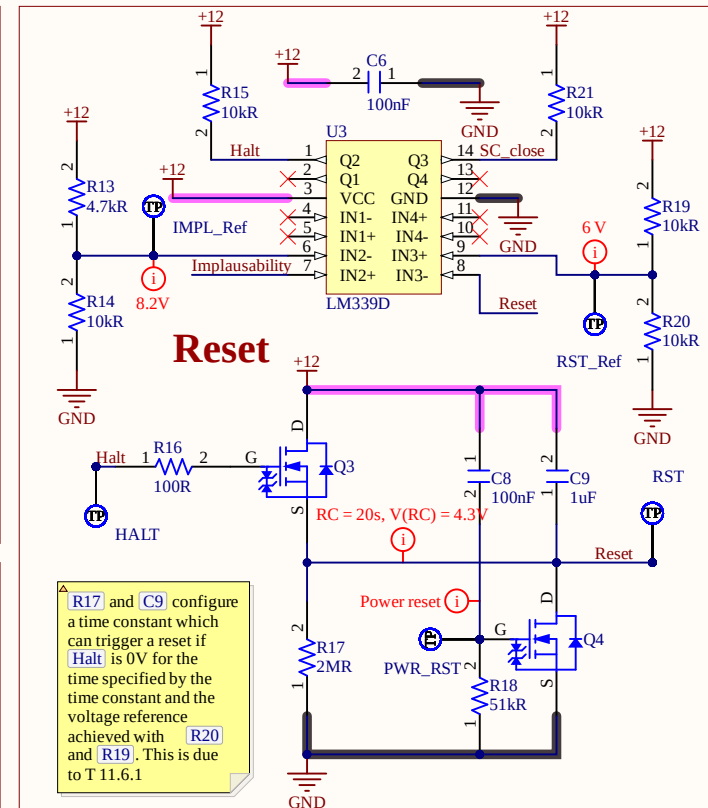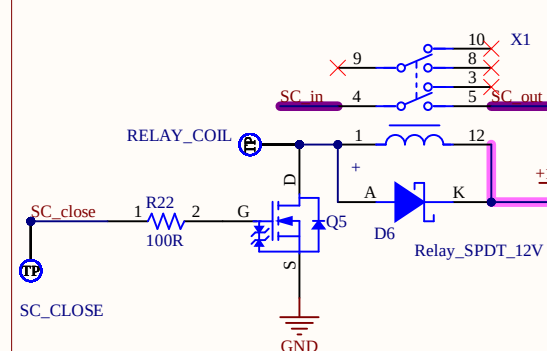

▲ **R17** and **C9** configure a time constant which can trigger a reset if **Halt** is 0V for the time specified by the time constant and the voltage reference achieved with **R20** and **R19**. This is due to T 11.6.1

▲ The BSPD can handle 0-5V inputs. If one of the sensors' signals is 0V, it will cause the Shutdown Circuit to be open because they both are SCS. the trigger level for each signal is configured with **R9** and **R10**.

Company: e-Tech Racing		e-techracing.es		 FORMULA STUDENT TEAM
Project: BSPD		Variant: [No Variations]		
Size: -	Page Contents: BSPD.SchDoc		Version: 3.0	Department: PCBs
Author: Guillem Ropero		guillemropero@gmail.com		
Checked by: David Redondo		Date: 11/02/2025		Sheet 1 of 1

