




Cyan: External signal  
Orange: High Voltage  
Red: Untreated supply  
Pink: Treated supply

This PCB is intended to be used inside a TS enclosure, and monitors the TS voltage. [Inv\_Red\_ON] is a signal to be input to TSAL Control so it can control the red light. It is manufactured and installed twice, one in each inverter housing for the 2023 car.

Company: e-Tech Racing Car79 e-techracing.es		
Project: TSAL_Inverters	Variant: [No Variations]	
Size: -	Page Contents: TSAL_Inverters.SchDoc	Version: 1.0
Author: David Redondo dredondovinolo@gmail.com		Department: Powertrain
Checked by: David Redondo UPC EEBE BARCELONA		Sheet 1 of 1
		Date: 14/04/2023

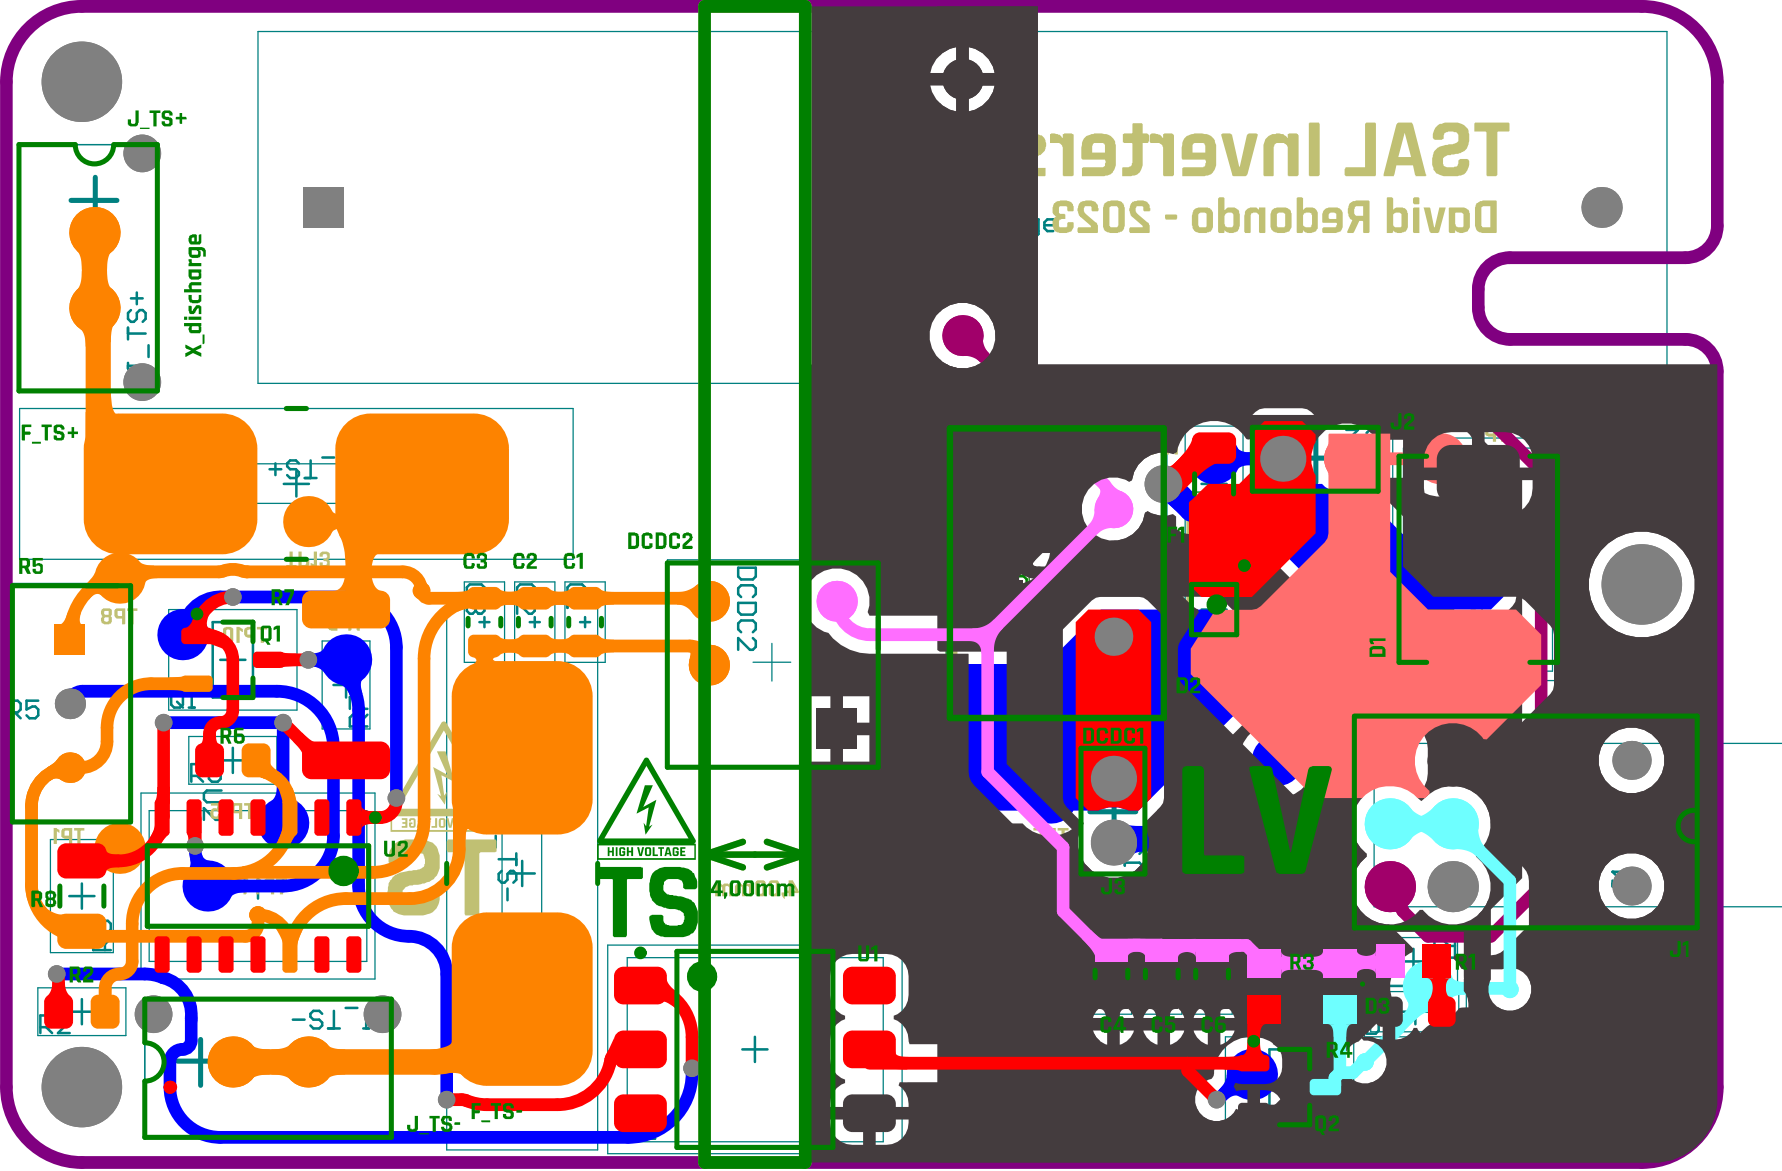

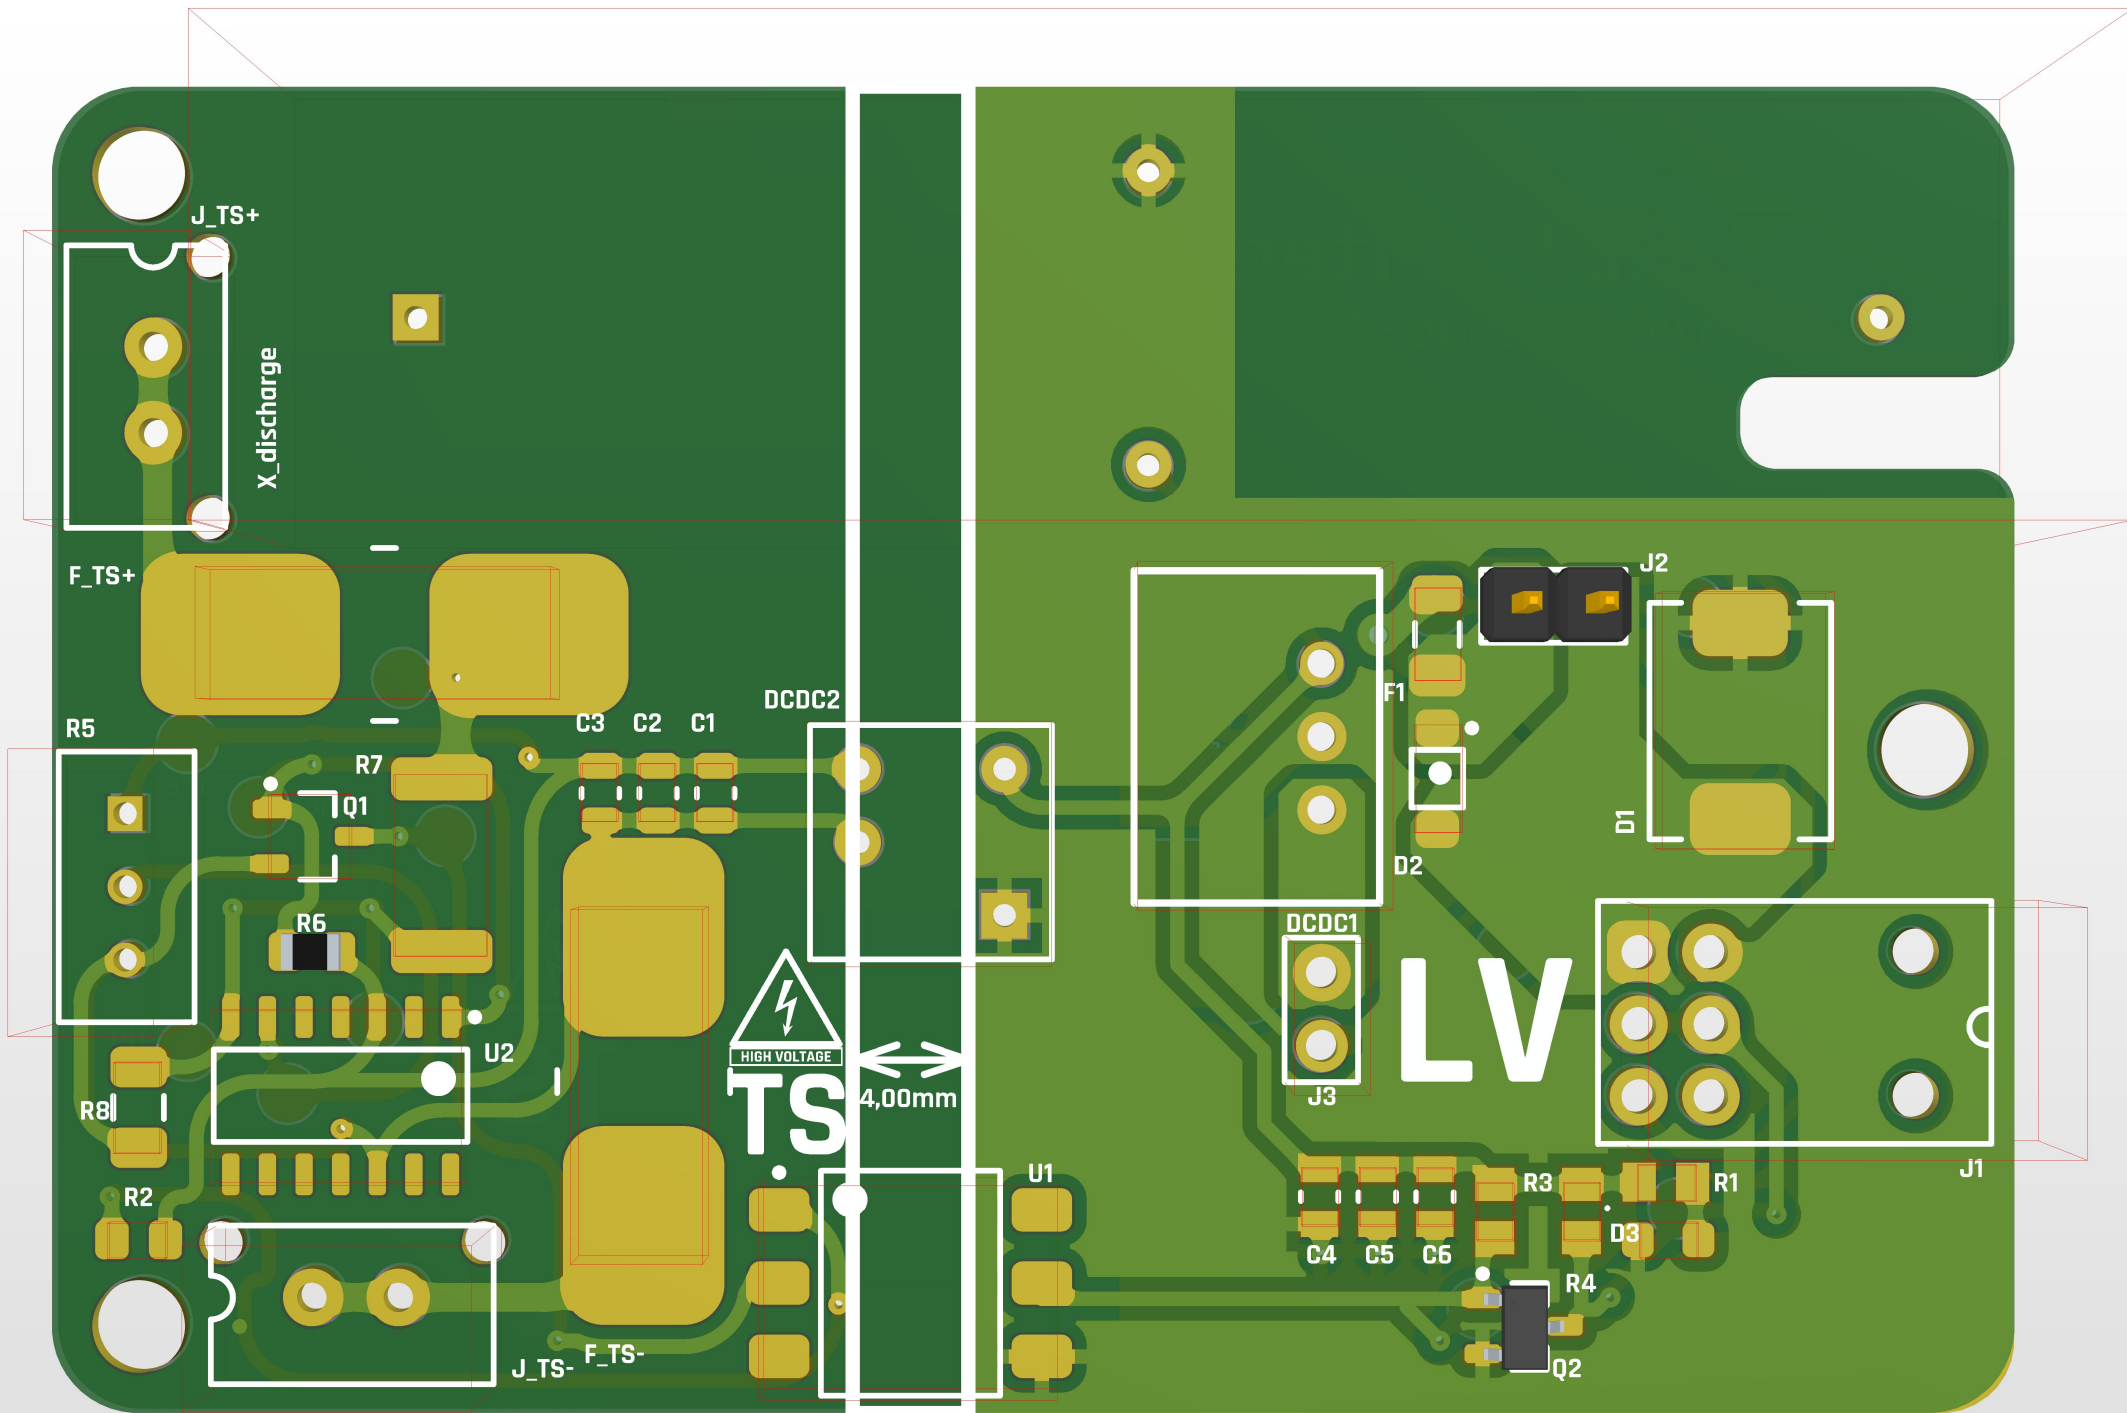

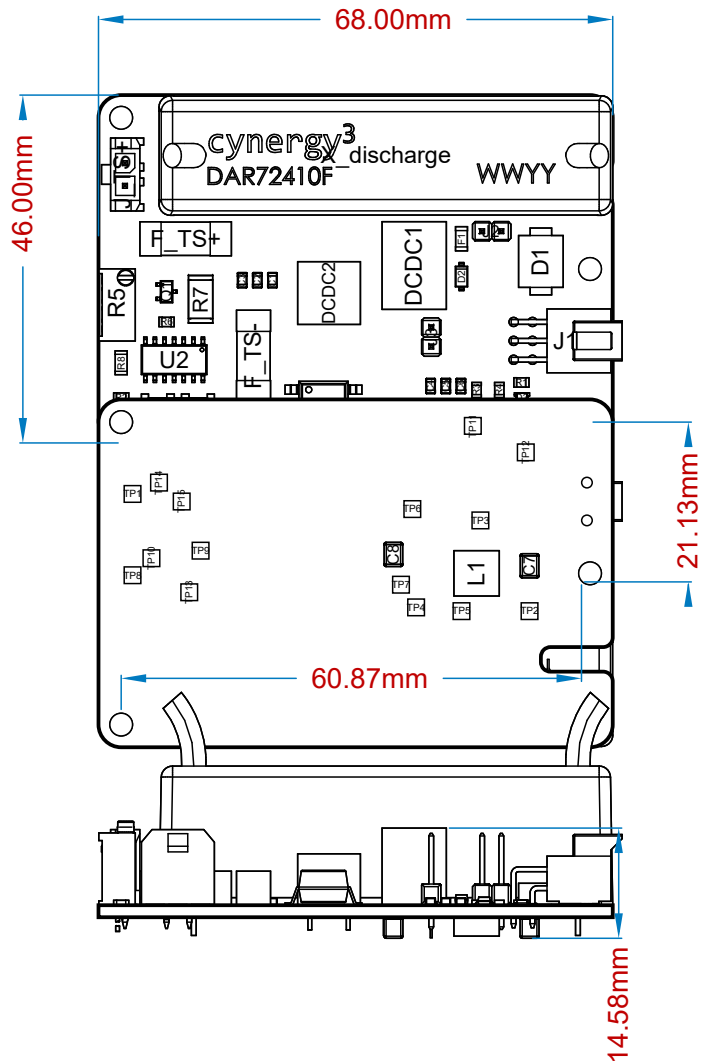

Designator	Name	Quantity
C1, C4	885012207092	2
C2, C5	885012207098	2
C3, C6	885012207103	2
C7, C8	GRJ32ER71H106KE11L	2
D1	824551301	1
D2	MBR0530	1
D3	150080VS75000	1
DCDC1	173951236	1
DCDC2	RNM-1205S/P	1
F1	0437001.WRA	1
F_TS-, F_TS+	485001	2
J1	J NanoFit 2x3	1
J2, J3	61300211121	2
J_TS-, J_TS+	436500215	2
L1	CDC5D23BNP-470KC	1
Q1, Q2	SQ2318BES-T1_GE3	2
R1, R2	CR0805-JW-102ELF	2
R3, R4, R6	CR0805-JW-103ELF	3
R5	3296W-1-103LF	1
R7	R2M-2512FTK	1
R8	CRCW120610K0FKEA	1
U1	4N35	1
U2	LM339D	1
X_discharge	DBR72410FU	1

