3.5 英寸主板
CIB-IELK-TW01
产品规格书

3.5" Motherboard
CIB-IELK-TW01
Product Specification

-

Intel® Elkhart Lake J6412（2.00 GHz）

1x DDR4 2666/3200 MHz Max to 32GB


销售型号 Sales Model
CIB-IELK-TW01

Industrial Motherboard

Last updated: June_2025

3.5 英寸主板 / 3.5" Motherboard
CIB-IELK-TW01

外观 Appearance_a

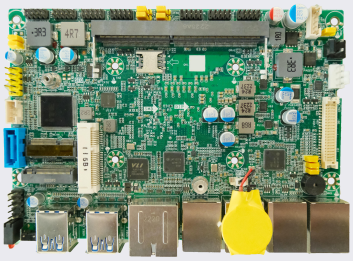


外观 Appearance_b




特性 Feature

- Intel® Elkhart Lake J6412（2.00 GHz）
- 1x DDR4 2666/3200MHz Max to 32GB
- 1x HDMI and DP++ display
- 1x LVDS/eDP co-lay
- 4x RJ45, 2x COM, 1x SATA 3.0
- 4x USB 3.2 (Gen1)
- 1x Vertical USB 3.2 Gen1 Type-A
- 2x USB 2.0
- 1x 8-bit GPIO
- 1x OS Recovery
- 146 x 102mm

细节 Detail_a

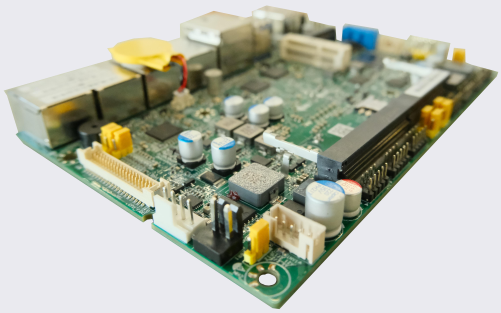

细节 Detail_b

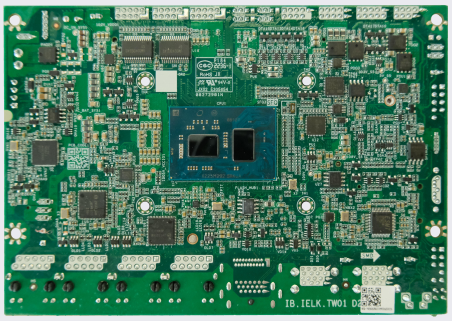


*展示内容仅作示意，实物效果（包括但不限于外观、颜色、尺寸）和展示内容（背景、配图、装饰元素）等可能略有差异，请以实际出货为准。

*The content is for illustration purposes only. There may be slight differences in the physical effects (including but not limited to appearance, color, size) and above content (background, illustrations, decorative elements). Please refer to the actual shipment for accuracy.

Last updated: June_2025

3.5 英寸主板 / 3.5" Motherboard
CIB-IELK-TW01

六视图 Dimension

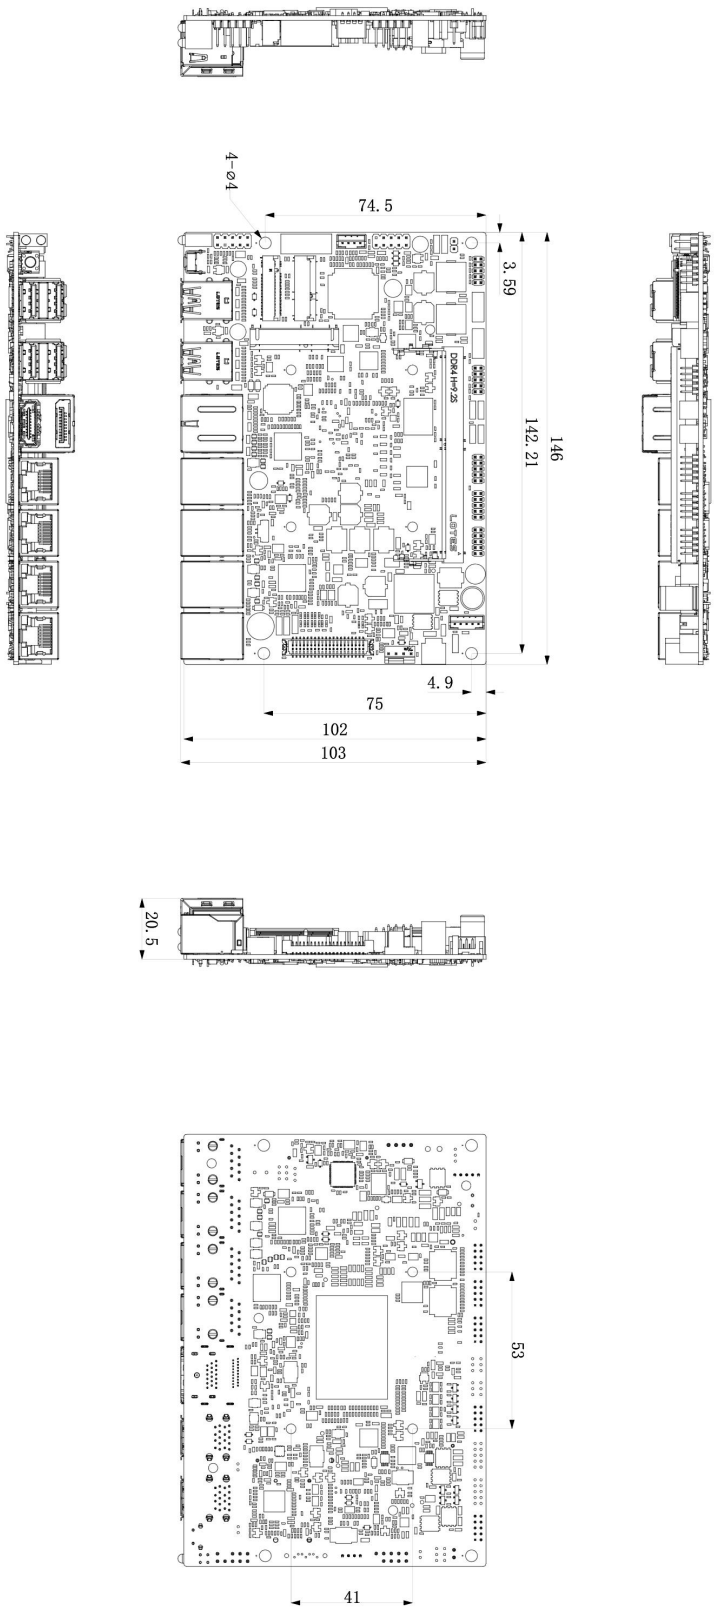

Last updated: June_2025

3.5 英寸主板 / 3.5" Motherboard
CIB-IELK-TW01

规格 Specification

系统 System	
处理器 Processor	Intel® Elkhart Lake J6412 (2.00 GHz)
内存 Memory	1x DDR4 2666/3200MHz SO-DIMM, Up to 32GB
BIOS	AMI 128Mbit SPI Flash
图形 Graphic	Intel® Integrated Graphics
操作系统 OS	Windows 10; Linux
看门狗定时器 Watchdog Timer	System Reset, Programmable 255 levels timer interval, From 1~255 sec/min
后部接口 Rear I/O	
网口 Ethernet	4x RJ45: LAN1~4: Intel® I210-AT GbE (10/100/1000 Mbps)
显示 Display	1x HDMI: Up to 4096 x 2304@30Hz 1x DP++: Up to 4096 x 2304@60Hz
USB	4x USB3.2（Gen1）
LED	1x Power LED 1x HDD LED
OS Recovery	1x OS Recovery Button
内部接口 Internal I/O	
扩展接口 Expansion Slot	1x Full-size Mini-PCIe(PCIe x1 & USB 2.0) 1x M.2 2242 M Key for SSD (SATA 3.0) 1x M.2 2230 E Key (PCIe x1+USB 2.0)
显示Display	1x LVDS, Up to 1920 x 1200, co-lay eDP
COM	2x COM（RS232/422/485 Default RS232） 2x COM（RS232）
CAN	2x CAN 2.0b
USB	2x USB 2.0
SATA	1x SATA 3.0
GPIO	1x 8bit GPIO Default 4in/4out
Audio	1x Audio(Line-out&Mic-in)
SIM	1x Nano SIM
Fan	1x CPU Smart Fan
Front Panel	1x Front Panel
TPM	fTPM2.0
UPS	NA

3.5 英寸主板 / 3.5" Motherboard
CIB-IELK-TW01

规格 Specification

电源 Power	
电源输入 Power Input	12~24V DC
机构 Mechanical	
尺寸 Dimension	146 x 102mm, 3.5 英寸
环境 Environmental	
操作温度 Operating Temp.	0℃ ~ 60℃
存储温度 Storage Temp.	-40℃ ~ 85℃
操作湿度 Operating Relative Humidity	60℃ 95%RH
存储湿度 Storage Relative Humidity	60℃ 95%RH, Non-Condensing
随机振动 Random Vibration	5~500Hz, 3.5Grms Operation
正弦振动 Sine Vibration	5~500Hz, 2G Non-Operation
机械冲击 Shock	Operation: 10G@11ms, Non-Operation: 20G@11ms
认证Certification	
安规认证 Safety Certification	可搭配整机进行 CCC, CE, FCC, RoHS 等相关认证
主要销售型号 Sales Model	
销售型号 Sales Model	CIB-IELK-TW01

注意：“环境”参数通过搭配 IPC 整机测试后得出。
Notice: The data of "Environmental" is obtained through testing with the entire IPC machine.

Last updated: June_2025

本规格书所展示型号有两类：研发型号和销售型号，交易前请确认实际交易的产品型号与生产规格。
由于持续的产品升级造成的规格变更，恕不另行通知。

©苏州源控电子科技有限公司版权所有 2025年

The models shown in this specification are development models, and sales models. Please vertify production specifications before quoting. Product specifications are subject to change without prior notice due to continuous product upgrades.

© Suzhou Yuankong Electronics Co., Ltd. 2025

intel partner Titanium

获取更多信息与技术支持
For more information and support
Tel: 400-100-5558
Web: www.spestech.com

铸就智能核心驱动力
LEAPING WITH INTELLIGENCE