



Submittal Data Sheet

19.2 SEER2 HP R32, 2 Ton

DH9VSA241C

STANDARD FEATURES

- Daikin variable-speed swing compressor
- Strong heating capacity (Met the requirements of the U.S. Department of Energy (DOE) Residential Cold Climate Heat Pump Challenge)
- Suitable for high-ambient regions
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Daikin control algorithmic logic
- Compatible with AHRI 1380 Demand Response functionality
- Compatible with the ONE Ecosystem
- Intelligent Defrost Mode
- In communicating mode, only two low-voltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Daikin Inside intelligence for diagnostics
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 47dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- Advanced water-shedding drain pan
- 3-Stage Heater Kit Available as a Field Installed Option
- Hot gas base pan eliminates extra drain pan heater down to 5°F
- Hot start technology
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- 500-hour salt-spray tested
- High corrosion (ZAM®)
- unpainted steel bottom frame and legs
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

NOTES

- R32 Outdoor



Submittal Data Sheet

19.2 SEER2 HP R32, 2 Ton

DH9VSA241C

PERFORMANCE COMBINATION (HSVTC)

* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH9VSA241C	Outdoor Unit Name:	19.2 SEER2 HP R32, 2 Ton
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):	24,000	* Rated Heating Capacity (Btu/hr):	24,000
* EER:		* EER2:	12.20
* SEER:		* SEER2:	21.00
* HSPF:		* HSPF2:	10.0
* Heating COP:	4.2		

OUTDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Min. Circuit Amps MCA (A):	17.4	Suction Valve Connection Size (inch):	7/8
Max Overcurrent Protection (MOP) (A):	20	Liquid Valve Connection Size (inch):	3/8
Fan/Compressor Drive Input:	8	Sound Power (High) (dBA):	71
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	0 - 115
Holding Refrigerant Charge (ozs):	162	Heating Operation Range (°F DB):	-10 - 70
Additional Charge (ounces/ft):		Max. Pipe Length (Vertical) (ft):	90
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	150	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	230	Gross Weight (lb):	265
Dimensions (HxWxD) (in):	56.3125 x 37 x 22.625		

Submittal Data Sheet 19.2 SEER2 HP R32, 2 Ton DH9VSA241C

DIMENSIONAL DRAWING

DIMENSIONS

MODEL	DIMENSIONS		
	W"	D"	H"
DH9VSA241CA*	37	12%	56 ⁷ / ₁₆
DH9VSA361CA*	37	12%	56 ⁷ / ₁₆

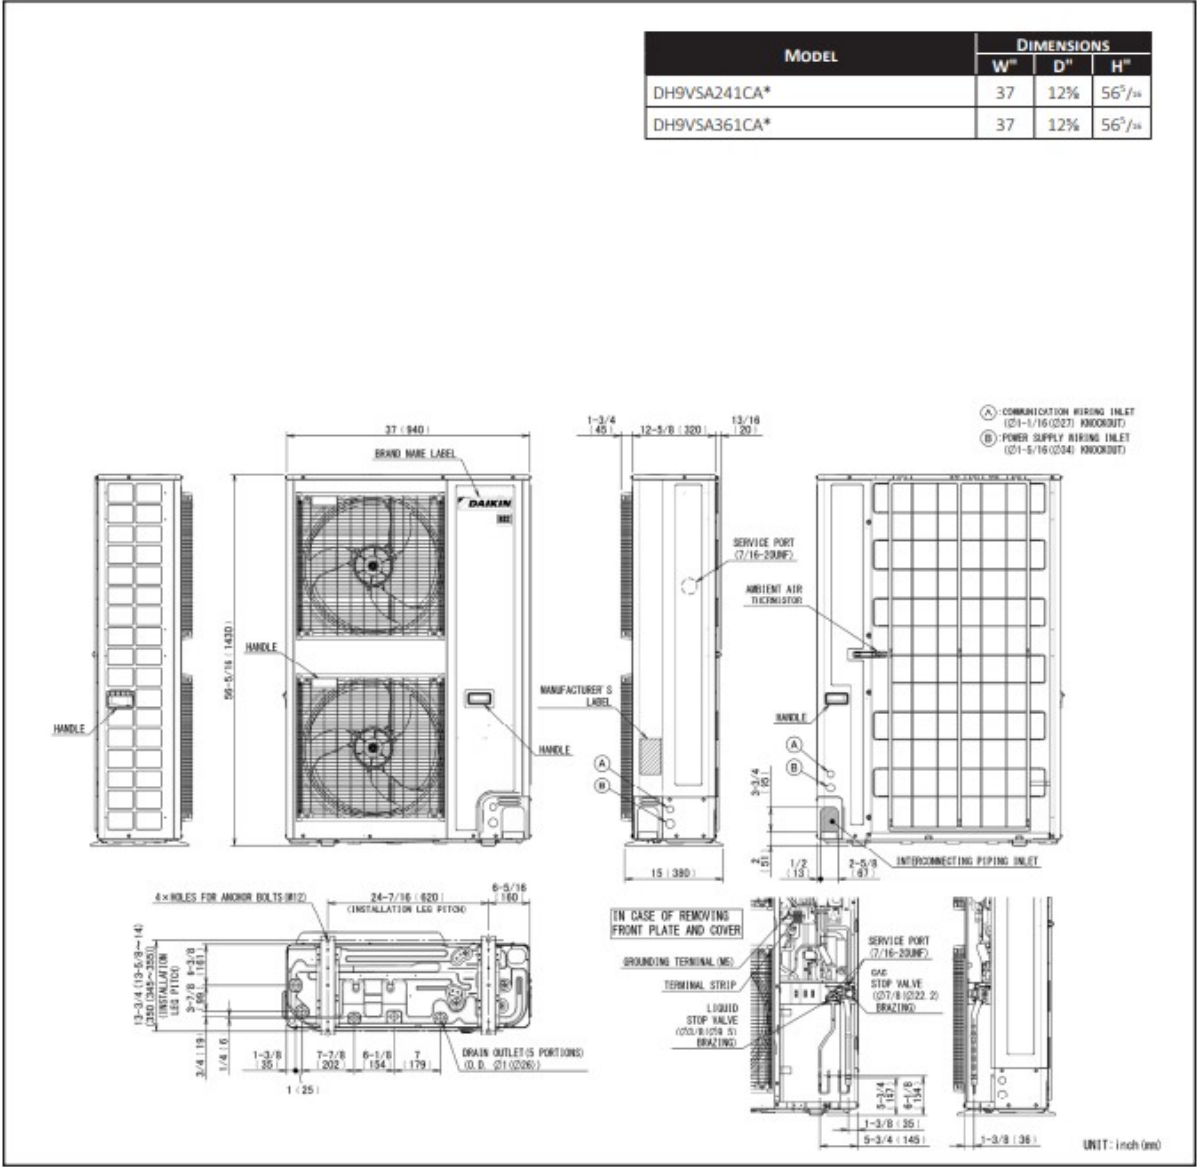



Submittal Data Sheet
19.2 SEER2 HP R32, 2 Ton
DH9VSA241C

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
0270R02063	Hail Guard Assembly	No
3K020967-2	Snow Protection Hood, Front	No
3P434587-5	Snow Protection Hood, Rear	No
3P434588-1	Snow Protection Hood, Side	No
DSEN-HAQA	Daikin One Home Air Monitor	No
DTA119A73	D24V Gateway supports R-32 AC/HP for all SD brands, integrating with any furnace	No
KEH3P648291	Drain Pan Heater	No
KPW5G112	Air Adjustment Grille/ Wind Baffle	No