



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, Communicating Gas Furnace, 60k BTU/h
DM80VC0604BN

STANDARD FEATURES

- Compatible with the Daikin One+ smart thermostat and other Daikin communicating equipment
- Heavy-duty stainless-steel dual-diameter, tubular heat exchanger
- Two-stage gas valve provides quiet, economical heating
- Durable Silicon Nitride igniter
- Quiet two-speed draft inducer
- Self-diagnostic control board with constant memory fault code history output to a dual 7-segment display
- Color-coded low-voltage terminals with provisions for electronic air cleaner and humidifier
- Efficient and quiet variable-speed airflow system gently ramps up or down according to heating or cooling demand
- Multiple continuous fan speed options offer quiet air circulation
- Auto-Comfort and enhanced dehumidification modes available
- California Low NOx emissions-compliant models available
- For installation in California's South Coast Air Quality Management District (SCAQMD) only: This furnace does not meet the SCAQMD Rule 1111 14 ng/J NOx emission limit, and thus is subject to a mitigation fee of up to \$450
- This furnace is not eligible for the SCAQMD Clean Air Furnace Rebate Program: www.CleanAirFurnaceRebate.com
- AHRI Certified; ETL Listed



CABINET FEATURES

- Multi-position installation: DM80VC: Upflow, horizontal left or right. DD80VC: Dedicated downflow
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) less than 2%
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Fully insulated heat exchanger and blower section

NOTES

- Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the Lifetime Heat Exchanger Limited Warranty (good for as long as you own your home), the 12-Year Unit Replacement Limited Warranty and the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, Communicating Gas Furnace, 60k BTU/h
DM80VC0604BN

PERFORMANCE

Product Model No.	DM80VC0604BN	Product Model Name:	Two-Stage, Variable-Speed ECM, Communicating Gas Furnace, 60k BTU/h
AFUE % Rating:	80%	Rated Heating Capacity (Btu/hr):	60,000
Temperature Rise Range (°F) (Low/High):	/	Furnace Input Capacity (Btu/hr):	60,000
Rated External Static Pressure - inWG:	0.5	Furnace Output Capacity (Btu/hr):	48,000
Blower Speed (RPM):	1,075	Blower Motor Rating (HP):	3/4
Blower Input Power (kW):	1.33	Blower Available AC Tonnage (L/H):	1.50 / 4.00

PRODUCT DETAILS


Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (High / Low) (CFM):	1600 / 890
Min. Circuit Amps MCA (A):	12.1	Motor Type:	Variable Speed ECM
Max Overcurrent Protection (MOP) (A):	15	Gas Valve Type:	Two Stage
Dimensions (HxWxD) (in):	33-3/8 x 17-1/2 x 28	Installation Configuration:	Upflow/Horizontal
Number of Burners:	3	Blower Size Diameter (inch):	10
Heating Vent Diameter in. (Min/Max):	/	Blower Size Width (inch):	8
Net Weight (lb):	107	Condensate Connection (inch):	
Gross Weight (lb):	112	Sound Pressure () (dBA):	



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, Communicating Gas Furnace, 60k BTU/h
DM80VC0604BN

DIMENSIONAL DRAWING

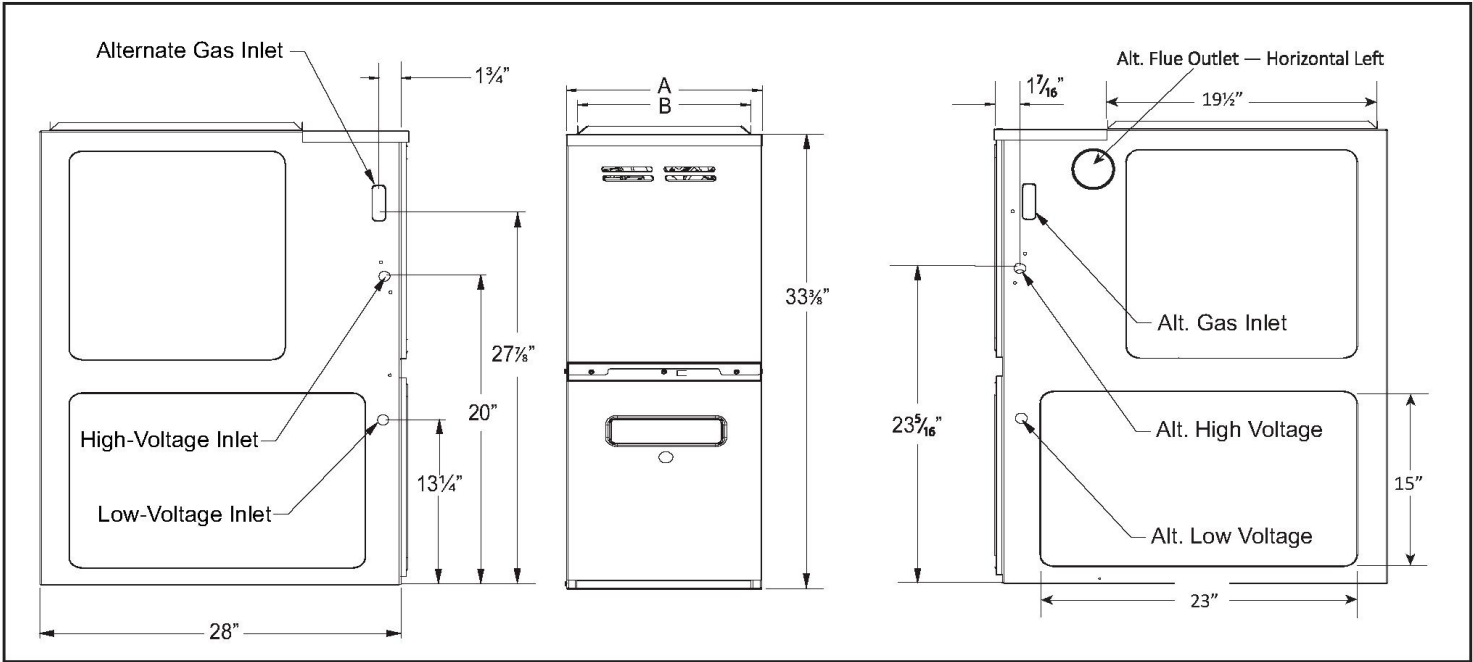

MODEL	DIMENSIONS			WIDTHS	
	W	D	H	A	B
DM80VC0603B*A	17½"	28"	33⅜"	17½"	16"
DM80VC0604B*A	17½"	28"	33⅜"	17½"	16"
DM80VC0803B*A	17½"	28"	33⅜"	17½"	16"
DM80VC0804C*A	21"	28"	33⅜"	21"	19½"
DM80VC0805C*A	21"	28"	33⅜"	21"	19½"
DM80VC1005C*A	21"	28"	33⅜"	21"	19½"
DM80VC1005D*A	24½"	28"	33⅜"	24½"	23"

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS

SIDES	REAR	FRONT ¹	VENT ²		TOP
			SW	B	
1	0	3	6	1	1

Approved for line contact in the horizontal position.
¹ 24" clearance for serviceability recommended.
² Single Wall Vent (SW) to be used only as a connector. Refer to the venting tables outlined in the Installation Manual for additional venting requirements.



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, Communicating Gas Furnace, 60k BTU/h
DM80VC0604BN

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AFE18-60A	KIT, ALL FUEL	No
AMU1620	MEDIA RETROFIT A/CLEAN	No
AMU1625	MEDIA RETROFIT A/CLEAN	No
AMU2020	MEDIA RETROFIT A/CLEAN	No
AMU2025	MEDIA RETROFIT A/CLEAN	No
ASAS-10	H.EFF.ELEC.A/CLEANER	No
ASAS-11	H.EFF.ELEC.A/CLEANER	No
ASAS-12	H.EFF.ELEC.A/CLEANER	No
ASAS-18	H.EFF.ELEC.A/CLEANER	No
DQ-P-16-100	Daikin One Powered Ventilator	No
DSEN-HAQA	Daikin One Home Air Monitor	No
DTST-CWBSA-NI-A	Daikin OnePlus Smart Thermostat w/WiFi, Cloud Connected Network Control	No
DV1-15-2817-FB	Daikin One Premium Air Cleaner, Furnace, B Cabinet	No
DV15-2817-FB	DAIKIN PREMIUM AIR CLEANER,	No
HANG21	HIGH ALTITUDE NATURAL GAS KIT	No
LPM-06	LP Conversion Kit	No