



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, communicating Gas Furnace, 40k BTU/h
DM96VC0403BN

STANDARD FEATURES

- Compatible with the Daikin One+ smart thermostat and other Daikin communicating equipment
- Heavy-duty stainless-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Two-stage gas valve provides quiet, economical heating
- Durable Silicon Nitride igniter
- Quiet two-speed induced draft blower
- Utilizes ComfortNet communicating, two stage or single-stage thermostats
- Self-diagnostic control board with constant memory fault code history output to a dual 7-segment display
- Color-coded low-voltage terminals with provisions for electronic air cleaner and humidifier
- Efficient and quiet variable-speed airflow system gently ramps up or down according to heating or cooling demand
- Multiple continuous fan speed options offer quiet air circulation
- Auto-Comfort and enhanced dehumidification modes available
- All models comply with California 40 ng/J Low NOx emissions standard
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Designed for multi-position installation: Upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) less than 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications

NOTES

- Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the Lifetime Heat Exchanger Limited Warranty (good for as long as you own your home), the 12-Year Unit Replacement Limited Warranty and the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, communicating Gas Furnace, 40k BTU/h
DM96VC0403BN

PERFORMANCE

Product Model No.	DM96VC0403BN	Product Model Name:	Two-Stage, Variable-Speed ECM, communicating Gas Furnace, 40k BTU/h
AFUE % Rating:	96%	Rated Heating Capacity (Btu/hr):	40,000
Temperature Rise Range (°F) (Low/High):	/	Furnace Input Capacity (Btu/hr):	40,000
Rated External Static Pressure - inWG:	0.5	Furnace Output Capacity (Btu/hr):	38,440
Blower Speed (RPM):	1,075	Blower Motor Rating (HP):	1/2
Blower Input Power (kW):	0.86	Blower Available AC Tonnage (L/H):	1.50 / 3.00

PRODUCT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (High) (CFM):	1200
Min. Circuit Amps MCA (A):	7.6	Motor Type:	Variable Speed
Max Overcurrent Protection (MOP) (A):	15	Gas Valve Type:	Two Stage
Dimensions (HxWxD) (in):	34-1/2 x 17-1/2 x 28-7/8	Installation Configuration:	Upflow/Horizontal
Number of Burners:	2	Blower Size Diameter (inch):	10
Heating Vent Diameter in. (Min/Max):	/	Blower Size Width (inch):	8
Net Weight (lb):	114	Condensate Connection (inch):	
Gross Weight (lb):	129	Sound Pressure () (dBA):	




Submittal Data Sheet

Two-Stage, Variable-Speed ECM, communicating Gas Furnace, 40k BTU/h

DM96VC0403BN

DIMENSIONAL DRAWING

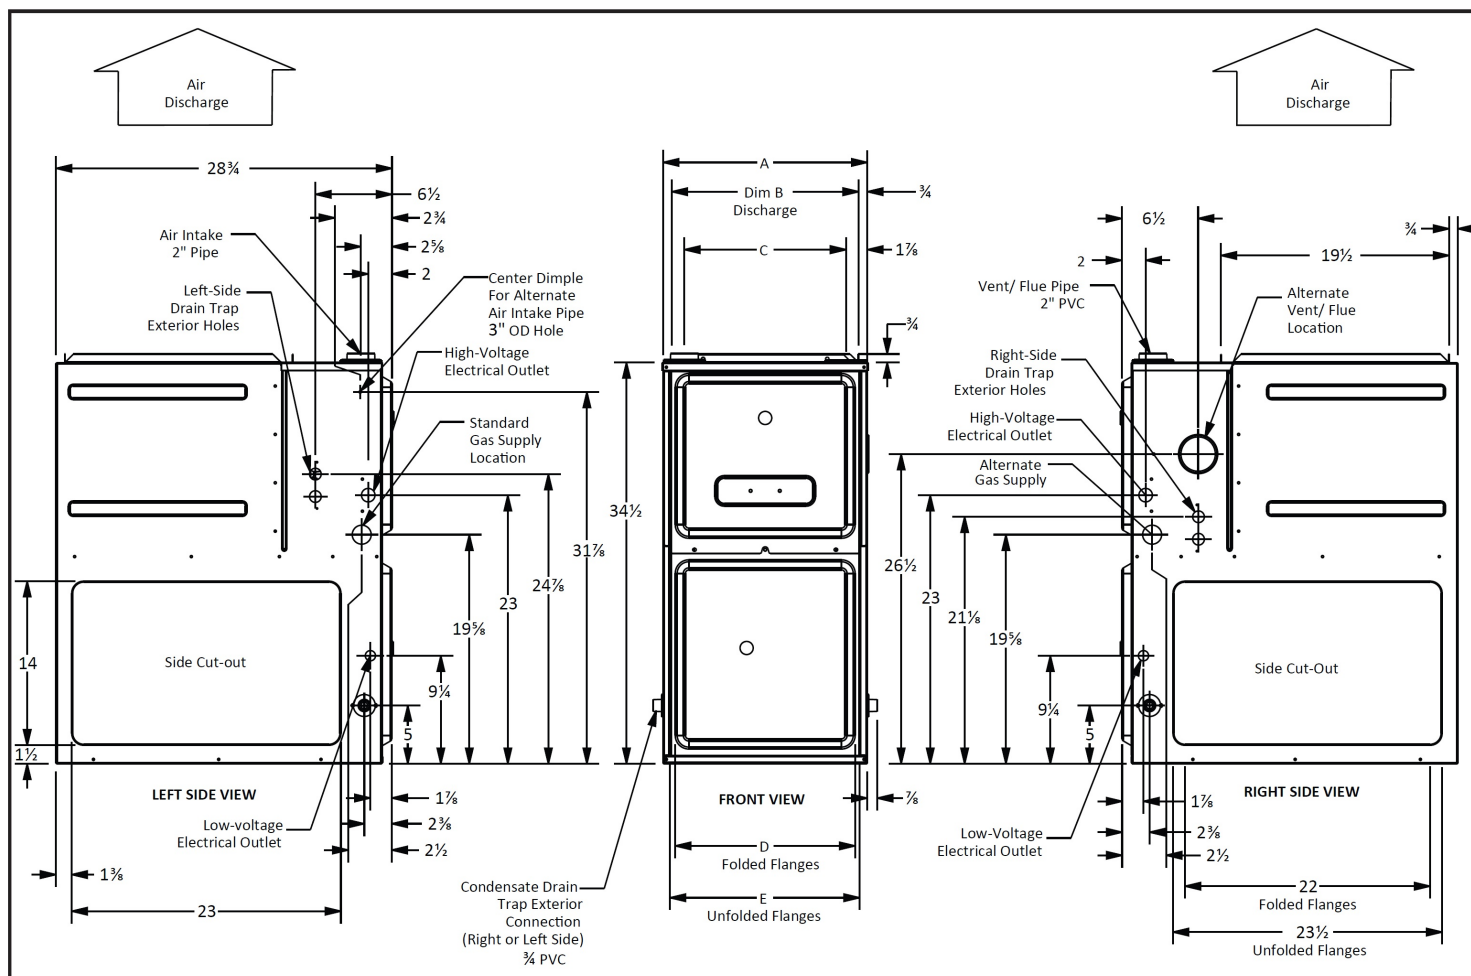

MODEL	A	B	C	D	E
DM96VC0403BNA	17 1/2"	16"	13 7/8"	12 7/8"	13 5/8"
DM96VC0603BNA	17 1/2"	16"	13 7/8"	12 7/8"	13 5/8"
DM96VC0803BNA	17 1/2"	16"	13 7/8"	12 7/8"	13 5/8"
DM96VC0804CNA	21"	19 1/2"	17 3/8"	16"	17 1/2"
DM96VC1005CNA	21"	19 1/2"	17 3/8"	16"	17 1/2"
DM96VC1205DNA	24 1/2"	23"	20 7/8"	19 3/8"	20 7/8"

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS

POSITION	SIDES	REAR	FRONT	BOTTOM	FLUE	TOP
Upflow	0"	0"	3"	C	0"	1"
Horizontal	6"	0"	3"	C	0"	6"

C = If placed on combustible floor, the floor MUST be wood ONLY.



Submittal Data Sheet

Two-Stage, Variable-Speed ECM, communicating Gas Furnace, 40k BTU/h
DM96VC0403BN

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
----------------	-------------	----------

0170K00000S	KIT, VENT, FURNACE, SIDE WALL	No
0170K00001S	KIT, VENT, FUR, SIDE WALL 2"	No
0270F05248	Drain Kit Assembly	No
72950	2" Concentric Gas Vent	No
72951	3" Concentric Gas Vent	No
AFE18-60A	KIT, ALL FUEL	No
CVENT-2	2" Concentric Vent Kit	No
CVENT-3	3" CONCENTRIC VENT KIT	No
DQ-P-16-100	Daikin One Powered Ventilator	No
DSEN-HAQA	Daikin One Home Air Monitor	No
DTST-CWBSA-NI-A	Daikin OnePlus Smart Thermostat w/WiFi, Cloud Connected Network Control	No
DV1-15-2817-FB	Daikin One Premium Air Cleaner, Furnace, B Cabinet	No
DV15-2817-FB	DAIKIN PREMIUM AIR CLEANER,	No
EFR02	EXTERNAL FILTER RACK	No
HASFK-1	HIGH ALTITUDE NAT/LP KIT	No
HASFK-4	HIGH ALTITUDE NAT/LP KIT	No
LPLP03	KIT, X-LRG HTP	No
LPM-08	LP Conversion Kit, Two Stage	No
RF000142	90% FURNACE DRAIN KIT	No