



Submittal Data Sheet

Single-Stage, 9-Speed ECM Gas Furnace up to 92%FUE, 80k BTU/h, Upflow/Horizontal
DR92SN0804CN

STANDARD FEATURES

- Heavy-duty stainless-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet single-speed induced draft blower
- Self-diagnostic control board with constant memory fault history output to 3-digit 7 segment LED display and push buttons
- Color-coded low-voltage terminals with provisions for electronic air cleaner and humidifier
- Multi-speed (9-speed tap) ECM blower motor
- Multiple continuous fan speed options offer quiet air circulation
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2021
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Designed for multi-position installation: Upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) = 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom or inlet applications



Submittal Data Sheet

Single-Stage, 9-Speed ECM Gas Furnace up to 92%FUE, 80k BTU/h, Upflow/Horizontal
DR92SN0804CN

PERFORMANCE

Product Model No.	DR92SN0804CN	Product Model Name:	Single-Stage, 9-Speed ECM Gas Furnace up to 92%FUE, 80k BTU/h, Upflow/Horizontal
AFUE % Rating:	92%	Rated Heating Capacity (Btu/hr):	
Temperature Rise Range (°F) (Low/High):	/	Furnace Input Capacity (Btu/hr):	80,000
Rated External Static Pressure - inWG:		Furnace Output Capacity (Btu/hr):	73,680
Blower Speed (RPM):		Blower Motor Rating (HP):	0.75
Blower Input Power (kW):		Blower Available AC Tonnage (L/H):	/

PRODUCT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (High) (CFM):	1,567
Min. Circuit Amps MCA (A):	13.4	Motor Type:	Multi-Speed
Max Overcurrent Protection (MOP) (A):	20	Gas Valve Type:	Single Stage
Dimensions (HxWxD) (in):	34-1/2 x 21 x 28-7/8	Installation Configuration:	Upflow/Horizontal
Number of Burners:		Blower Size Diameter (inch):	10
Heating Vent Diameter in. (Min/Max):	/	Blower Size Width (inch):	10
Net Weight (lb):	139	Condensate Connection (inch):	
Gross Weight (lb):	132	Sound Pressure () (dBA):	




Submittal Data Sheet

Single-Stage, 9-Speed ECM Gas Furnace up to 92%FUE, 80k BTU/h, Upflow/Horizontal
DR92SN0804CN

DIMENSIONAL DRAWING

DR92SN DIMENSIONS

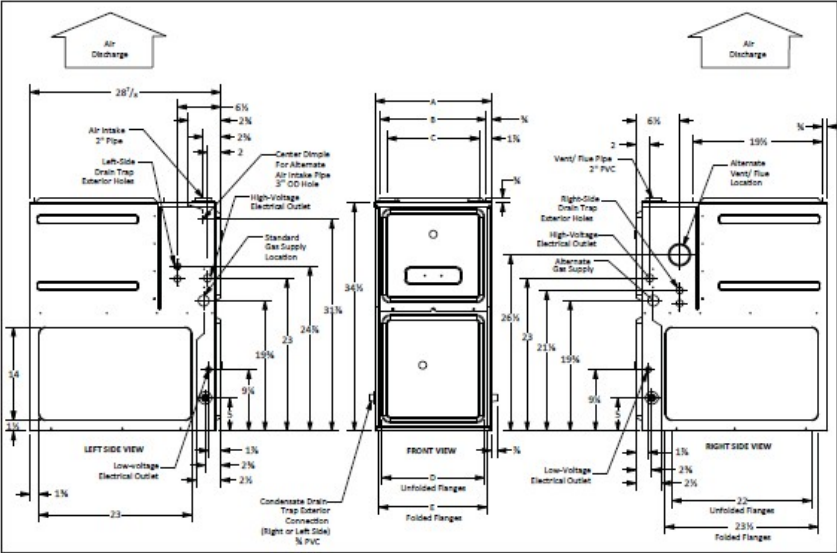

MODEL	Air Discharge					Air Return	
	A	B	C	D	E		
DR92SN0403AN	14"	12 1/2"	10 1/2"	8 1/4"	10 1/4"		
DR92SN0603BN	17 1/2"	16"	13 1/4"	12 1/4"	13 1/4"		
DR92SN0803BN	17 1/2"	16"	13 1/4"	12 1/4"	13 1/4"		
DR92SN0804CN	21"	19 1/2"	17 1/4"	16"	17 1/2"		
DR92SN0805CN	21"	19 1/2"	17 1/4"	16"	17 1/2"		
DR92SN1004CN	21"	19 1/2"	17 1/4"	16"	17 1/2"		
DR92SN1005CN	21"	19 1/2"	17 1/4"	16"	17 1/2"		
DR92SN1205DN	24 1/2"	23"	20 1/2"	19 1/4"	20 1/2"		

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS

POSITION	SIDES	REAR	FRONT	BOTTOM	FLUE	TOP
Upflow	0"	0"	1"	C	0"	1"
Horizontal	6"	0"	ALCOVE	C	0"	4"

C = If placed on combustible floor, the floor MUST be wood ONLY.



Submittal Data Sheet

Single-Stage, 9-Speed ECM Gas Furnace up to 92%FUE, 80k BTU/h, Upflow/Horizontal
DR92SN0804CN

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
No Accessories specified.		