



Submittal Data Sheet

14.3 SEER2 R-32 AC, 3.5T

DC4SEA4210

STANDARD FEATURES

- High efficiency scroll compressor
- High-density foam compressor sound blanket
- Advanced Copeland® CoreSense™ Technology
- Fully charged for 15' of tubing length
- Copper tube/ enhanced aluminum fin coil-5mm diameter
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Enclosed contactor with lug connection
- High-pressure switch
- Capacitors with extended life
- AHRI Certified
- ETL Listed

CABINET FEATURES

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Custom Nickel Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)





Submittal Data Sheet
14.3 SEER2 R-32 AC, 3.5T
DC4SEA4210


PERFORMANCE COMBINATION (HSVTC)		* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED	
Outdoor Unit Model No.	DC4SEA4210	Outdoor Unit Name:	14.3 SEER2 R-32 AC, 3.5T
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): /
* EER:		* EER2:	11.70
* SEER:		* SEER2:	14.30
* Rated Cooling Capacity (Btu/hr):	40,000		

OUTDOOR UNIT DETAILS			
Power Supply (V/Hz/Ph):	208/240 / 60 / 1	Compressor Stage:	Single Stage
Min. Circuit Amps MCA (A):	18.95	Suction Valve Connection Size (inch):	7/8
Max Overcurrent Protection (MOP) (A):	30	Liquid Valve Connection Size (inch):	3/8
Running Load:		Sound Power (High) (dBA):	71
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	55 - 125
Holding Refrigerant Charge (ozs):	82.6	Heating Operation Range (°F DB):	-
Additional Charge (ounces/ft):	0.64	Max. Pipe Length (Vertical) (ft):	79
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	200	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	71	Gross Weight (lb):	239
Dimensions (HxWxD) (in):	35.75 x 35-1/2 x 35.5		



Submittal Data Sheet
14.3 SEER2 R-32 AC, 3.5T
DC4SEA4210

DIMENSIONAL DRAWING

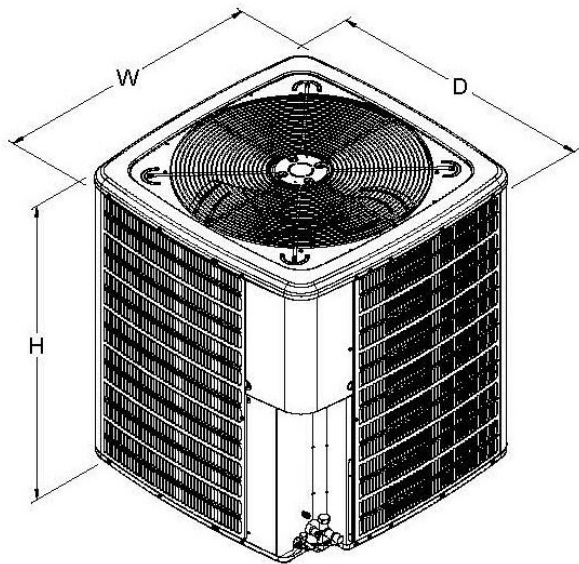

MODEL	DIMENSIONS		
	W"	D"	H"
DC4SEA1810A*	26	26	27
DC4SEA2410A*	26	26	32½
DC4SEA3010A*	29	29	35¾
DC4SEA3610A*	29	29	39½
DC4SEA4210A*	35½	35½	35¾
DC4SEA4810A*	35½	35½	35¾
DC4SEA6010A*	35½	35½	39½



Submittal Data Sheet
14.3 SEER2 R-32 AC, 3.5T
DC4SEA4210

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
ABK-20	ANCHOR BRACKET KIT	No
ASC01A	ANTI-SHORT CYCLE KIT	No
CSR-U-1	Compressor Saver - Hard Start Kit - 1 TO 3 Ton	No
FSK01A	Freeze-Stat Kit	No
LAKT01	Low Ambient Kit	No
LSK02A	SOLENOID KIT FOR REM	No