



## Submittal Data Sheet

14.3 SEER2 R-32 AC, 4.0T

DC4SEA4810

### STANDARD FEATURES

- High efficiency scroll compressor
- High-density foam compressor sound blanket
- Advanced Copeland® CoreSense™ Technology
- Fully charged for 15' of tubing length
- Copper tube/ enhanced aluminum fin coil-5mm diameter
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Enclosed contactor with lug connection
- High-pressure switch
- Capacitors with extended life
- AHRI Certified
- ETL Listed

### CABINET FEATURES

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Custom Nickel Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)





**Submittal Data Sheet**  
14.3 SEER2 R-32 AC, 4.0T  
DC4SEA4810

**PERFORMANCE COMBINATION (HSVTC)**      \* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

|                                    |                                                     |                           |                                               |
|------------------------------------|-----------------------------------------------------|---------------------------|-----------------------------------------------|
| Outdoor Unit Model No.             | DC4SEA4810                                          | Outdoor Unit Name:        | 14.3 SEER2 R-32 AC, 4.0T                      |
| Rated Cooling Conditions:          | Indoor (°F DB/WB): /<br>Ambient (°F DB/WB): 95 / 75 | Rated Heating Conditions: | Indoor (°F DB/WB): /<br>Ambient (°F DB/WB): / |
| * EER:                             |                                                     | * EER2:                   | 11.70                                         |
| * SEER:                            |                                                     | * SEER2:                  | 13.80                                         |
| * Rated Cooling Capacity (Btu/hr): | 46,000                                              |                           |                                               |


**OUTDOOR UNIT DETAILS**

|                                       |                       |                                       |              |
|---------------------------------------|-----------------------|---------------------------------------|--------------|
| Power Supply (V/Hz/Ph):               | 208/240 / 60 / 1      | Compressor Stage:                     | Single Stage |
| Min. Circuit Amps MCA (A):            | 25.189999999999998    | Suction Valve Connection Size (inch): | 7/8          |
| Max Overcurrent Protection (MOP) (A): | 40                    | Liquid Valve Connection Size (inch):  | 3/8          |
| Running Load:                         |                       | Sound Power (High) (dBA):             | 72           |
| Refrigerant Type:                     | R-32                  | Cooling Operation Range (°F DB):      | 55 - 125     |
| Holding Refrigerant Charge (ozs):     | 91                    | Heating Operation Range (°F DB):      | -            |
| Additional Charge (ounces/ft):        | 0.64                  | Max. Pipe Length (Vertical) (ft):     | 79           |
| Pre-charge Piping (Length) (ft):      | 15                    | Min. Cooling Range w/Baffle (°F DB):  |              |
| Max. Pipe Length (Total) (ft):        | 200                   | Min. Heating Range w/Baffle (°F DB):  |              |
| Net Weight (lb):                      | 72                    | Gross Weight (lb):                    | 241          |
| Dimensions (HxWxD) (in):              | 35.75 x 35-1/2 x 35.5 |                                       |              |



**Submittal Data Sheet**  
14.3 SEER2 R-32 AC, 4.0T  
DC4SEA4810

**DIMENSIONAL DRAWING**

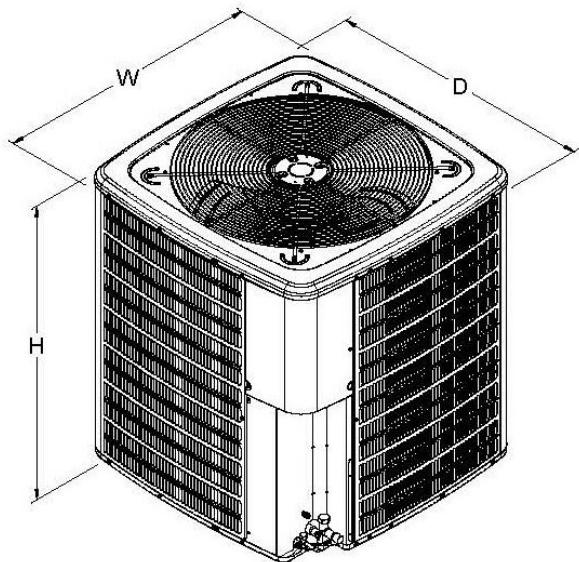

| MODEL        | DIMENSIONS |     |     |
|--------------|------------|-----|-----|
|              | W"         | D"  | H"  |
| DC4SEA1810A* | 26         | 26  | 27  |
| DC4SEA2410A* | 26         | 26  | 32½ |
| DC4SEA3010A* | 29         | 29  | 35¾ |
| DC4SEA3610A* | 29         | 29  | 39½ |
| DC4SEA4210A* | 35½        | 35½ | 35¾ |
| DC4SEA4810A* | 35½        | 35½ | 35¾ |
| DC4SEA6010A* | 35½        | 35½ | 39½ |



**Submittal Data Sheet**  
14.3 SEER2 R-32 AC, 4.0T  
DC4SEA4810

ACCESSORIES

| PART<br>NUMBER | DESCRIPTION                                    | INCLUDED |
|----------------|------------------------------------------------|----------|
| ABK-20         | ANCHOR BRACKET KIT                             | No       |
| ASC01A         | ANTI-SHORT CYCLE KIT                           | No       |
| CSR-U-1        | Compressor Saver - Hard Start Kit - 1 TO 3 Ton | No       |
| FSK01A         | Freeze-Stat Kit                                | No       |
| LAKT01         | Low Ambient Kit                                | No       |
| LSK02A         | SOLENOID KIT FOR REM                           | No       |