



Submittal Data Sheet

fit 16.2 s2 r32 inv-1.5t ac

DC6VSS1810

STANDARD FEATURES

- Daikin variable-speed swing compressors
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Daikin control algorithmic logic
- In communicating mode, only two low-voltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Daikin Inside intelligence for diagnostics
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed



CABINET FEATURES

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion-resistant (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



Submittal Data Sheet

fit 16.2 s2 r32 inv-1.5t ac
DC6VSS1810

PERFORMANCE COMBINATION (HSVTC) * VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DC6VSS1810	Outdoor Unit Name:	fit 16.2 s2 r32 inv-1.5t ac
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): /
* EER:		* EER2:	12.00
* SEER:		* SEER2:	19.00
* Rated Cooling Capacity (Btu/hr):	17,100		

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Min. Circuit Amps MCA (A):	12.8	Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):	15	Liquid Valve Connection Size (inch):	3/8
Fan/Compressor Drive Input:	8.1	Sound Power (High) (dBA):	61
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	0 - 115
Holding Refrigerant Charge (ozs):	74	Heating Operation Range (°F DB):	-
Additional Charge (ounces/ft):		Max. Pipe Length (Vertical) (ft):	90
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	100	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	119	Gross Weight (lb):	136
Dimensions (HxWxD) (in):	27.375 x 36-5/8 x 13.75		


Submittal Data Sheet

fit 16.2 s2 r32 inv-1.5t ac

DC6VSS1810

DIMENSIONAL DRAWING

MODEL	DIMENSIONS		
	W"	D"	H"
DC6VSS1810A*/ DC6VSA181WA	36 $\frac{1}{4}$	13 $\frac{1}{4}$	27 $\frac{1}{4}$
DC6VSS2410A*/ DC6VSA241WA*	36 $\frac{1}{4}$	13 $\frac{1}{4}$	27 $\frac{1}{4}$
DC6VSS3010A*/ DC6VSA301WA*	36 $\frac{1}{4}$	13 $\frac{1}{4}$	27 $\frac{1}{4}$
DC6VSS3610A*/ DC6VSA361WA*	36 $\frac{1}{4}$	13 $\frac{1}{4}$	27 $\frac{1}{4}$

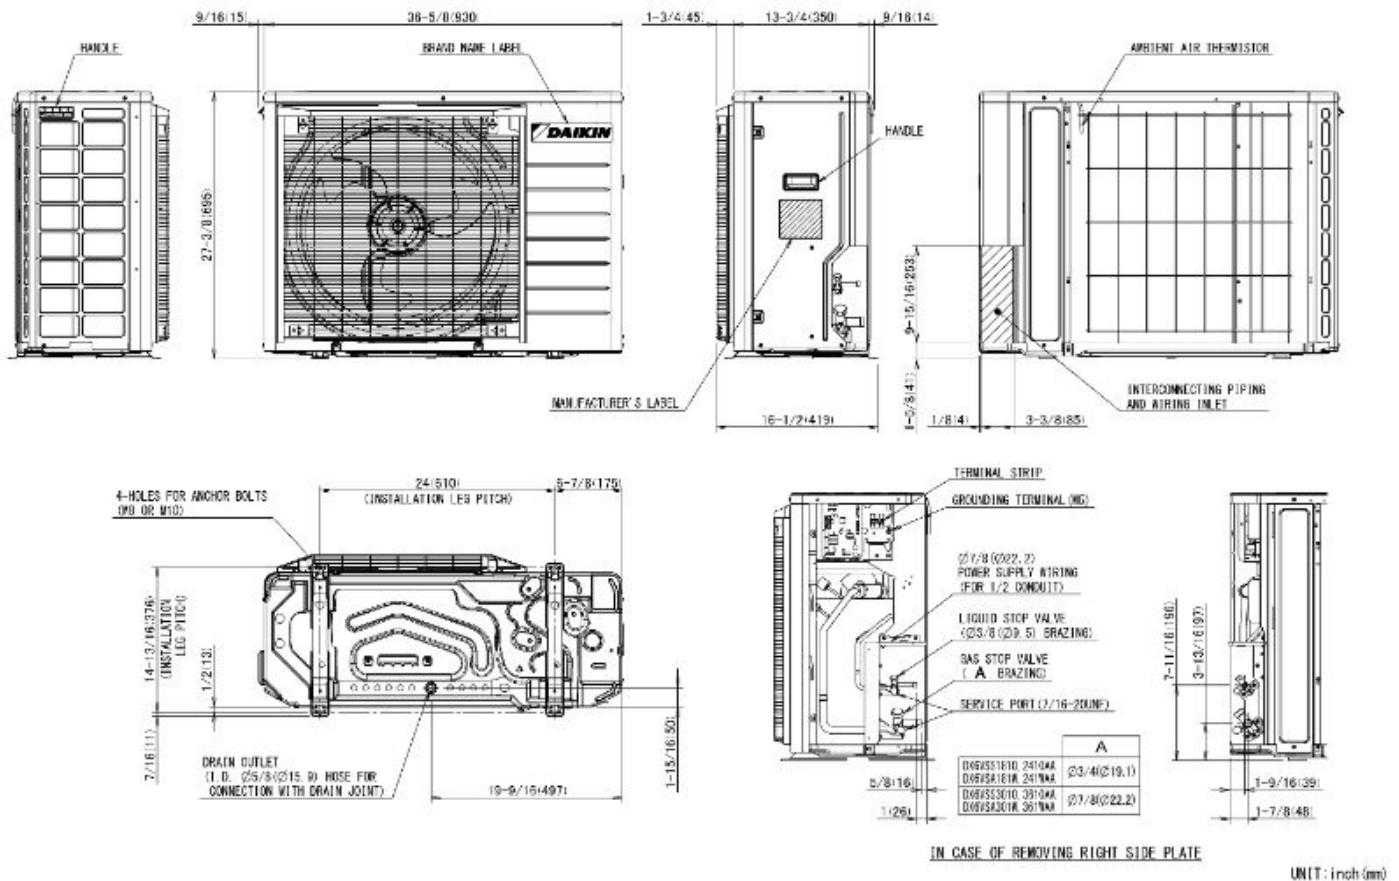



Submittal Data Sheet
fit 16.2 s2 r32 inv-1.5t ac
DC6VSS1810

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
130-DK-006	Hail Guard	No
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
DSEN-HAQA	Daikin One Home Air Monitor	No
KPW5G112	Air Adjustment Grille/ Wind Baffle	No