



## Submittal Data Sheet

17.2 seer2 ac, 2stg 4.0t

DC7TCA4810

### STANDARD FEATURES

- Two-Stage Copeland® Ultra-Tech scroll compressor
- High-density foam compressor sound blanket
- Compatible with Daikin One Plus smart thermostat and other Daikin communicating equipment
- Copeland® ComfortAlert™ built in diagnostics
- Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- Diagnostic indicator lights and fault code storage
- Color-coded terminal strip
- Quiet ECM outdoor fan motor
- Fully charged for 15' of tubing length
- Factory-installed filter drier
- Ambient temperature sensors
- High- and low-pressure switches
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

### CABINET FEATURES

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available).





Submittal Data Sheet

17.2 seer2 ac, 2stg 4.0t

DC7TCA4810

PERFORMANCE COMBINATION (HSVTC) \* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

|                                    |                                                  |                           |                                            |
|------------------------------------|--------------------------------------------------|---------------------------|--------------------------------------------|
| Outdoor Unit Model No.             | DC7TCA4810                                       | Outdoor Unit Name:        | 17.2 seer2 ac, 2stg 4.0t                   |
| Rated Cooling Conditions:          | Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75 | Rated Heating Conditions: | Indoor (°F DB/WB): / Ambient (°F DB/WB): / |
| * EER:                             |                                                  | * EER2:                   | 12.00                                      |
| * SEER:                            |                                                  | * SEER2:                  | 15.20                                      |
| * Rated Cooling Capacity (Btu/hr): | 48,000                                           |                           |                                            |

OUTDOOR UNIT DETAILS


|                                       |                        |                                       |           |
|---------------------------------------|------------------------|---------------------------------------|-----------|
| Power Supply (V/Hz/Ph):               | 208/230 / 60 / 1       | Compressor Stage:                     | Two Stage |
| Min. Circuit Amps MCA (A):            | 31.6                   | Suction Valve Connection Size (inch): | 7/8       |
| Max Overcurrent Protection (MOP) (A): | 50                     | Liquid Valve Connection Size (inch):  | 3/8       |
| Running Load:                         |                        | Sound Power (High) (dBA):             | 73        |
| Refrigerant Type:                     | R-32                   | Cooling Operation Range (°F DB):      | 55 - 125  |
| Holding Refrigerant Charge (ozs):     | 180                    | Heating Operation Range (°F DB):      | -         |
| Additional Charge (ounces/ft):        |                        | Max. Pipe Length (Vertical) (ft):     | 79        |
| Pre-charge Piping (Length) (ft):      | 15                     | Min. Cooling Range w/Baffle (°F DB):  |           |
| Max. Pipe Length (Total) (ft):        | 200                    | Min. Heating Range w/Baffle (°F DB):  |           |
| Net Weight (lb):                      | 276                    | Gross Weight (lb):                    | 301       |
| Dimensions (HxWxD) (in):              | 41.625 x 35-1/2 x 35.5 |                                       |           |



**Submittal Data Sheet**  
17.2 seer2 ac, 2stg 4.0t  
DC7TCA4810

**DIMENSIONAL DRAWING**

| MODEL        | DIMENSIONS |     |     |
|--------------|------------|-----|-----|
|              | W"         | D"  | H"  |
| DC7TCA2410A* | 35½        | 35½ | 39½ |
| DC7TCA3610A* | 35½        | 35½ | 39½ |
| DC7TCA4810A* | 35½        | 35½ | 41⅝ |
| DC7TCA6010A* | 35½        | 35½ | 41⅝ |

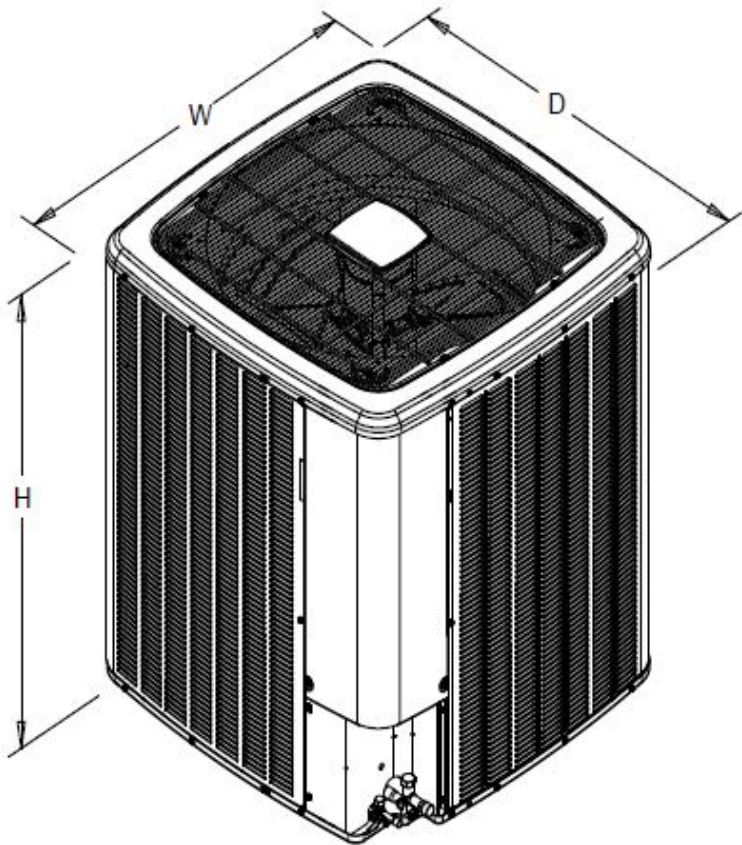



**Submittal Data Sheet**  
17.2 seer2 ac, 2stg 4.0t  
DC7TCA4810

ACCESSORIES

| PART NUMBER  | DESCRIPTION                 | INCLUDED |
|--------------|-----------------------------|----------|
| ABK-20       | ANCHOR BRACKET KIT          | No       |
| ASC01A       | ANTI-SHORT CYCLE KIT        | No       |
| CSR-U-2      | 3 TO 5 TON COMP SAVER 25/CS | No       |
| FSK01A       | Freeze-Stat Kit             | No       |
| LSK02A       | SOLENOID KIT FOR REM        | No       |
| OT18-60A     | Outdoor Thermostat Kit      | No       |
| TXV-FX-KX-5T | TXV-FX-KX-5T-Srv Kit        | No       |