




Submittal Data Sheet

2.5T Ceiling Mount AHU

ACST30LU1300

STANDARD FEATURES

- 1. Factory installed TXV for heat pump and cooling-only applications
- 2. All-Aluminum tube/aluminum fin coil
- 3. Direct-drive, resilient-mount, multi-speed motor
- 3. Sequence-controlled and rust-resistant nickel chromium heating elements of 5, 6, 8 and 10 kW
- 4. High-efficiency evaporator coil
- 5. Quiet operation
- 6. AHRI Certified
- 7. Suitable for both front and bottom return
- 8. Factory installed casing
- 9. UL 2-40 certified
- 10. ETL Listed
- 11. Suitable for free-return installation (non-ducted return air)
- 12. Galvanized-steel construction
- 13. Factory-installed pull-type disconnect
- 14. Easy service access
- 15. Optimized for use with R-32 refrigerant with factory installed leak detection sensor for A2L mitigation.

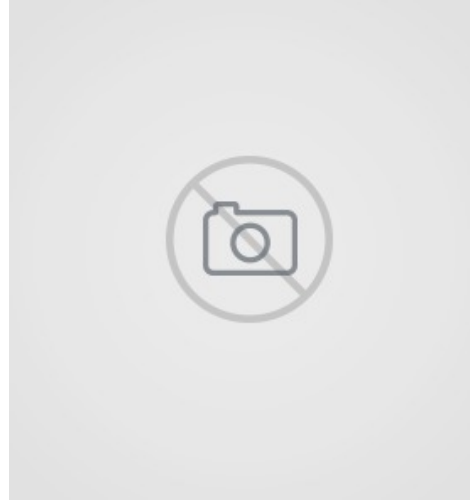

CABINET FEATURES

- 1. Primary/secondary drain connection in a high-temperature plastic drain pan
- 2. Suitable for free-return installation (non-ducted return air)
- 3. Galvanized-steel construction
- 4. Factory-installed pull-type disconnect
- 5. Easy service access
- 6. Suitable for both front and bottom return
- 7. Factory installed casing



Submittal Data Sheet
2.5T Ceiling Mount AHU
ACST30LU1300

PERFORMANCE

Product Model No.	ACST30LU1300	Product Model Name:	2.5T Ceiling Mount AHU
Type:	Air Handler	Cooling Capacity (Nominal) (Btu/hr):	30,000
Blower Motor Rating (HP):	1/4		


PRODUCT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 /	Airflow Rate (High) (CFM):	
Min. Circuit Amps MCA (A):	29.6/33.8	Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):	15/15	Liquid Valve Connection Size (inch):	3/8
Dimensions (HxWxD) (in):	11 x 54-1/5 x 22.2	Condensate Connection (inch):	3/4
Net Weight (lb):	97	Blower Size Diameter (inch):	6.7
Gross Weight (lb):	1	Blower Size Width (inch):	8.06



Submittal Data Sheet
2.5T Ceiling Mount AHU
ACST30LU1300

DIMENSIONAL DRAWING

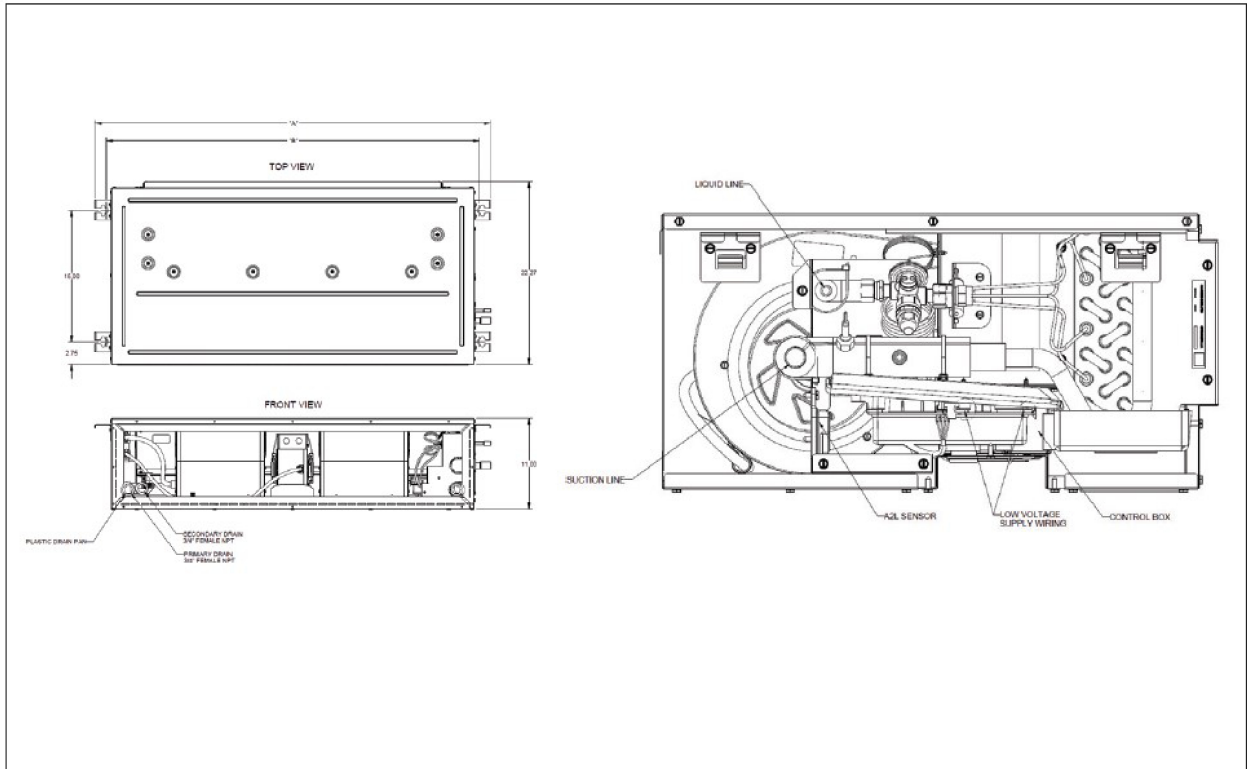

	ACST18	ACST24	ACST30
A	48 ¹ / ₅	54 ¹ / ₅	54 ¹ / ₅
B	45 ⁷ / ₁₆	51 ⁷ / ₁₆	51 ⁷ / ₁₆
C	36 ¹ / ₅	42 ¹ / ₅	42 ¹ / ₅
D	6 ¹ / ₂	6 ¹ / ₂	6 ¹ / ₂