



## Submittal Data Sheet

R-32 Daikin Aurora 0.75 Ton Ducted Concealed Heat Pump System

FDMA09AVJU9RXP09AVJU9

### FEATURES

- Automatic defrosting & Automatic cooling/heating change over
- Auto Restart after Power failure
- Operation Range—Cooling (50°F - 114.8°F)
- Low temperature cooling operation down to -4°F (-20°C) with wind baffle and field settings
- Operating Range - Heating (-13.8°F - 64.4°F)
- 12-year limited parts and compressor warranty with online registration
- 5-year limited parts warranty for commercial applications
- Inverter controlled Swing compressor with Reluctance DC motor
- Auto Fan Speed
- 3-Step Switchable Fan speed
- Quick Warming function
- Program dry operation
- Fan-only mode
- ECONO operation
- Titanium Apatite deodorizing filter
- Filter Cleaning Indicator
- Anti-corrosion treatment on outdoor heat exchanger
- Factory charged for up to 49.2 ft. of piping length
- Built in refrigeration detection system

### BENEFITS

- Inverter and PAM control technologies optimize energy use, delivering efficient performance and reduced electricity consumption
- Concealed systems preserve interior aesthetics by eliminating bulky wall-mounted unit ideal for minimalist and design-focused homes
- Concealed ducted mini splits offer zoned comfort with minimal ductwork, preserving the architectural integrity of historic homes
- Concealed ducted systems efficiently condition large or multi-room spaces using flexible ductwork, offering seamless comfort without multiple wall units
- Compact concealed systems deliver efficient, quiet comfort in small apartments without occupying valuable walls or floor space
- Flexible installation options—either-side drain, and factory charged for up to 49.2 ft. of piping length —simplify setup and reduce labor costs
- Concealed systems maintain visual harmony by delivering discreet comfort without distracting from high-end displays or artwork.
- Concealed systems deliver efficient climate control while preserving a clean, professional look free from exposed HVAC components
- Concealed ducted mini-splits offer a space-saving, energy-efficient solution for individual climate control in apartments and condominiums
- Concealed systems provide quiet, zoned climate control with advanced filtration—ideal for maintaining comfort and air quality in hospitals and hotels

### INDOOR UNIT



### OUTDOOR UNIT





Submittal Data Sheet

R-32 Daikin Aurora 0.75 Ton Ducted Concealed Heat Pump System  
FDMA09AVJU9RXP09AVJU9

SYSTEM PERFORMANCE

|                                    |                |                                  |                                                           |
|------------------------------------|----------------|----------------------------------|-----------------------------------------------------------|
| Indoor Unit Model No.              | FDMA09AVJU9    | Indoor Unit Name:                | R-32 0.75 Ton Ducted Concealed Indoor Unit                |
| Outdoor Unit Model No.             | RXP09AVJU9     | Outdoor Unit Name:               | Daikin Aurora R-32 0.75 Ton Heat pump outdoor unit        |
| Rated Cooling Capacity (Btu/hr):   | 9,000          | Rated Cooling Conditions:        | Indoor (°F DB/WB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 |
| Sensible Capacity (Btu/hr):        | 6,910          | Rated Piping Length(ft):         | 25                                                        |
| Max/Min Cooling Capacity (Btu/hr): | 9,400 / 4,400  | Rated Height Difference (ft):    | 0.00                                                      |
| Cooling Input Power (kW):          | 0.860          | Heating Input Power (kW):        | 1.29                                                      |
| SEER2 (Non-Ducted/Ducted):         | / 16.00        | HSPF2 (Non-Ducted/Ducted):       | / 9.0                                                     |
| EER2 (Non-Ducted/Ducted):          | / 11.10        | Heating COP (Non-Ducted/Ducted): | 3.0 /                                                     |
| Rated Heating Capacity (Btu/hr):   | 10,900         | Rated Heating Conditions:        | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |
| Max/Min Heating Capacity (Btu/hr): | 12,800 / 4,400 |                                  |                                                           |

SYSTEM DETAILS

|                                        |      |                                   |          |
|----------------------------------------|------|-----------------------------------|----------|
| Refrigerant Type:                      | R-32 | Cooling Operation Range (°F DB):  | 50 - 115 |
| Holding Refrigerant Charge (lbs):      | 1.74 | Heating Operation Range (°F WB):  | -14 - 64 |
| Additional Charge (oz/ft):             | 0.22 | Max. Pipe Length (Vertical) (ft): | 49       |
| Pre-charge Piping (Length) (ft):       | 49   | Cooling Range w/Baffle (°F DB):   | -4 - 115 |
| Max. Pipe Length (Total) (ft):         | 66   |                                   |          |
| Max Height Separation (Ind to Ind ft): | 0    |                                   |          |
| Fan/Compressor Drive Input:            | 9    |                                   |          |

# Submittal Data Sheet


R-32 Daikin Aurora 0.75 Ton Ducted Concealed Heat Pump System  
FDMA09AVJU9RXP09AVJU9

## INDOOR UNIT DETAILS

|                                          |                          |                                |             |
|------------------------------------------|--------------------------|--------------------------------|-------------|
| Power Supply (V/Hz/Ph):                  | 208-230 / 60 / 1         | Airflow Rate (H/M/L) (CFM):    | 401/338/279 |
| Power Supply Connections:                |                          | Moisture Removal (Gal/hr):     |             |
| Min. Circuit Amps MCA (A):               |                          | Gas Pipe Connection (inch):    | 3/8         |
| Max Overcurrent Protection (MOP) (A):    |                          | Liquid Pipe Connection (inch): | 1/4         |
| Dimensions (HxWxD) (in):                 | 9-5/8 x 27-9/16 x 31-1/2 | Condensate Connection (inch):  | 1           |
| Ext. Static Pressure (Rated/Max) (inWg): | 0.6 /                    | Sound Pressure (H) (dBA):      | 32          |
| Net Weight (lb):                         | 64                       | Sound Power Level (dBA):       |             |

## DIMENSIONAL DRAWING - INDOOR UNIT

FDMA09/12AVJU9

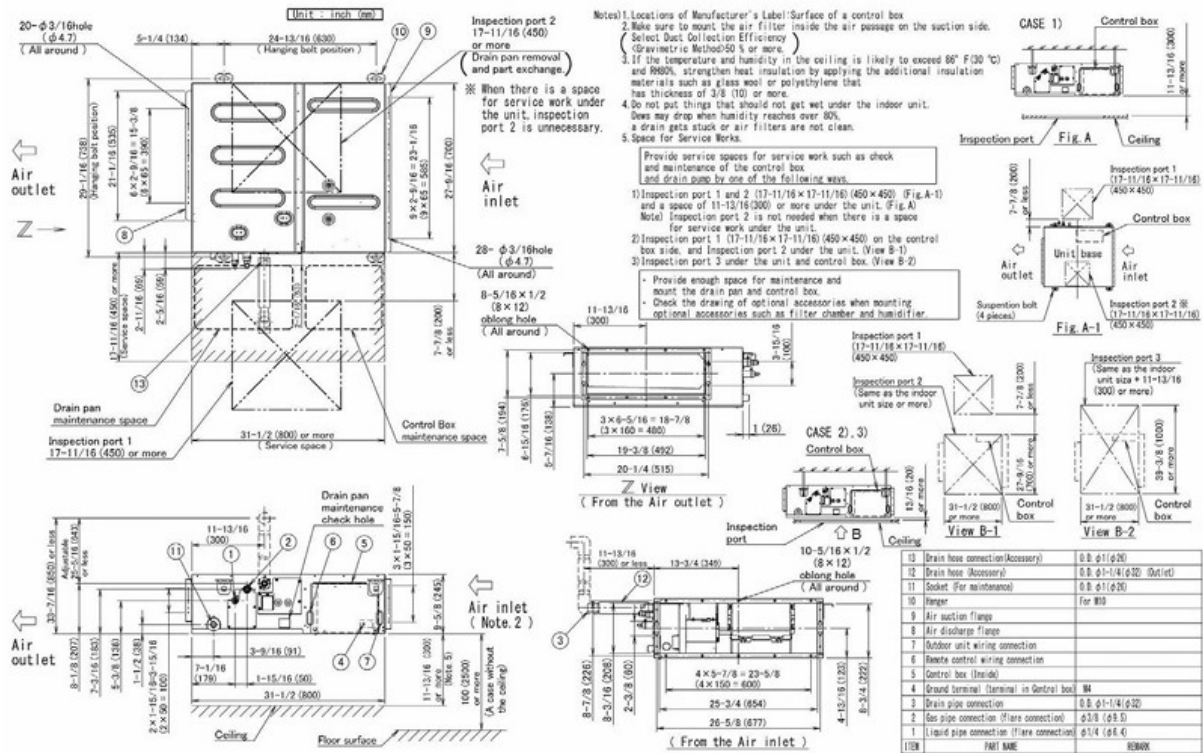

3D112918D




Submittal Data Sheet

R-32 Daikin Aurora 0.75 Ton Ducted Concealed Heat Pump System  
FDMA09AVJU9RXP09AVJU9

OUTDOOR UNIT DETAILS

|                                       |                              |                                |          |
|---------------------------------------|------------------------------|--------------------------------|----------|
| Power Supply (V/Hz/Ph):               | 208/230 / 60 / 1             | Compressor Stage:              | Inverter |
| Power Supply Connections:             |                              | Capacity Control Range (%):    | -        |
| Min. Circuit Amps MCA (A):            | 11.6                         | Airflow Rate (H/M) (CFM):      | /1,126   |
| Max Overcurrent Protection (MOP) (A): | 15                           | Gas Pipe Connection (inch):    | 3/8      |
| Max Starting Current MSC(A):          |                              | Liquid Pipe Connection (inch): | 1/4      |
| Rated Load Amps RLA(A):               |                              | Sound Pressure (H) (dBA):      | 50       |
| Dimensions (HxWxD) (in):              | 21-15/16 x 26-9/26 x 11-3/16 | Sound Power Level (dBA):       |          |
| Net Weight (lb):                      | 72                           |                                |          |

DIMENSIONAL DRAWING - OUTDOOR UNIT  
RXP09/12AVJU9

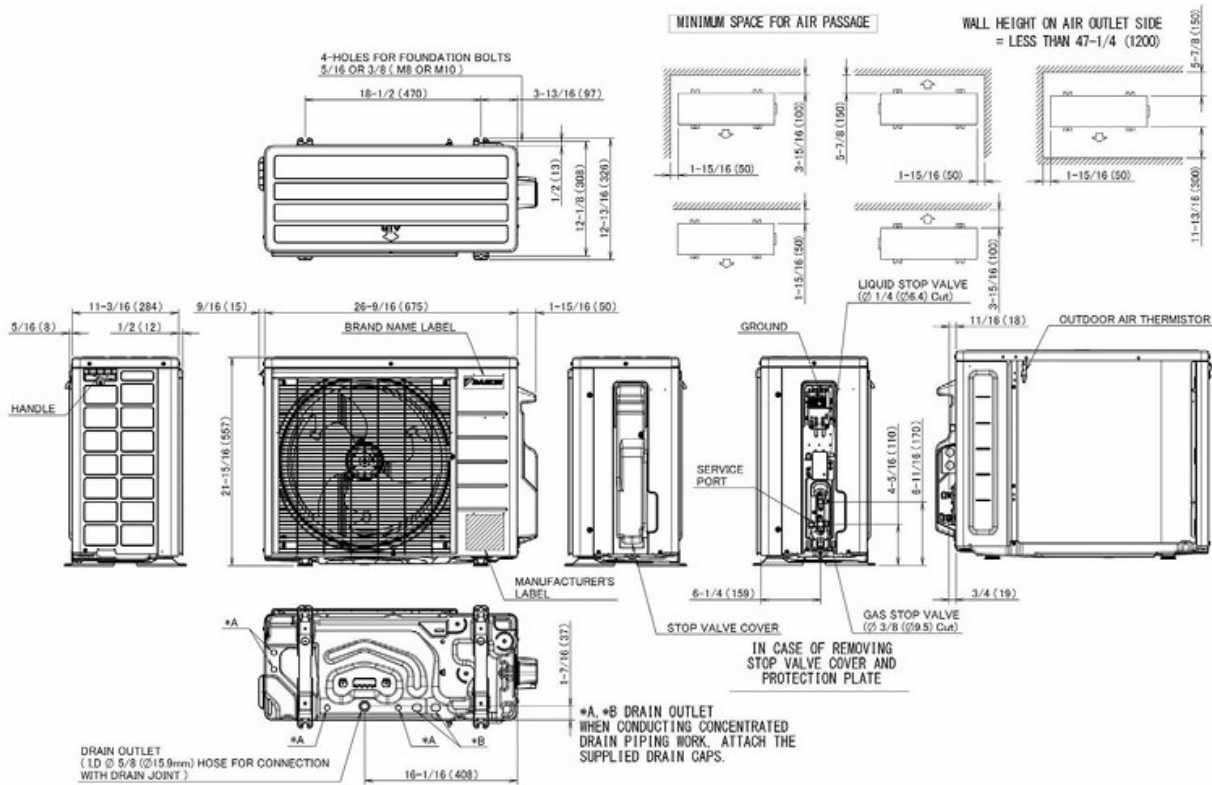

3D152019



**Submittal Data Sheet**

R-32 Daikin Aurora 0.75 Ton Ducted Concealed Heat Pump System  
FDMA09AVJU9RXP09AVJU9

INDOOR ACCESSORIES

| PART NUMBER | DESCRIPTION                      | INCLUDED |
|-------------|----------------------------------|----------|
| BRC1NRV71   | R32 Navigation Remote Controller | No       |
| DCS302C71   | Centralized Controller           | No       |
| DST301BA61  | Schedule Timer                   | No       |
| KRCS01-6B   | Remote Sensor                    | No       |
| KRP1C76     | Wiring Adapter PCB               | No       |

OUTDOOR ACCESSORIES

| PART NUMBER | DESCRIPTION                               | INCLUDED |
|-------------|-------------------------------------------|----------|
| KEH068A41   | Drain Pan Heater                          | No       |
| KKG067A41   | Back protection wire net (09 & 12)        | No       |
| KKP937A4    | Drain Plug for OD Unit                    | Yes      |
| KPS067A41   | Snow hood (intake side plate) (09 & 12)   | No       |
| KPS067A42   | Snow hood (intake rear plate) (09 & 12)   | No       |
| KPS067A44   | Snow hood (outlet) (09 & 12)              | No       |
| KPW937F4    | Air direction adjustment grille (09 & 12) | No       |