



Submittal Data Sheet

R-32 2 Ton Wall Mounted Daikin OTERRA Cooling only System
FTKF24BVJU9-RKF24BVJU9

FEATURES

- Built in WI-FI
- Daikin Swing Compressor
- Indoor Quiet Operation
- Included Handheld Remote
- Titanium Apatite Air Purifying Filter
- Anti-Corrosion Treatment of outdoor Heat Exchanger

INDOOR UNIT



BENEFITS

- R-32 Easy, Proven, Efficient, Available
- Precharged Line set - 49 ft
- Cooling Operation Range - 50-118F for 9K/12K 50-122F for 18/24K
- 12 Year Parts and Compressor Registered Residential Warranty
- 5 year Parts and Compressor Commercial Warranty
- Cooling down to -4F for Facilities (See Installation Manual)

OUTDOOR UNIT





Submittal Data Sheet

R-32 2 Ton Wall Mounted Daikin OTERRA Cooling only System
FTKF24BVJU9-RKF24BVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTKF24BVJU9	Indoor Unit Name:	R-32 Daikin OTERRA 2 Ton AC only mini Split Indoor unit
Outdoor Unit Model No.	RKF24BVJU9	Outdoor Unit Name:	R-32 2-Ton, Cooling only, Ductless ODU Daikin OTERRA
Rated Cooling Capacity (Btu/hr):	22,400	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	16,660	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	26,400 / 7,000	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	2.460		
SEER2 (Non-Ducted/Ducted):	21.00 /		
EER2 (Non-Ducted/Ducted):	12.00 /		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 122
Holding Refrigerant Charge (lbs):	2.45		
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	66
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-4 - 122
Max. Pipe Length (Total) (ft):	99		
Max Height Separation (Ind to Ind ft):	0		
Fan/Compressor Drive Input:	17.6		

Submittal Data Sheet

R-32 2 Ton Wall Mounted Daikin OTERRA Cooling only System


FTKF24BVJU9-RKF24BVJU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	629/501/378/335
Power Supply Connections:	L1,L2,L3 Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-5/8 x 39-3/8 x 10-3/8	Condensate Connection (inch):	5/8
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L/SL) (dBA):	52/45/38/34
Net Weight (lb):	28	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

FTKF24BVJU9

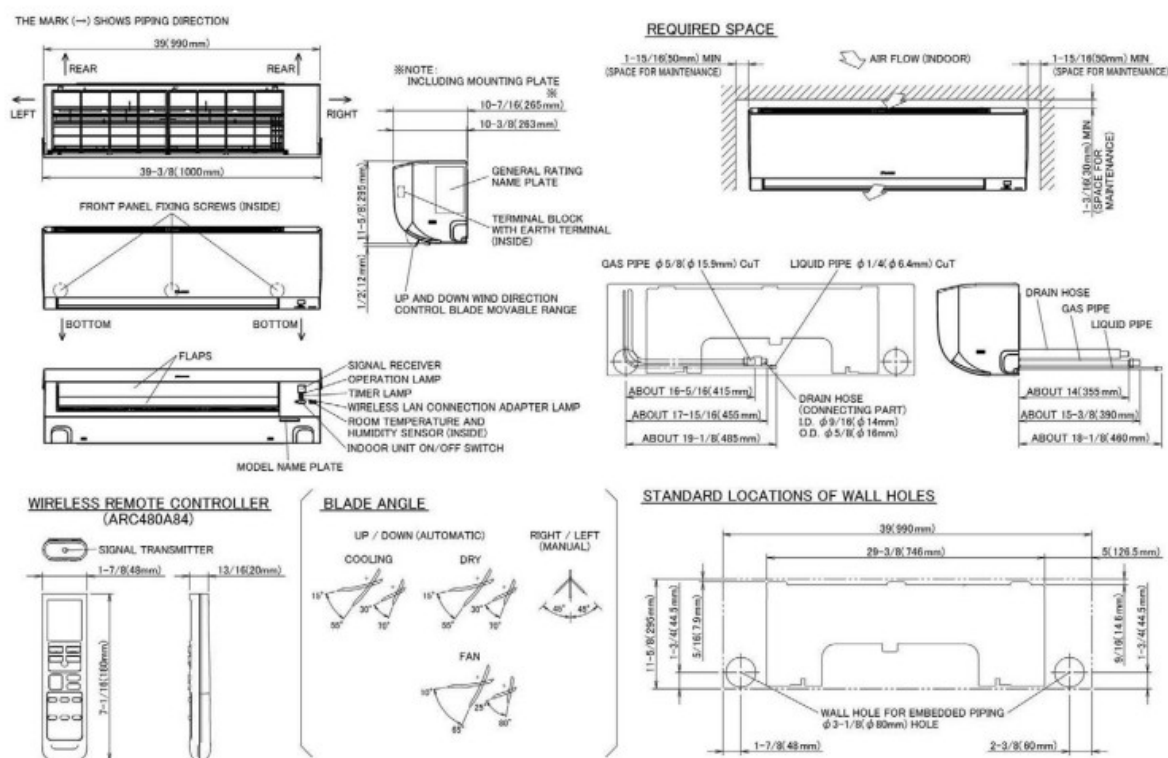

3D153515

Submittal Data Sheet

R-32 2 Ton Wall Mounted Daikin OTERRA Cooling only System


FTKF24BVJU9-RKF24BVJU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	L1, L2, L3, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	21.4	Airflow Rate (H) (CFM):	2327
Max Overcurrent Protection (MOP) (A):	25	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	54
Dimensions (HxWxD) (in):	29-1/2 x 34-1/4 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	113		

DIMENSIONAL DRAWING - OUTDOOR UNIT

RKF24BVJU9, RXF24BVJU9

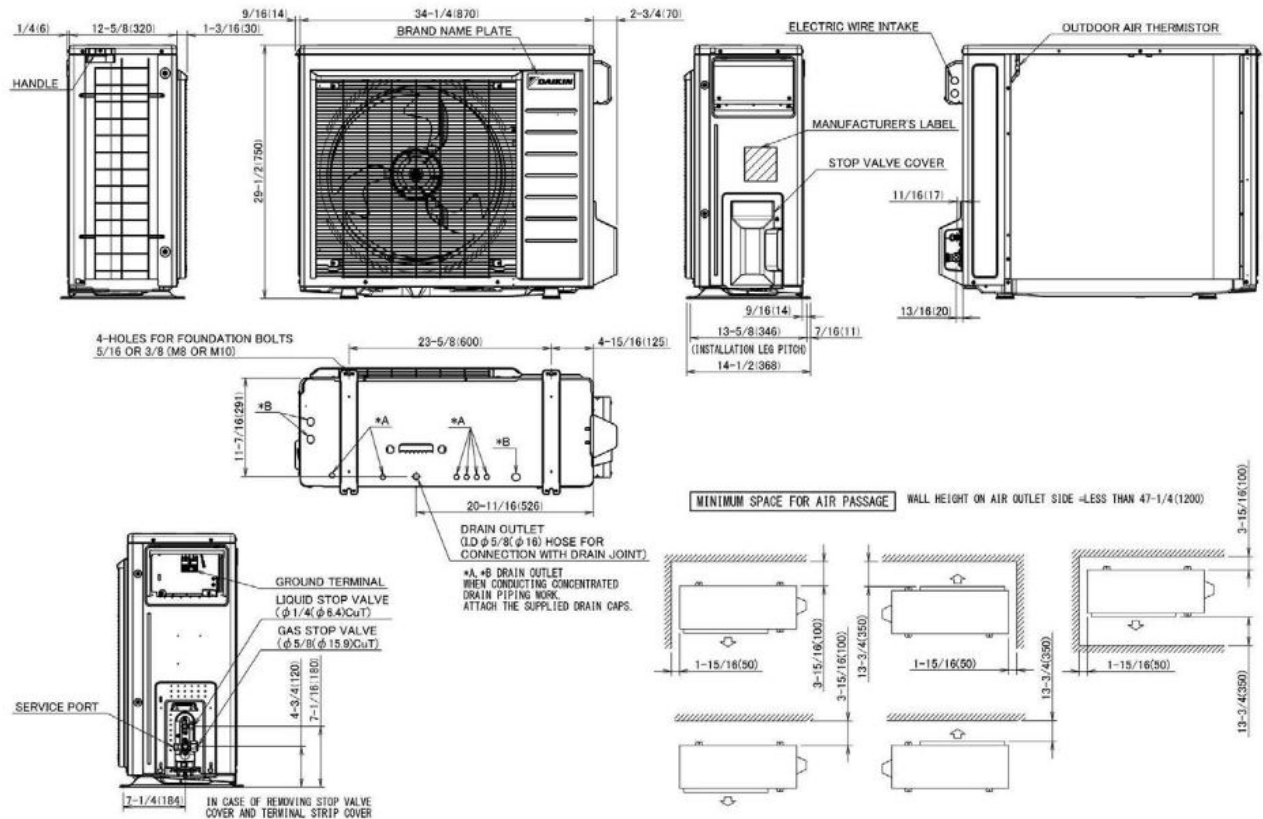



Submittal Data Sheet

R-32 2 Ton Wall Mounted Daikin OTERRA Cooling only System

FTKF24BVJU9-RKF24BVJU9

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)	No
AZAI6WSPDKC	DKN Plus Interface	No
BRC073A6	Wired Remote Controller (Requires Additional Wire Harness)	No
BRC944B2	Wired Remote Controller	No
BRCW901A03	BRC944B2 CONTROL CABLE, 10FT	No
BRCW901A08	Wired Remote Controller Cord - 8m/26ft	No
DCS301C71	Unified On/Off Controller	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	Yes
KKF936A4	LP CONVERSION KIT	No
KRP067A41	Adaptor for wired controller	No
KRP067A41E	Adaptor for wired remote controller	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KEH064A41	Drain Pan Heater	No
KKG063A44	Back Protection Wire Net	No



Submittal Data Sheet
R-32 2 Ton Wall Mounted Daikin OTERRA Cooling only System
FTKF24BVJU9-RKF24BVJU9

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KKP937A4	Drain Plug for OD Unit	Yes
KPS063A41	Snow hood (intake side plate) (15, 18 & 24)	No
KPS063A44	Snow hood (intake rear plate) (15,18 & 24)	No
KPS063A47	Snow hood (outlet) (15, 18 & 24)	No
KPW063B4	Air direction adjustment grille	No