

FIT¹

UP TO 19 SEER2
2, 3, 4 AND 5 TONS

HIGH-EFFICIENCY, COMMUNICATING,
VARIABLE-SPEED, INVERTER DRIVEN
R-32 SPLIT SYSTEM AIR CONDITIONER

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Performance Data	
Standard Mode	12
Boost Mode	13
Sound Power Levels	14
Sound Data Pressure	15
AHRI Ratings (see note).....	16
Wiring Diagram	17
Dimensions	20
Accessories	23



R32

Standard Features

- Daikin variable-speed swing compressors
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Daikin *One+* smart thermostat and other Daikin communicating equipment
- Daikin control algorithmic logic
- In communicating mode, only two low-voltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Daikin Inside intelligence for diagnostics
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion-resistant (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California, Florida, or Québec. The duration of warranty coverages in Texas and Florida differs in some cases. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions. Additional requirements for annual maintenance are required for the 12-Year Unit Replacement Limited Warranty. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

	D	C	9	V	S	A	36	1	0	A	A	
	1	2	3	4	5	6	7,8	9	10	11	12	
Brand D - Daikin												Minor Revisions A: Initial Release B: 1st Revision
Type - Split System C - Condenser R-32 H - Heat Pump R-32												Major Revisions A: Initial Release B: 1st Revision
Efficiency (SEER2) Nominal 13.4 - 13.7 = 3 13.8 - 14.5 = 4 14.6 - 15.5 = 5 16.0 - 16.9 = 6 17.0 - 17.9 = 7 18.0 - 18.9 = 8 19.0+ = 9												Variation
Compressor Type S - Single Stage T - Two Stage												Electrical 1 208/230 V, 1 Phase, 60 Hz
Feature Q - Introductory E - Enhanced												Nominal Capacity 18 - 1½ tons 24 - 2 tons 30 - 2½ tons
C - Communicating (Top Flow) S - Side Discharge Communicating												Sales Region N - North A - All Regions S - Southeast & North

	DC9VSA 2410A*	DC9VSA 3610A*	DC9VSA 4810A*	DC9VSA 6010A*
CAPACITIES (AHRI RATED)				
Max. Cooling (BTU/h)	23,200	35,000	46,500	57,000
AMBIENT OPERATION RANGE				
Cooling (°FDB(°CDB))	0 to 115 (-17.8 to 46.1)			
COMPRESSOR				
Type	Swing	Swing	Swing	Swing
CONDENSER FAN MOTOR				
Horsepower	0.20	0.36	0.36	2 x 0.32
REFRIGERATION SYSTEM				
Refrigerant Line Size ¹				
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size				
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing
Refrigerant Charge (oz.)	76	100	118	162
Expansion Device	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control
Subcooling at Service Valve	14±1°F	8±1°F	9±1°F	11±1°F
ELECTRICAL DATA				
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1
Fan/Compressor Inverter Drive Input	17.6	25.4	30	24.5
Minimum Circuit Ampacity ²	22.4	31.8	37.5	34.4
Max. Overcurrent Protection ³	25	35	40	40
Min / Max Volts	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	129	163	174	236
SHIP WEIGHT (LBS)	143	183	196	271

¹ Tested and rated in accordance with AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

(See table below for allowable line set diameter)

UNIT TONS	ALLOWABLE LINE SET DIAMETER						
	LIQUID			SUCTION			
	1/4"	5/16"	3/8"	3/8"	3/4"	7/8"	1 1/8"
2.0		X	X	X	X ^{*1}	X	
3.0			X	X		X	X
4.0			X	X		X	X
5.0			X			X	X

x Allowable combination

*1: For marked combinations, if normal ambient operation temperature is less than 14°F, limit line set length to 50 ft. max.

OUTDOOR UNIT	DC9VS*481*A* / DC9VS*601*A*	TRIM MORE THAN 5% SETTINGS ARE INVALID. TRIMMED UP CFM MAKES MISS MATCHING ERROR.
INDOOR UNIT	D*96TC0804C	
	D*97MC0804C D*80TC0804C	

EXPANDED COOLING DATA — DC9VSA2410A* / DFVE36CP1300A* (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				ENTERING INDOOR WET BULB TEMPERATURE											
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	25.4	25.7	26.5	27.6	24.5	24.9	25.6	26.7	23.3	23.6	24.3	25.4	21.6	21.9	22.6	23.7	19.8	20.1	20.8	21.8	18.1	18.4	19.1	20.1
	S/T	0.83	0.75	0.62	0.48	0.99	0.76	0.63	0.49	1.00	0.79	0.66	0.52	1.00	0.82	0.68	0.54	1.01	0.84	0.71	0.56	1.01	1.01	0.76	0.62
	ΔT	29	27	24	20	28	26	23	19	27	26	22	19	26	24	21	18	25	23	20	17	25	23	21	17
	kW	1.54	1.54	1.53	1.55	1.71	1.71	1.71	1.72	1.90	1.90	1.90	1.91	2.10	2.10	2.10	2.11	2.32	2.32	2.32	2.33	2.58	2.58	2.58	2.59
	Amps	5.5	5.5	5.5	5.5	6.2	6.2	6.2	6.2	6.9	6.9	6.9	7.0	7.7	7.7	7.7	7.7	8.5	8.5	8.5	8.5	9.5	9.4	9.4	9.5
	Hi PR	261	262	264	269	302	304	305	310	346	347	348	353	392	393	395	400	442	443	445	450	496	497	499	503
	Lo PR	120	124	130	142	126	130	137	148	131	135	142	153	135	139	146	158	139	142	150	162	144	147	155	167
	MBh	25.8	26.1	26.9	28.0	24.9	25.2	26.0	27.1	23.6	24.0	24.7	25.8	22.0	22.3	23.2	24.1	20.1	20.4	21.1	22.2	18.5	18.8	19.4	20.4
	S/T	0.90	0.83	0.70	0.56	0.99	0.84	0.71	0.56	1.00	0.87	0.73	0.59	1.00	0.89	0.75	0.61	1.01	0.92	0.78	0.64	1.01	1.01	0.84	0.69
	ΔT	28	26	22	19	27	25	22	18	26	24	21	18	25	23	21	17	24	22	19	16	24	22	19	16

85	MBh	25.8	26.2	26.9	28.1	24.9	25.3	26.0	27.1	23.7	24.0	24.7	25.8	22.0	22.3	23.0	24.1	20.2	20.5	21.2	22.2	18.5	18.8	19.5	20.5
	S/T	0.99	0.85	0.72	0.58	0.99	0.86	0.73	0.59	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.01	1.01	0.81	0.66	1.01	1.01	0.86	0.72
	ΔT	33	31	27	24	32	30	26	23	31	29	26	22	30	28	25	21	28	27	24	20	28	27	24	21
	kW	1.54	1.54	1.54	1.55	1.71	1.71	1.71	1.72	1.90	1.90	1.90	1.91	2.11	2.10	2.10	2.12	2.33	2.33	2.32	2.34	2.58	2.58	2.58	2.59
	Amps	5.5	5.5	5.5	5.6	6.2	6.2	6.2	6.2	6.9	6.9	6.9	7.0	7.7	7.7	7.7	7.7	8.5	8.5	8.5	8.6	9.5	9.5	9.4	9.5
	Hi PR	262	264	265	270	304	305	307	311	347	348	350	354	393	394	396	401	443	444	446	451	497	498	500	504
	Lo PR	122	125	132	144	128	131	138	150	133	136	144	155	137	140	148	160	141	144	151	163	146	149	157	169
	MBh	26.2	26.5	27.3	28.5	25.3	25.7	26.4	27.5	24.0	24.4	25.1	26.2	22.4	22.7	23.4	24.5	20.5	20.8	21.5	22.5	18.8	19.1	19.8	20.8
	S/T	0.99	0.93	0.80	0.65	0.99	0.94	0.81	0.66	1.00	1.00	0.83	0.69	1.00	1.00	0.86	0.71	1.01	1.01	0.88	0.74	1.01	1.01	1.01	0.80
	ΔT	31	30	26	22	30	29	25	22	30	28	25	21	28	27	23	20	27	25	22	19	27	25	22	19

iDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Airflow may vary depending on actual ambient conditions and system operation modes.

Shaded area is AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp + fan)

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		ENTERING INDOOR WET BULB TEMPERATURE																								
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70		MBh	40.3	40.8	42.0		38.5	39.0	40.2		36.1	36.6	37.7		33.1	33.6	34.6		29.8	30.3	31.4		26.9	27.4	28.4	
		S/T	0.61	0.53	0.39		0.62	0.54	0.40		0.64	0.56	0.42		0.66	0.59	0.45		0.69	0.61	0.47		0.74	0.66	0.52	
		ΔT	23	21	17		22	20	17		22	20	16		21	19	15		20	18	14		20	18	15	
	1070	kW	2.22	2.22	2.22		2.52	2.52	2.51		2.85	2.85	2.84		3.21	3.21	3.20		3.62	3.61	3.61		4.09	4.09	4.08	
		Amps	6.2	6.2	6.1		7.7	7.7	7.7		9.7	9.6	9.6		12.0	12.0	12.0		15.0	15.0	15.0		18.7	18.7	18.6	
		Hi PR	207	207	209		256	257	259		313	314	316		378	379	380		451	452	454		534	536	538	
		Lo PR	125	131	140		128	135	144		131	137	146		132	138	147		132	139	148		134	140	149	
		MBh	40.9	41.5	42.7		39.1	39.6	40.8		36.7	37.2	38.3		33.6	34.1	35.2		30.4	30.9	31.9		27.4	27.9	28.9	
		S/T	0.69	0.61	0.47		0.70	0.62	0.48		0.72	0.64	0.50		0.74	0.66	0.52		0.77	0.69	0.55		0.82	0.74	0.60	
		ΔT	22	20	16		21	19	15		20	18	15		19	17	14		18	17	13		19	17	14	
1260		kW	2.24	2.24	2.24		2.54	2.54	2.53		2.87	2.87	2.86		3.23	3.23	3.22		3.63	3.63	3.63		4.11	4.11	4.10	
		Amps	6.2	6.2	6.2		7.8	7.8	7.7		9.7	9.7	9.7		12.1	12.1	12.1		15.1	15.1	15.0		18.8	18.7	18.7	
		Hi PR	209	210	211		259	260	261		315	316	318		380	381	383		454	455	457		537	539	541	
		Lo PR	127	133	142		130	137	146		133	139	148		134	140	149		134	141	150		136	142	151	
		MBh	41.7	42.2	43.4		39.8	40.4	41.5		37.4	37.9	39.0		34.3	34.8	35.9		31.0	31.5	32.6		28.1	28.5	29.5	
		S/T	0.73	0.65	0.51		0.73	0.66	0.52		0.76	0.68	0.54		0.78	0.70	0.56		0.81	0.73	0.59		0.86	0.78	0.64	
		ΔT	20	18	14		20	18	14		19	17	14		18	16	13		17	15	12		18	16	13	
	1450		kW	2.26	2.25	2.25		2.55	2.55	2.55		2.88	2.88	2.88		3.25	3.24	3.24		3.65	3.65	3.64		4.13	4.12	4.12
			Amps	6.2	6.2	6.2		7.8	7.8	7.8		9.8	9.8	9.7		12.2	12.2	12.1		15.1	15.1	15.1		18.8	18.8	18.8
			Hi PR	211	212	213		261	262	264		318	319	320		383	384	386		457	458	460		540	541	543
		Lo PR	129	136	145		133	140	149		135	142	151		136	143	152		136	143	152		138	144	153	

75	MBh	40.3	40.9	42.1	43.9	38.5	39.0	40.2	42.0	36.1	36.6	37.7	39.4	33.1	33.6	34.7	36.3	29.9	30.3	31.4	33.0	26.9	27.4	28.4	29.9
	S/T	0.74	0.66	0.52	0.38	0.75	0.67	0.53	0.38	0.78	0.70	0.56	0.41	0.80	0.72	0.58	0.43	0.82	0.74	0.60	0.45	1.00	0.80	0.66	0.51
	ΔT	28	26	22	18	27	25	21	17	26	24	21	17	25	23	20	16	24	22	19	15	24	22	19	15
	kW	2.22	2.22	2.22	2.24	2.52	2.52	2.51	2.53	2.85	2.85	2.84	2.86	3.21	3.21	3.20	3.22	3.61	3.61	3.61	3.63	4.09	4.09	4.08	4.11
	Amps	6.2	6.2	6.1	6.2	7.7	7.7	7.7	7.8	9.6	9.6	9.6	9.7	12.0	12.0	12.0	12.1	15.0	15.0	14.9	15.0	18.7	18.6	18.6	18.7
	Hi PR	207	208	209	213	257	258	259	263	313	314	316	320	378	379	381	385	452	453	455	459	535	536	538	543
	Lo PR	125	131	140	152	128	135	144	156	131	137	146	158	132	138	147	159	132	139	148	159	134	140	149	160
	MBh	40.9	41.5	42.7	44.5	39.1	39.7	40.8	42.6	36.7	37.2	38.3	40.0	33.6	34.1	35.2	36.9	30.4	30.9	31.9	33.5	27.5	27.9	28.9	28.9
	S/T	0.82	0.74	0.60	0.46	0.83	0.75	0.61	0.46	0.86	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	0.88	0.73	0.60
	ΔT	26	24	20	16	25	23	20	16	25	23	19	15	24	22	18	14	22	21	17	14	23	21	18	14

IDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Airflow may vary depending on actual ambient conditions and system operation modes.

Shaded area is ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DC9VSA3610A* / DFVE48DP1300A* (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																												
		65°F				75°F				85°F				95°F								105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1070	MBh	40.5	41.1	42.3	44.1	38.7	39.3	40.4	42.2	36.3	36.8	37.9	39.6	33.3	33.8	34.9	36.5	30.0	30.5	31.6	33.1	27.1	27.6	28.6	30.1	27.1	27.6	28.6	30.1
		S/T	0.99	0.79	0.65	0.51	0.99	0.80	0.66	0.51	1.00	0.83	0.69	0.54	1.00	0.85	0.71	0.56	1.00	0.87	0.73	0.58	1.00	0.93	0.79	0.64	1.00	0.93	0.79	0.64
		ΔT	33	30	27	22	31	29	26	22	31	29	25	21	29	27	24	20	28	26	23	19	28	26	23	19	28	26	23	19
		kW	2.22	2.22	2.22	2.24	2.52	2.52	2.51	2.53	2.85	2.85	2.84	2.87	3.21	3.21	3.20	3.23	3.62	3.61	3.61	3.63	4.09	4.09	4.08	4.11	4.09	4.09	4.08	4.11
		Amps	6.2	6.2	6.1	6.2	7.7	7.7	7.7	7.8	9.7	9.6	9.6	9.7	12.0	12.0	12.0	12.1	15.0	15.0	14.9	15.0	18.7	18.7	18.6	18.7	18.7	18.7	18.6	18.7
		Hi PR	207	208	209	213	257	258	260	263	314	315	316	320	378	379	381	386	452	453	455	460	535	536	538	543	535	536	538	543
	Lo PR	125	132	140	152	129	135	144	156	131	138	147	158	132	139	148	159	133	139	148	160	134	141	150	161	134	141	150	161	
	1260	MBh	41.1	41.7	42.9	44.7	39.3	39.9	41.0	42.8	36.9	37.4	38.5	40.2	33.8	34.3	35.0	37.1	30.6	31.1	32.1	33.7	27.6	28.1	29.1	29.0	27.6	28.1	29.1	29.0
		S/T	0.99	0.87	0.73	0.58	0.99	0.88	0.74	0.59	1.00	0.91	0.77	0.62	1.00	0.93	0.79	0.64	1.00	0.95	0.81	0.66	1.00	1.00	0.87	0.74	1.00	1.00	0.87	0.74
		ΔT	31	29	25	21	30	28	24	20	29	27	23	20	28	26	22	19	26	25	21	18	27	25	21	18	27	25	21	18
kW		2.24	2.24	2.23	2.26	2.54	2.54	2.53	2.55	2.87	2.87	2.86	2.88	3.23	3.23	3.23	3.33	3.24	3.63	3.63	3.63	3.65	4.11	4.11	4.10	2.76	4.11	4.11	4.10	2.76
1450	Amps	6.2	6.2	6.2	6.2	7.8	7.8	7.7	7.8	9.7	9.7	9.7	9.8	12.1	12.1	13.4	12.2	15.1	15.1	15.0	15.1	18.8	18.7	18.7	11.9	18.8	18.7	18.7	11.9	
	Hi PR	209	210	212	215	259	260	262	266	316	317	319	323	381	382	397	388	455	456	458	462	538	539	541	540	538	539	541	540	
	Lo PR	127	134	143	155	131	138	147	159	133	140	149	161	134	141	152	162	135	141	150	162	136	143	152	165	136	143	152	165	
	MBh	41.9	42.5	43.7	45.5	40.1	40.6	41.8	43.5	37.6	38.1	39.2	40.9	34.5	35.0	36.1	37.7	31.2	31.7	32.8	34.3	28.3	28.7	28.2	29.7	28.3	28.7	28.2	29.7	
	S/T	0.99	0.91	0.77	0.62	0.99	0.92	0.78	0.63	1.00	0.95	0.81	0.66	1.00	0.97	0.83	0.68	1.00	0.99	0.85	0.70	1.00	1.00	0.93	0.78	1.00	1.00	0.93	0.78	
	ΔT	30	28	24	20	29	27	23	19	28	26	22	18	27	25	21	17	25	24	20	17	25	24	20	17	25	24	20	17	

85	MBh	41.2	41.8	43.0	44.8	39.4	39.9	41.1	42.8	36.9	37.4	38.6	40.3	33.9	34.4	35.5	37.1	30.6	31.1	32.1	33.7	27.7	28.1	29.1	29.1	27.7	28.1	29.1	29.1
	S/T	0.99	0.90	0.76	0.61	0.99	0.99	0.77	0.62	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.84	0.69	1.00	1.00	0.89	0.77	1.00	1.00	0.89	0.77
	ΔT	37	35	31	27	35	33	30	26	34	33	29	25	33	31	27	24	31	30	26	23	31	30	26	22	31	30	26	22
	kW	2.23	2.23	2.22	2.24	2.52	2.52	2.52	2.54	2.86	2.85	2.85	2.87	3.22	3.21	3.21	3.23	3.62	3.62	3.61	3.64	4.10	4.10	4.09	2.75	4.10	4.10	4.09	2.75
	Amps	6.2	6.2	6.2	6.2	7.7	7.7	7.7	7.8	9.7	9.7	9.6	9.7	12.1	12.0	12.0	12.1	15.0	15.0	15.0	15.1	18.7	18.7	18.7	11.8	18.7	18.7	18.7	11.8
	Hi PR	208	209	210	214	258	259	261	265	315	316	317	322	380	381	382	387	453	454	456	461	537	538	540	538	537	538	540	538
	Lo PR	127	134	142	154	131	137	146	158	133	140	149	160	134	141	149	161	134	141	150	162	136	143	151	165	136	143	151	165
	MBh	41.8	42.4	43.6	45.4	40.0	40.5	41.7	43.4	37.5	38.0	39.1	40.9	34.4	34.9	36.0	37.7	31.2	31.6	32.7	34.3	28.2	28.7	29.6	29.6	28.2	28.7	29.6	29.6
	S/T	0.99	0.99	0.84	0.69	0.99	0.99	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.77	1.00	1.00	0.97	0.85	1.00	1.00	0.97	0.85
	ΔT	30	29	25	22	30	28	25	21	29	28	24	21	28	27	23	20	28	26	23	19	28	26	23	20	28	26	23	20
	kW	2.25	2.25	2.24	2.26	2.54	2.54	2.54	2.56	2.87	2.87	2.87	2.89	3.24	3.23	3.23	3.25	3.64	3.64	3.63	3.66	4.12	4.11	4.11	2.76	4.12	4.11	4.11	2.76

iDB = Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Airflow may vary depending on actual ambient conditions and system operation modes.

Shaded area is AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	26.7	40.2	51.5		35.1	48.8	50.2		46.0	46.7	48.1		43.1	43.8	45.2		39.8	40.5	41.9		32.5	33.1	34.3	
	S/T	0.65	0.51	0.36		0.60	0.49	0.36		0.59	0.51	0.39		0.60	0.53	0.40		0.63	0.55	0.43		0.69	0.61	0.48	
	ΔT	21	21	16		22	19	15		21	19	15		20	18	15		20	18	14		22	20	16	
	kW	1.48	2.28	3.26		2.27	3.69	3.69		4.17	4.16	4.15		4.67	4.67	4.66		5.23	5.22	5.22		4.98	4.98	4.97	
	Amps	6.0	9.1	12.8		9.1	14.4	14.4		16.2	16.2	16.2		18.2	18.1	18.1		20.3	20.3	20.3		19.3	19.3	19.3	
	Hi PR	257	270	285		307	328	330		374	375	377		424	425	427		478	480	481		522	524	526	
	Lo PR	119	119	124		120	122	130		119	127	135		123	130	139		126	134	143		132	139	149	
	MBh	28.9	44.3	52.3		39.2	49.5	51.0		46.8	47.4	48.9		43.8	44.5	45.9		40.6	41.2	42.6		33.1	33.7	34.9	
	S/T	0.70	0.57	0.43		0.66	0.56	0.43		0.66	0.59	0.46		0.68	0.60	0.48		0.70	0.62	0.50		0.76	0.69	0.56	
	ΔT	20	19	14		21	18	14		19	18	14		19	17	14		18	16	13		21	19	15	
1380	kW	1.59	2.56	3.29		2.57	3.72	3.71		4.19	4.19	4.18		4.70	4.69	4.69		5.25	5.25	5.24		5.01	5.00	5.00	
	Amps	6.5	10.2	12.9		10.2	14.5	14.5		16.3	16.3	16.3		18.3	18.3	18.2		20.4	20.4	20.4		19.4	19.4	19.4	
	Hi PR	261	277	288		314	331	333		377	378	380		427	428	430		481	482	484		525	526	528	
	Lo PR	120	120	127		120	124	133		121	129	137		125	132	141		128	136	145		133	141	151	
	MBh	33.3	51.7	53.2		45.5	50.4	51.9		47.7	48.4	49.8		44.8	45.4	46.8		41.4	42.1	43.5		33.9	34.5	35.7	
	S/T	0.71	0.59	0.46		0.68	0.60	0.47		0.69	0.62	0.49		0.71	0.64	0.51		0.73	0.66	0.53		0.80	0.72	0.59	
	ΔT	19	17	13		20	16	13		18	16	13		18	16	12		17	15	12		19	17	14	
	kW	1.81	3.32	3.31		3.09	3.74	3.74		4.22	4.21	4.21		4.72	4.72	4.71		5.28	5.27	5.27		5.03	5.02	5.02	
	Amps	7.4	13.0	13.0		12.1	14.6	14.6		16.4	16.4	16.4		18.4	18.3	18.3		20.5	20.5	20.5		19.5	19.5	19.4	
	Hi PR	267	289	291		324	334	336		379	381	383		430	431	433		484	485	487		528	529	531	
	Lo PR	120	120	129		119	126	135		123	131	140		127	135	144		130	138	147		135	144	153	

75	MBh	26.7	40.2	51.5	53.8	35.1	48.8	50.2	52.5	46.0	46.7	48.1	50.3	43.1	43.8	45.2	47.4	39.9	40.5	41.9	44.0	32.5	33.1	34.3	36.1
	S/T	0.79	0.64	0.48	0.34	0.73	0.61	0.48	0.35	0.71	0.64	0.51	0.37	0.73	0.65	0.53	0.39	0.75	0.68	0.55	0.41	0.81	0.74	0.61	0.47
	ΔT	25	25	20	16	26	23	20	16	25	23	20	16	24	22	19	15	24	22	18	15	26	24	21	17
	kW	1.48	2.27	3.26	3.29	2.27	3.69	3.68	3.72	4.16	4.16	4.15	4.19	4.67	4.66	4.65	4.69	5.22	5.22	5.21	5.25	4.98	4.98	4.97	5.00
	Amps	6.0	9.1	12.8	12.9	9.1	14.4	14.4	14.5	16.2	16.2	16.2	16.3	18.1	18.1	18.1	18.2	20.3	20.3	20.3	20.4	19.3	19.3	19.3	19.4
	Hi PR	257	270	286	291	308	328	330	335	374	375	377	382	424	425	427	432	479	480	482	487	523	524	526	531
	Lo PR	119	119	124	135	120	122	130	141	119	127	135	146	123	130	139	150	126	134	143	154	132	139	149	160
	MBh	28.9	44.3	52.3	54.5	39.2	49.5	51.0	53.2	46.8	47.5	48.9	51.1	43.9	44.5	45.9	48.1	40.6	41.2	42.6	44.7	33.1	33.7	34.9	36.7
	S/T	0.84	0.70	0.55	0.41	0.79	0.68	0.56	0.42	0.78	0.71	0.58	0.44	0.80	0.73	0.60	0.46	0.82	0.75	0.62	0.48	1.00	0.81	0.68	0.54
	ΔT	24	24	19	15	25	22	18	15	24	22	18	15	23	21	18	14	22	20	17	14	25	23	19	16
1380	kW	1.58	2.56	3.29	3.32	2.57	3.72	3.71	3.75	4.19	4.19	4.18	4.21	4.69	4.69	4.68	4.72	5.25	5.25	5.24	5.27	5.00	5.00	5.00	5.02
	Amps	6.5	10.2	12.9	13.0	10.2	14.5	14.5	14.6	16.3	16.3	16.3	16.4	18.3	18.2	18.3	18.3	20.4	20.4	20.4	20.5	19.4	19.4	19.4	19.5
	Hi PR	261	278	289	294	314	331	333	338	377	378	380	385	427	428	430	435	481	483	485	490	526	527	529	533
	Lo PR	120	120	127	137	120	124	133	143	121	129	137	148	125	132	141	152	128	136	145	156	133	141	151	162
	MBh	33.3	51.8	53.2	55.5	45.6	50.5	51.9	54.1	47.7	48.4	49.8	52.0	44.8	45.4	46.8	49.0	41.5	42.1	43.5	45.6	33.9	34.5	35.7	37.5
	S/T	0.84	0.71	0.59	0.45	0.81	0.72	0.59	0.46	0.81	0.74	0.61	0.48	0.83	0.76	0.63	0.50	0.85	0.78	0.65	0.52	1.00	0.85	0.72	0.58
	ΔT	24	21	17	14	24	21	17	13	22	21	17	13	22	20	16	13	21	19	16	12	24	22	18	14
	kW	1.81	3.32	3.31	3.35	3.09	3.74	3.73	3.77	4.21	4.21	4.20	4.24	4.72	4.71	4.71	4.74	5.27	5.27	5.26	5.30	5.02	5.02	5.01	5.04
	Amps	7.4	13.0	13.0	13.1	12.1	14.6	14.6	14.7	16.4	16.4	16.4	16.5	18.3	18.3	18.3	18.4	20.5	20.5	20.5	20.6	19.5	19.5	19.4	19.5
	Hi PR	267	289	291	296	324	334	336	341	380	381	383	388	430	431	433	438	484	485	487	492	528	529	531	536
	Lo PR	120	120	129	140	120	126	135	146	123	131	140	151	127	135	144	155	130	138	147	159	135	144	153	165

IDB = Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Airflow may vary depending on actual ambient conditions and system operation modes.

Shaded area is ACCA (TVA) conditions

kW = Total system power

Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DC9VSA4810A* / DFVE60DP1300A* (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	26.9	40.4	51.8	54.0	36.6	49.0	50.5	52.7	46.3	47.0	48.4	50.6	43.4	44.1	45.5	47.6	40.1	40.8	42.1	44.2	32.7	33.3	34.5	36.3	32.7	33.3	34.5	36.3	32.7	33.3	34.5	36.3	32.7	33.3	34.5	36.3
	S/T	0.92	0.76	0.60	0.46	0.84	0.73	0.60	0.47	0.83	0.75	0.63	0.49	1.00	0.77	0.64	0.51	1.00	0.79	0.67	0.53	1.00	0.86	0.73	0.59	1.00	0.86	0.73	0.59	1.00	0.86	0.73	0.59	1.00	0.86	0.73	0.59
	ΔT	29	30	24	21	31	28	24	20	29	27	24	20	28	27	23	20	28	26	22	19	31	29	25	21	31	29	25	21	31	29	25	21	31	29	25	21
	kW	1.48	2.28	3.26	3.30	2.37	3.69	3.69	3.72	4.17	4.16	4.15	4.19	4.67	4.66	4.66	4.69	5.23	5.22	5.22	5.25	4.98	4.98	4.98	5.00	4.98	4.98	4.98	4.97	5.00	4.98	4.98	4.97	5.00	4.98	4.97	5.00
	Amps	6.0	9.1	12.8	12.9	9.5	14.4	14.4	14.5	16.2	16.2	16.2	16.3	18.2	18.1	18.1	18.2	20.3	20.3	20.3	20.4	19.3	19.3	19.3	19.4	19.3	19.3	19.3	19.3	19.4	19.3	19.3	19.3	19.3	19.3	19.4	19.3
	Hi PR	258	271	286	291	310	329	331	336	374	376	378	383	425	426	426	433	479	480	482	487	523	524	526	531	523	524	526	531	523	524	526	531	523	524	526	531
	Lo PR	120	120	125	136	119	122	131	142	120	127	136	147	123	131	140	151	132	134	143	155	132	140	149	161	132	140	149	161	132	140	149	161	132	140	149	161
	MBh	29.1	46.7	52.5	54.8	41.0	49.8	51.2	53.5	47.0	47.7	49.1	51.3	44.1	44.8	46.5	48.3	40.8	41.5	42.9	45.0	33.4	33.9	35.1	36.9	33.4	33.9	35.1	36.9	33.4	33.9	35.1	36.9	33.4	33.9	35.1	36.9
	S/T	0.97	0.81	0.67	0.53	0.90	0.80	0.67	0.54	0.90	0.83	0.70	0.56	1.00	0.84	0.72	0.58	1.00	0.86	0.74	0.60	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.66
	ΔT	29	29	23	19	30	26	22	19	28	26	22	19	27	25	22	18	26	24	21	18	29	27	24	20	29	27	24	20	29	27	24	20	29	27	24	20
	kW	1.59	2.73	3.29	3.32	2.71	3.72	3.71	3.75	4.19	4.19	4.18	4.22	4.70	4.69	4.65	4.72	5.25	5.25	5.24	5.28	5.01	5.00	5.00	5.02	5.01	5.00	5.00	5.02	5.01	5.00	5.00	5.02	5.01	5.00	5.02	5.01
	Amps	6.5	10.8	12.9	13.0	10.7	14.5	14.5	14.6	16.3	16.3	16.3	16.4	18.3	18.3	18.3	18.4	20.4	20.4	20.4	20.5	19.4	19.4	19.4	19.5	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.5	19.5
	Hi PR	262	280	289	294	317	332	334	339	377	379	381	385	428	429	428	436	482	483	485	490	526	527	529	534	526	527	529	534	526	527	529	534	526	527	529	534
	Lo PR	120	119	127	138	120	124	133	144	122	129	138	149	125	133	143	153	129	136	146	157	134	142	151	163	134	142	151	163	134	142	151	163	134	142	151	163
1590	MBh	35.7	52.0	53.5	55.7	50.0	50.7	52.2	54.4	48.0	48.6	50.1	52.2	45.0	45.7	47.1	49.2	41.7	42.4	43.7	45.8	34.1	34.7	35.9	37.7	34.1	34.7	35.9	37.7	34.1	34.7	35.9	37.7	34.1	34.7	35.9	37.7
	S/T	0.96	0.83	0.70	0.57	0.91	0.84	0.71	0.57	1.00	0.86	0.73	0.60	1.00	0.88	0.75	0.62	1.00	0.90	0.77	0.64	1.00	0.97	0.84	0.70	1.00	0.97	0.84	0.70	1.00	0.97	0.84	0.70	1.00	0.97	0.84	0.70
	ΔT	28	25	22	18	27	25	21	18	27	25	21	18	26	24	21	17	25	23	20	16	28	26	22	19	28	26	22	19	28	26	22	19	28	26	22	19
	kW	1.94	3.32	3.31	3.35	3.75	3.74	3.74	3.77	4.22	4.21	4.20	4.24	4.72	4.71	4.71	4.74	5.28	5.27	5.27	5.30	5.02	5.02	5.02	5.04	5.02	5.02	5.02	5.04	5.02	5.02	5.02	5.04	5.02	5.02	5.04	5.02
	Amps	7.9	13.0	13.0	13.1	14.6	14.6	14.6	14.7	16.4	16.4	16.4	16.5	18.4	18.3	18.3	18.4	20.5	20.5	20.5	20.6	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.4	19.5	19.5	19.5	19.5	19.5	19.5	19.5	
	Hi PR	270	290	292	297	333	335	337	341	380	381	383	388	430	432	434	439	485	486	488	493	529	530	532	537	529	530	532	537	529	530	532	537	529	530	532	537
	Lo PR	119	121	129	140	119	127	135	146	124	131	140	151	127	135	144	155	131	139	148	159	136	144	154	165	136	144	154	165	136	144	154	165	136	144	154	165
85	MBh	29.1	44.6	52.6	54.9	41.0	49.9	51.3	53.5	47.1	47.8	49.2	51.4	44.2	44.8	46.2	48.4	40.9	41.5	42.9	45.0	33.4	34.0	35.2	37.0	33.4	34.0	35.2	37.0	33.4	34.0	35.2	37.0	33.4	34.0	35.2	37.0
	S/T	1.00	0.85	0.69	0.56	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.59	1.00	0.87	0.74	0.61	1.00	1.00	0.76	0.63	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69
	ΔT	34	34	28	24	35	31	28	24	33	31	27	24	32	30	27	23	31	29	26	22	34	32	29	25	34	32	29	25	34	32	29	25	34	32	29	25
	kW	1.58	2.55	3.27	3.31	2.69	3.70	3.69	3.73	4.17	4.17	4.16	4.20	4.68	4.67	4.67	4.70	5.23	5.23	5.22	5.26	4.99	4.99	4.98	5.01	4.99	4.99	4.98	5.01	4.99	4.98	5.01	4.99	4.98	5.01	4.99	4.98
	Amps	6.4	10.1	12.8	12.9	10.7	14.4	14.4	14.6	16.3	16.2	16.2	16.3	18.2	18.2	18.1	18.3	20.3	20.3	20.3	20.4	19.3	19.3	19.3	19.4	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.3	19.4
	Hi PR	260	277	288	292	315	330	332	337	376	377	379	384	426	427	429	434	480	482	484	489	525	526	528	532	525	526	528	532	525	526	528	532	525	526	528	532
	Lo PR	120	120	127	137	119	124	133	144	121	129	138	149	125	133	142	153	128	136	145	156	134	142	151	162	134	142	151	162	134	142	151	162	134	142	151	162
	MBh	33.4	51.9	53.4	55.6	45.7	50.6	52.1	54.3	47.8	48.5	49.9	52.1	44.9	45.6	47.0	49.1	41.6	42.2	43.6	45.7	34.0	34.6	35.8	37.6	34.0	34.6	35.8	37.6	34.0	34.6	35.8	37.6	34.0	34.6	35.8	37.6
	S/T	1.00	0.89	0.76	0.63	1.00	0.90	0.77	0.63	1.00	0.92	0.79	0.66	1.00	0.94	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	0.90	0.76	1.00	1.00	0.90	0.76	1.00	1.00	0.90	0.76	1.00	1.00	0.90	0.76
	ΔT	33	30	27	23	34	30	26	23	31	30	26	22	31	29	25	22	30	28	25	21	33	31	27	24	33	31	27	24	33	31	27	24	33	31	27	24
	kW	1.80	3.31	3.30	3.33	3.08	3.73	3.72	3.76	4.20	4.20	4.19	4.22	4.70	4.70	4.69	4.73	5.26	5.26	5.25	5.28	5.01	5.01	5.00	5.03	5.01	5.01	5.00	5.03	5.01	5.00	5.03	5.01	5.00	5.03	5.01	5.00
	Amps	7.3	13.0	12.9	13.1	12.1	14.6	14.5	14.7	16.4	16.4	16.4	16.5	18.3	18.3	18.3	18.4	20.5	20.4	20.4	20.5	19.4	19.4	19.4	19.5	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.5	19.5
	Hi PR	267	288	290	295	323	333	335	340	379	380	382	387	429	430	432	437	483	485	486	491	527	529	530	535	527	529	530	535	527	529	530	535	527	529	530	535
	Lo PR	120	123	131	142	121	128	137	148	125	133	142	153	129	137	146	157	132	140	150	161	137	146	155	167	137	146	155	167	137	146	155	167	137	146	155	167
1590	MBh	39.5																																			

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	36.4	43.9	53.4		45.4	52.0	58.5		53.4	56.0	57.7		53.2	54.0	55.7		50.5	51.4	53.1		44.0	44.8	44.4		44.0	44.8	44.4		44.0	44.8	44.4					
	S/T	0.65	0.53	0.37		0.61	0.51	0.36		0.60	0.51	0.38		0.59	0.52	0.40		0.61	0.54	0.42		0.69	0.61	0.49		0.69	0.61	0.49		0.69	0.61	0.49					
	ΔT	20	19	16		21	19	16		22	20	16		21	20	16		21	19	15		21	19	16		21	19	16		21	19	16					
	kW	1.94	2.46	3.17		2.95	3.56	4.54		4.39	5.10	5.09		5.69	5.68	5.67		6.33	6.33	6.32		5.52	5.52	5.11		5.52	5.52	5.11		5.52	5.52	5.11					
	Amps	7.7	9.5	11.9		11.4	13.5	17.0		16.7	19.4	19.4		22.0	22.0	22.0		25.0	24.9	24.9		22.1	22.1	20.5		22.1	22.1	20.5		22.1	22.1	20.5					
	Hi PR	249	260	272		305	314	318		366	363	365		413	414	416		469	470	472		527	528	524		527	528	524		527	528	524					
	Lo PR	120	119	121		120	120	122		119	120	127		121	124	130		124	127	134		133	136	145		133	136	145		133	136	145					
70	MBh	40.6	46.7	59.8		49.8	55.9	59.4		56.6	56.8	58.6		54.1	54.9	56.6		51.4	52.3	54.0		42.9	43.6	45.2		42.9	43.6	45.2		42.9	43.6	45.2					
	S/T	0.71	0.60	0.44		0.67	0.58	0.43		0.66	0.58	0.45		0.66	0.59	0.47		0.68	0.61	0.49		0.77	0.69	0.56		0.77	0.69	0.56		0.77	0.69	0.56					
	ΔT	19	18	15		20	18	15		20	19	15		20	18	14		19	18	14		19	18	14		19	18	14		19	18	14					
	kW	2.22	2.66	3.81		3.34	3.94	4.57		4.80	5.13	5.12		5.72	5.72	5.71		6.37	6.36	6.35		5.15	5.14	5.14		5.15	5.14	5.14		5.15	5.14	5.14					
	Amps	8.7	10.1	14.1		12.7	14.8	17.1		18.3	19.5	19.5		22.2	22.1	22.1		25.1	25.1	25.0		20.6	20.6	20.6		20.6	20.6	20.6		20.6	20.6	20.6					
	Hi PR	258	265	282		313	322	321		373	366	368		416	417	419		472	473	475		524	525	527		524	525	527		524	525	527					
	Lo PR	120	120	119		120	120	124		120	122	129		122	126	132		126	129	136		136	140	147		136	140	147		136	140	147					
1890	MBh	44.8	51.3	60.3		53.0	58.8	60.5		57.1	58.0	59.7		55.2	56.0	57.7		52.6	53.4	55.2		43.9	44.6	42.8		43.9	44.6	42.8		43.9	44.6	42.8					
	S/T	0.73	0.63	0.46		0.70	0.59	0.47		0.68	0.61	0.49		0.70	0.63	0.50		0.72	0.65	0.52		0.81	0.73	0.61		0.81	0.73	0.61		0.81	0.73	0.61					
	ΔT	18	17	14		19	17	14		19	17	14		19	17	13		18	16	13		18	17	13		18	17	13		18	17	13					
	kW	2.50	3.01	4.10		3.61	4.61	4.60		5.16	5.16	5.15		5.75	5.74	5.73		6.39	6.39	6.38		5.17	5.16	4.57		5.17	5.16	4.57		5.17	5.16	4.57					
	Amps	9.6	11.3	15.1		13.7	17.2	17.2		19.7	19.6	19.6		22.3	22.3	22.2		25.2	25.2	25.2		20.7	20.7	18.3		20.7	20.7	18.3		20.7	20.7	18.3					
	Hi PR	264	273	279		319	321	323		368	369	371		419	420	422		475	476	478		526	528	521		526	528	521		526	528	521					
	Lo PR	120	120	121		121	120	126		121	124	131		124	128	134		128	131	138		138	142	152		138	142	152		138	142	152					

1390	MBh	36.4	43.9	53.4	60.9	45.5	52.0	58.5	61.1	53.4	56.0	57.7	60.3	53.2	54.0	55.8	58.4	50.6	51.4	53.2	55.8	44.1	44.8	44.4	46.8
	S/T	0.79	0.67	0.50	0.34	0.74	0.64	0.48	0.35	0.72	0.63	0.50	0.37	0.71	0.64	0.52	0.39	0.73	0.66	0.54	0.40	0.81	0.74	0.61	0.48
	ΔT	24	23	21	17	25	24	21	17	26	25	21	17	26	24	20	16	25	23	20	16	25	23	20	16
	kW	1.94	2.46	3.17	4.07	2.95	3.56	4.53	4.57	4.38	5.09	5.08	5.12	5.68	5.68	5.67	5.71	6.33	6.33	6.32	6.36	5.52	5.51	5.11	5.14
	Amps	7.6	9.5	11.9	15.0	11.4	13.5	16.9	17.1	16.7	19.4	19.3	19.5	22.0	22.0	22.0	22.1	24.9	24.9	24.9	25.1	22.1	22.1	20.5	20.6
	Hi PR	250	260	272	278	305	315	318	323	366	363	365	370	414	415	417	421	469	470	472	477	527	528	524	529
	Lo PR	120	119	121	126	120	120	122	132	119	121	127	137	121	124	130	140	124	127	134	144	133	136	145	156
1640	MBh	40.6	46.7	59.8	61.8	49.8	55.9	59.4	62.0	56.6	56.9	58.6	61.2	54.1	54.9	56.6	59.3	51.5	52.3	54.1	56.7	42.9	43.7	45.2	44.1
	S/T	0.84	0.73	0.56	0.41	0.80	0.70	0.55	0.42	0.79	0.70	0.57	0.44	0.78	0.71	0.59	0.46	0.80	0.73	0.60	0.47	0.99	0.82	0.69	0.56
	ΔT	23	22	19	16	24	23	19	15	25	23	19	15	24	22	19	15	24	22	18	14	23	22	18	14
	kW	2.22	2.66	3.81	4.11	3.34	3.94	4.57	4.61	4.80	5.13	5.12	5.16	5.72	5.71	5.70	5.74	6.36	6.36	6.35	6.39	5.15	5.14	5.14	4.57
	Amps	8.6	10.1	14.1	15.1	12.7	14.8	17.1	17.3	18.3	19.5	19.5	19.7	22.2	22.1	22.1	22.3	25.1	25.1	25.0	25.2	20.6	20.6	20.6	18.4
	Hi PR	258	266	282	281	313	322	321	326	373	366	368	373	416	418	420	424	472	473	475	480	524	525	527	523
	Lo PR	120	120	119	128	120	120	124	134	120	122	129	139	122	126	132	142	126	129	136	146	136	140	147	161
1890	MBh	44.8	51.3	60.3	62.9	53.1	58.8	60.5	63.1	57.2	58.0	59.7	62.3	55.2	56.0	57.8	60.4	52.6	53.4	55.2	57.9	43.9	44.7	42.9	45.0
	S/T	0.86	0.76	0.58	0.45	0.82	0.71	0.59	0.45	0.81	0.73	0.61	0.47	0.82	0.75	0.62	0.49	0.83	0.76	0.64	0.51	0.99	0.86	0.74	0.60
	ΔT	23	21	18	14	23	22	18	14	24	22	18	14	23	21	18	14	23	21	17	13	22	21	17	13
	kW	2.50	3.00	4.09	4.14	3.61	4.60	4.59	4.64	5.16	5.15	5.14	5.19	5.74	5.74	5.73	5.77	6.39	6.39	6.38	6.42	5.16	5.16	4.56	4.59
	Amps	9.6	11.3	15.1	15.2	13.7	17.2	17.2	17.4	19.7	19.6	19.6	19.8	22.3	22.2	22.2	22.4	25.2	25.2	25.1	25.3	20.7	20.7	18.3	18.4
	Hi PR	265	273	279	284	319	322	324	328	368	369	371	376	419	420	422	427	475	476	478	483	527	528	521	526
	Lo PR	120	120	121	130	121	120	126	136	121	125	131	141	125	128	134	144	128	131	138	148	138	142	152	163

EXPANDED COOLING DATA — DC9VSA6010A* / DFVE60DP1300A* (CONT.)

		OUTDOOR AMBIENT TEMPERATURE																															
		65°F				75°F				85°F				ENTERING INDOOR WET BULB TEMPERATURE								95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	MBh	39.2	44.1	56.8	61.2	45.7	52.3	58.8	61.4	53.7	56.3	58.0	60.6	53.5	54.3	56.1	58.7	50.9	51.7	53.5	56.1	44.3	45.1	44.7	43.6	44.3	45.1	44.7	43.6				
	S/T	0.90	0.80	0.62	0.46	0.86	0.76	0.60	0.46	0.84	0.75	0.62	0.49	0.83	0.76	0.63	0.50	0.99	0.78	0.65	0.52	0.99	0.86	0.74	0.61	0.99	0.86	0.74	0.61				
	ΔT	29	28	25	22	29	28	25	21	30	29	25	21	30	28	25	21	29	28	24	20	29	27	24	20	29	27	24	20				
	kW	2.13	2.46	3.48	4.08	2.95	3.56	4.53	4.58	4.39	5.09	5.09	5.13	5.69	5.68	5.67	5.71	6.33	6.33	6.32	6.36	5.52	5.52	5.11	4.55	5.52	5.52	5.11	4.55				
	Amps	8.3	9.5	12.9	15.0	11.4	13.5	17.0	17.1	16.7	19.4	19.4	19.5	22.0	22.0	22.0	22.1	24.9	24.9	24.9	25.1	22.1	22.1	20.5	18.3	22.1	22.1	20.5	18.3				
	Hi PR	254	261	277	279	306	315	319	323	366	364	366	371	414	415	417	422	470	471	473	478	527	528	525	521	527	528	525	521				
	Lo PR	119	120	119	127	121	121	123	132	120	121	127	137	121	124	131	141	124	128	134	144	133	137	145	159	133	137	145	159				
80	MBh	43.0	46.9	60.1	62.1	52.3	56.2	59.7	62.3	56.4	57.2	58.9	61.5	54.4	55.2	57.0	59.6	51.8	52.6	54.4	57.0	43.2	43.9	45.5	44.4	43.2	43.9	45.5	44.4				
	S/T	0.96	0.86	0.68	0.53	0.91	0.82	0.67	0.54	0.89	0.82	0.69	0.56	1.00	0.83	0.70	0.57	0.99	0.85	0.72	0.59	0.99	0.94	0.81	0.69	0.99	0.94	0.81	0.69				
	ΔT	28	26	24	20	29	27	24	20	29	27	24	20	29	27	23	19	28	26	22	19	28	26	22	18	28	26	22	18				
	kW	2.39	2.66	3.81	4.11	3.59	3.94	4.57	4.61	5.13	5.13	5.12	5.16	5.72	5.72	5.70	5.75	6.37	6.36	6.35	6.39	5.15	5.14	5.14	4.57	5.15	5.14	5.14	4.57				
	Amps	9.2	10.1	14.1	15.1	13.6	14.8	17.1	17.3	19.5	19.5	19.5	19.7	22.2	22.1	22.1	22.3	25.1	25.1	25.0	25.2	20.6	20.6	20.6	18.4	20.6	20.6	20.6	18.4				
	Hi PR	261	266	283	281	317	323	321	326	366	367	369	373	417	418	420	425	473	474	476	481	524	526	528	524	524	526	528	524				
	Lo PR	119	121	120	129	119	121	125	134	119	123	129	139	123	126	133	143	126	130	136	146	137	141	147	161	137	141	147	161				
1890	MBh	47.2	53.9	60.6	63.2	56.5	59.1	60.8	63.4	57.5	58.3	60.0	62.6	55.5	56.3	58.1	60.7	52.9	53.7	55.5	58.2	44.2	44.9	43.1	45.3	44.2	44.9	43.1	45.3				
	S/T	0.98	0.87	0.70	0.57	0.93	0.83	0.71	0.57	0.92	0.85	0.72	0.59	1.00	0.86	0.74	0.61	0.99	0.88	0.76	0.62	0.99	0.98	0.87	0.72	0.99	0.98	0.87	0.72				
	ΔT	27	26	23	19	28	26	23	19	28	26	23	19	28	26	22	18	27	25	21	18	26	25	21	17	26	25	21	17				
	kW	2.68	3.23	4.10	4.14	3.97	4.61	4.60	4.64	5.16	5.16	5.15	5.19	5.75	5.74	5.73	5.77	6.39	6.39	6.38	6.42	5.17	5.16	4.57	4.59	5.17	5.16	4.57	4.59				
	Amps	10.2	12.1	15.1	15.3	14.9	17.2	17.2	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.2	25.2	25.1	25.3	20.7	20.7	18.3	18.4	20.7	20.7	18.3	18.4				
	Hi PR	268	276	279	284	324	322	324	329	368	369	371	376	420	421	423	428	475	477	479	483	527	528	522	526	527	528	522	526				
	Lo PR	120	119	121	131	119	121	127	137	122	125	131	141	125	128	135	145	128	132	138	148	139	143	152	163	139	143	152	163				

1390	MBh	40.9	47.0	60.2	62.2	50.1	56.2	59.8	62.4	56.4	57.3	59.0	61.6	54.5	55.3	57.0	59.7	51.9	52.7	54.4	57.1	45.3	44.0	45.5	44.4
	S/T	1.00	0.89	0.71	0.56	1.00	0.85	0.69	0.56	1.00	0.84	0.71	0.58	1.00	0.85	0.73	0.60	0.99	0.87	0.74	0.61	0.99	0.99	0.83	0.71
	ΔT	33	32	29	26	34	32	29	25	35	33	29	25	34	32	28	25	33	31	28	24	33	31	27	23
	kW	2.21	2.64	3.79	4.09	3.33	3.92	4.54	4.59	5.11	5.10	5.10	5.14	5.70	5.69	5.68	5.72	6.34	6.34	6.33	6.37	5.53	5.13	5.12	4.56
	Amps	8.6	10.1	14.0	15.0	12.7	14.8	17.0	17.2	19.5	19.4	19.4	19.6	22.1	22.0	22.0	22.2	25.0	25.0	24.9	25.1	22.1	20.6	20.5	18.3
	Hi PR	257	265	281	280	312	321	320	325	364	365	367	372	415	417	418	423	471	472	474	479	529	524	526	522
1640	Lo PR	120	120	119	128	120	120	124	134	119	123	129	139	123	126	132	142	126	129	136	146	135	140	147	161
	MBh	44.9	51.4	60.5	63.0	53.2	59.0	60.7	63.3	57.3	58.1	59.9	62.5	55.4	56.2	57.9	60.6	52.8	53.6	55.4	58.0	44.1	44.8	46.3	45.2
	S/T	1.00	0.94	0.76	0.63	1.00	0.89	0.76	0.63	1.00	0.91	0.78	0.65	1.00	0.92	0.80	0.67	0.99	0.94	0.81	0.68	0.99	0.99	0.91	0.79
	ΔT	32	31	28	24	33	32	28	24	33	31	28	24	33	31	27	23	32	30	26	23	31	29	26	22
	kW	2.49	2.99	4.08	4.12	3.60	4.59	4.58	4.62	5.14	5.14	5.13	5.17	5.73	5.73	5.72	5.76	6.38	6.37	6.36	6.40	5.15	5.15	5.14	4.58
	Amps	9.6	11.3	15.0	15.2	13.7	17.2	17.1	17.3	19.6	19.6	19.5	19.7	22.2	22.2	22.1	22.3	25.1	25.1	25.1	25.2	20.7	20.7	20.6	18.4
1890	Hi PR	264	272	278	283	318	321	323	327	367	368	370	375	418	419	421	426	474	475	477	482	526	527	529	525
	Lo PR	120	120	121	130	121	120	126	136	121	124	131	141	124	128	134	144	128	131	138	148	138	142	149	163
	MBh	47.9	54.8	61.6	64.1	59.9	60.1	61.8	64.3	58.4	59.3	61.0	63.6	56.5	57.3	59.0	61.7	53.9	54.7	56.5	59.2	45.1	42.5	43.9	46.1
	S/T	1.00	0.97	0.80	0.66	1.00	0.93	0.80	0.67	1.00	0.95	0.82	0.69	1.00	0.96	0.83	0.70	0.99	0.97	0.85	0.72	0.99	0.99	0.97	0.82
	ΔT	31	30	27	23	32	30	27	23	32	30	26	23	31	29	26	22	31	29	25	21	30	28	24	21
	kW	2.69	3.23	4.11	4.15	4.33	4.62	4.61	4.65	5.17	5.17	5.16	5.20	5.76	5.75	5.74	5.78	6.40	6.40	6.39	6.43	5.17	4.58	4.57	4.60
1890	Amps	10.3	12.1	15.1	15.3	16.2	17.3	17.3	17.4	19.7	19.7	19.6	19.8	22.3	22.3	22.3	22.4	25.2	25.2	25.2	25.4	20.7	18.4	18.4	18.5
	Hi PR	269	277	281	285	329	323	325	330	370	371	373	377	421	422	424	429	477	478	480	485	528	521	523	528
	Lo PR	121	121	123	133	119	122	128	138	123	127	133	143	127	130	137	147	130	133	140	150	141	147	154	165

PERFORMANCE DATA FOR STANDARD OPERATING MODE

DC9VSA2410A* / DFVE36CP1300A* DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 13-15 °F - 100 % DEMAND				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	26,000	18,500	7,500	1,720
80°	25,400	18,300	7,100	1,815
85°	24,700	18,000	6,700	1,910
90°	24,000	17,700	6,300	2,010
95°	23,200	17,400	5,800	2,110
100°	22,200	17,000	5,200	2,220
105°	21,100	16,500	4,600	2,330
110°	20,300	16,400	3,900	2,460
115°	19,400	16,300	3,100	2,590
TVA Conditions @ 95° OD DB, 75° ID, 63° ID WB				
95°	22,200	17,100	5,100	2,110

DC9VSA3610A* / DFVE48DP1300A* DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 8-10 °F - 100 % DEMAND				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	41,000	30,300	10,700	2,530
80°	39,800	30,000	9,800	2,695
85°	38,500	29,600	8,900	2,860
90°	36,800	28,700	8,100	3,095
95°	35,000	27,700	7,300	3,330
100°	33,600	26,900	6,700	3,480
105°	32,100	26,000	6,100	3,630
110°	30,600	25,700	4,900	3,865
115°	29,100	25,300	3,800	4,100
TVA Conditions @ 95° OD DB, 75° ID, 63° ID WB				
95°	34,100	27,300	6,800	3,230

DC9VSA2410A* / DFVE36CP1300A* DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 13-15 °F - BOOST MODE				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	33,600	22,200	11,400	2,200
80°	32,800	22,100	10,700	2,300
85°	31,900	22,000	9,900	2,450
90°	30,800	21,600	9,200	2,600
95°	29,700	21,100	8,600	2,700
100°	28,500	20,700	7,800	2,900
105°	27,300	20,200	7,100	3,000
110°	26,200	20,000	6,200	3,200
115°	25,100	19,800	5,300	3,350
TVA Conditions @ 95° OD DB, 75° ID, 63° ID WB				
95°	28,700	20,700	8,000	2,700

DC9VSA3610A* / DFVE48DP1300A* DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 8-10 °F - BOOST MODE				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	59,100	38,400	20,700	3,600
80°	57,300	37,800	19,500	3,900
85°	55,500	37,200	18,300	4,150
90°	53,200	36,200	17,000	4,400
95°	50,900	35,100	15,800	4,700
100°	48,500	34,200	14,300	5,000
105°	46,100	33,200	12,900	5,350
110°	37,600	29,200	8,400	4,800
115°	29,000	25,200	3,800	4,200
TVA Conditions @ 95° OD DB, 75° ID, 63° ID WB				
95°	49,100	34,400	14,700	4,700

PERFORMANCE DATA FOR FIELD-SELECTABLE BOOST MODE (CONT.)

DC9VSA4810A* / DFVE60DP1300A*				
DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 8-10 °F - 100 % DEMAND				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	51,200	34,300	16,900	3,710
80°	50,200	34,400	15,800	3,945
85°	49,100	34,400	14,700	4,180
90°	47,800	34,000	13,800	4,415
95°	46,500	33,500	13,000	4,650
100°	44,700	32,600	12,100	4,945
105°	42,900	31,700	11,200	5,240
110°	39,000	29,900	9,100	5,120
115°	35,100	28,100	7,000	5,000
TVA CONDITIONS @ 95° OD DB, 75° ID, 63° ID WB				
95°	44,500	32,500	12,000	4,690

DC9VSA4810A* / DFVE60DP1300A*				
DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 8-10 °F - BOOST MODE				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	61,800	38,900	22,900	5,400
80°	61,200	38,900	22,300	5,850
85°	60,600	38,800	21,800	6,300
90°	58,800	38,300	20,500	6,800
95°	55,900	37,500	18,400	6,850
100°	50,100	35,800	14,300	6,250
105°	44,300	34,000	10,300	5,650
110°	39,700	31,000	8,700	5,300
115°	35,100	28,000	7,100	5,000
TVA CONDITIONS @ 95° OD DB, 75° ID, 63° ID WB				
95°	53,700	36,500	17,200	6,900

DC9VSA6010A* / DFVE60DP1300A*				
DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 15-17 °F - 100 % DEMAND				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	59,700	40,000	19,700	4,570
80°	59,300	40,300	19,000	4,845
85°	58,900	40,600	18,300	5,120
90°	58,000	40,300	17,700	5,410
95°	57,000	39,900	17,100	5,700
100°	55,700	39,600	16,100	6,025
105°	54,400	39,200	15,200	6,350
110°	50,000	38,100	11,900	5,745
115°	45,500	36,900	8,600	5,140
TVA CONDITIONS @ 95° OD DB, 75° ID, 63° ID WB				
95°	54,900	39,000	15,900	5,710

DC9VSA6010A* / DFVE60DP1300A*				
DESIGN SUBCOOLING @ AHRI 95 °F CONDITIONS, 15-17 °F - BOOST MODE				
OUTDOOR TEMP. °F	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75°	62,900	42,600	20,300	4,600
80°	62,600	43,000	19,600	4,900
85°	62,000	43,200	18,800	5,100
90°	61,100	43,100	18,000	5,400
95°	60,000	43,100	16,900	6,000
100°	58,600	43,700	14,900	6,700
105°	57,200	41,700	15,500	6,400
110°	53,600	40,400	13,200	6,300
115°	45,500	36,800	8,700	5,200
TVA CONDITIONS @ 95° OD DB, 75° ID, 63° ID WB				
95°	57,800	41,700	16,100	5,700

NORMAL MODE

SOUND POWER LEVEL ¹

TONNAGE	TOTAL UNIT SOUND RATING (dBA)	OCTAVE BAND SPECTRUM FREQUENCY (Hz) ANALYSIS (dBs)						
		125	250	500	1000	2000	4000	8000
2-ton	67	57.9	58.4	62.9	61.1	55.1	48.3	41.2
3-ton	71	60.3	64.5	65.2	65.8	60.9	54.4	48.1
4-ton	73	62.9	66.4	67.0	67.4	63.0	58.9	50.6
5-ton	77	79.6	76.8	75.5	71.8	67.2	59.0	53.6


¹ Compliant with AHRI 270.

² Compliant with AHRI 220.

QUIET MODE

TONNAGE	SOUND SUPPRESSION LEVEL	SOUND POWER LEVEL (dBA) ¹	SOUND PRESSURE LEVEL (dBA) ²
2-ton	LV.1	65	51
	LV.2	62	48
	LV.3	59	45
3-ton	LV.1	67	55
	LV.2	62	50
	LV.3	57	45
4-ton	LV.1	68	55
	LV.2	63	50
	LV.3	58	45
5-ton	LV.1	72	56
	LV.2	69	53
	LV.3	66	50


¹ Quiet Mode Sound Power and Sound Pressure levels determined at a distance of 3 [ft].

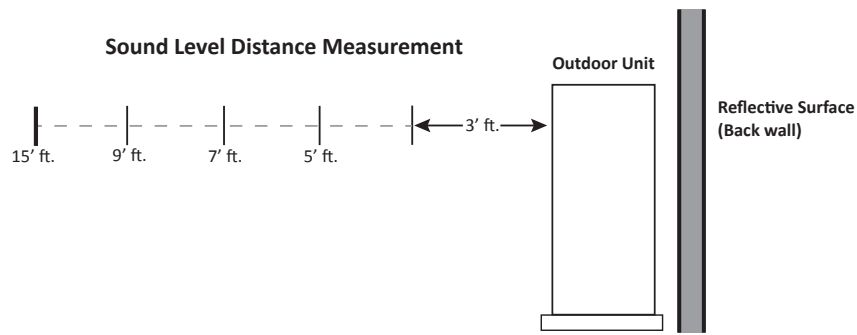


		SOUND PRESSURE (dBA) COOLING MODE ¹				
		DISTANCE FROM PROPERTY LINE				
TONNAGE	REFLECTIVE SURFACE QTY.	3'	5'	7'	9'	15'
2.0 Ton	0	60	55	52	50	46
	1	63	58	55	53	49
	2	66	61	58	56	52
3.0 Ton	0	64	59	56	54	50
	1	67	62	59	57	53
	2	70	65	62	60	56
4.0 Ton	0	66	61	58	56	52
	1	69	64	61	59	55
	2	72	67	64	62	58
5.0 Ton	0	70	65	62	60	56
	1	73	68	65	63	59
	2	76	71	68	66	62

¹ Compliant with AHRI 275 utilizing standard mode, total sound levels

***ALL AHRI SYSTEM RATINGS ARE ACCESSIBLE IN THE UNITARY MATCHUP TOOL VIA
DAIKIN CITY OR IN THE DAIKIN SYSTEM CONFIGURATOR TOOL VIA PARTNERLINK.***

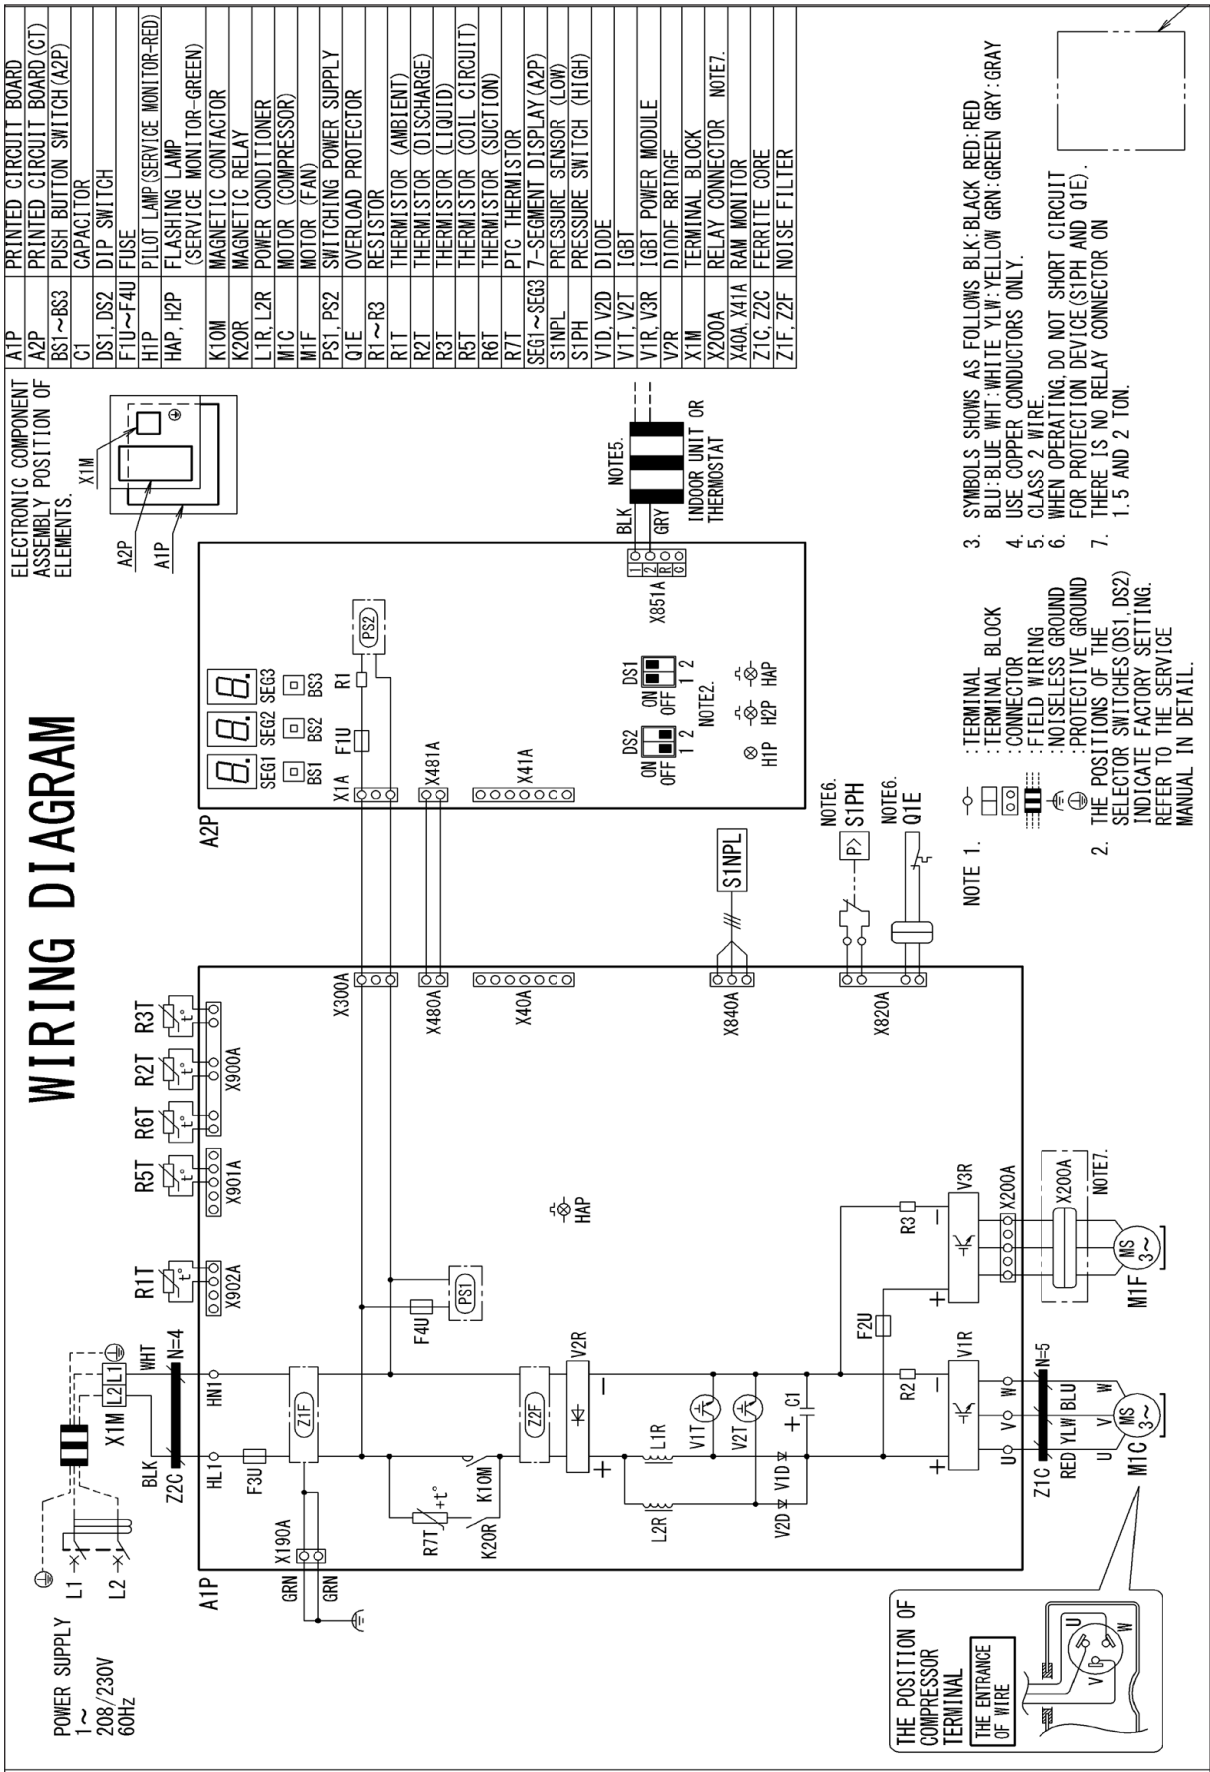

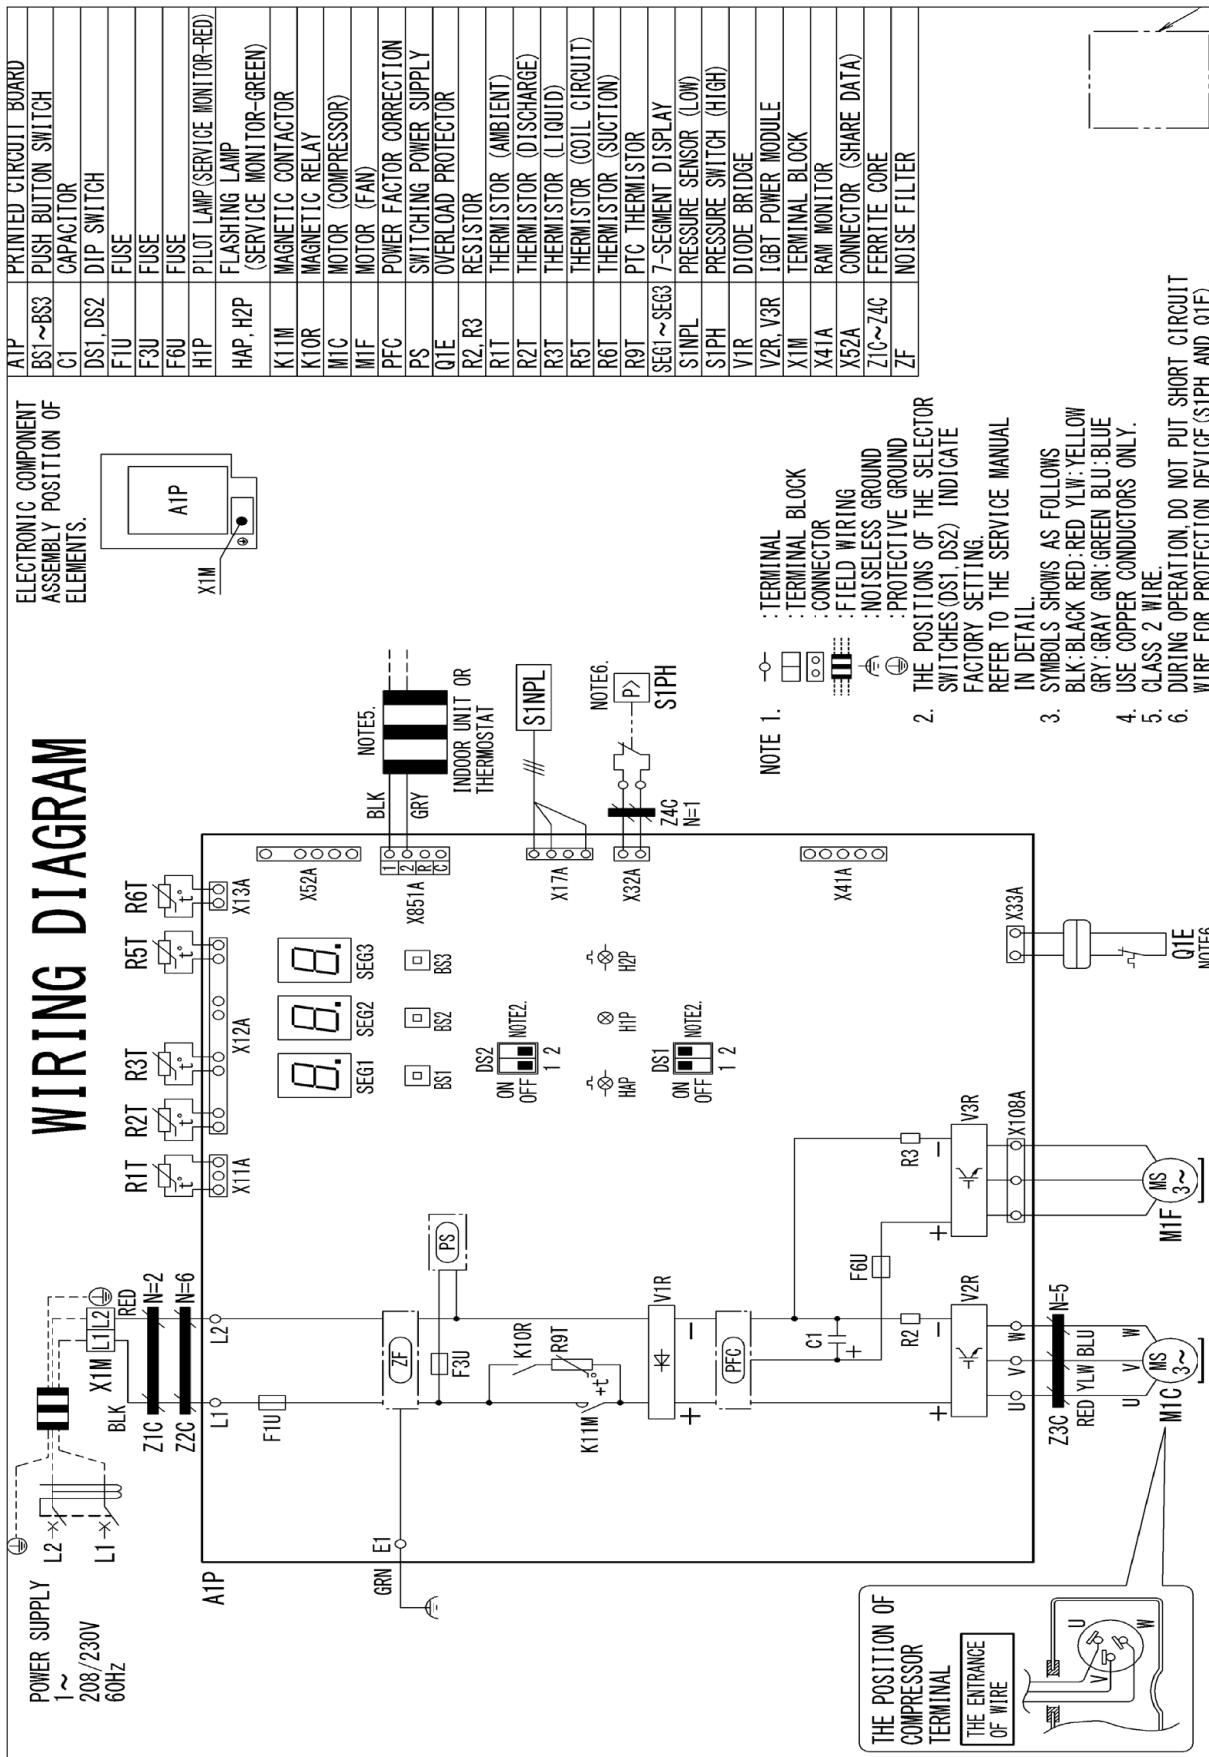


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

WIRING DIAGRAM

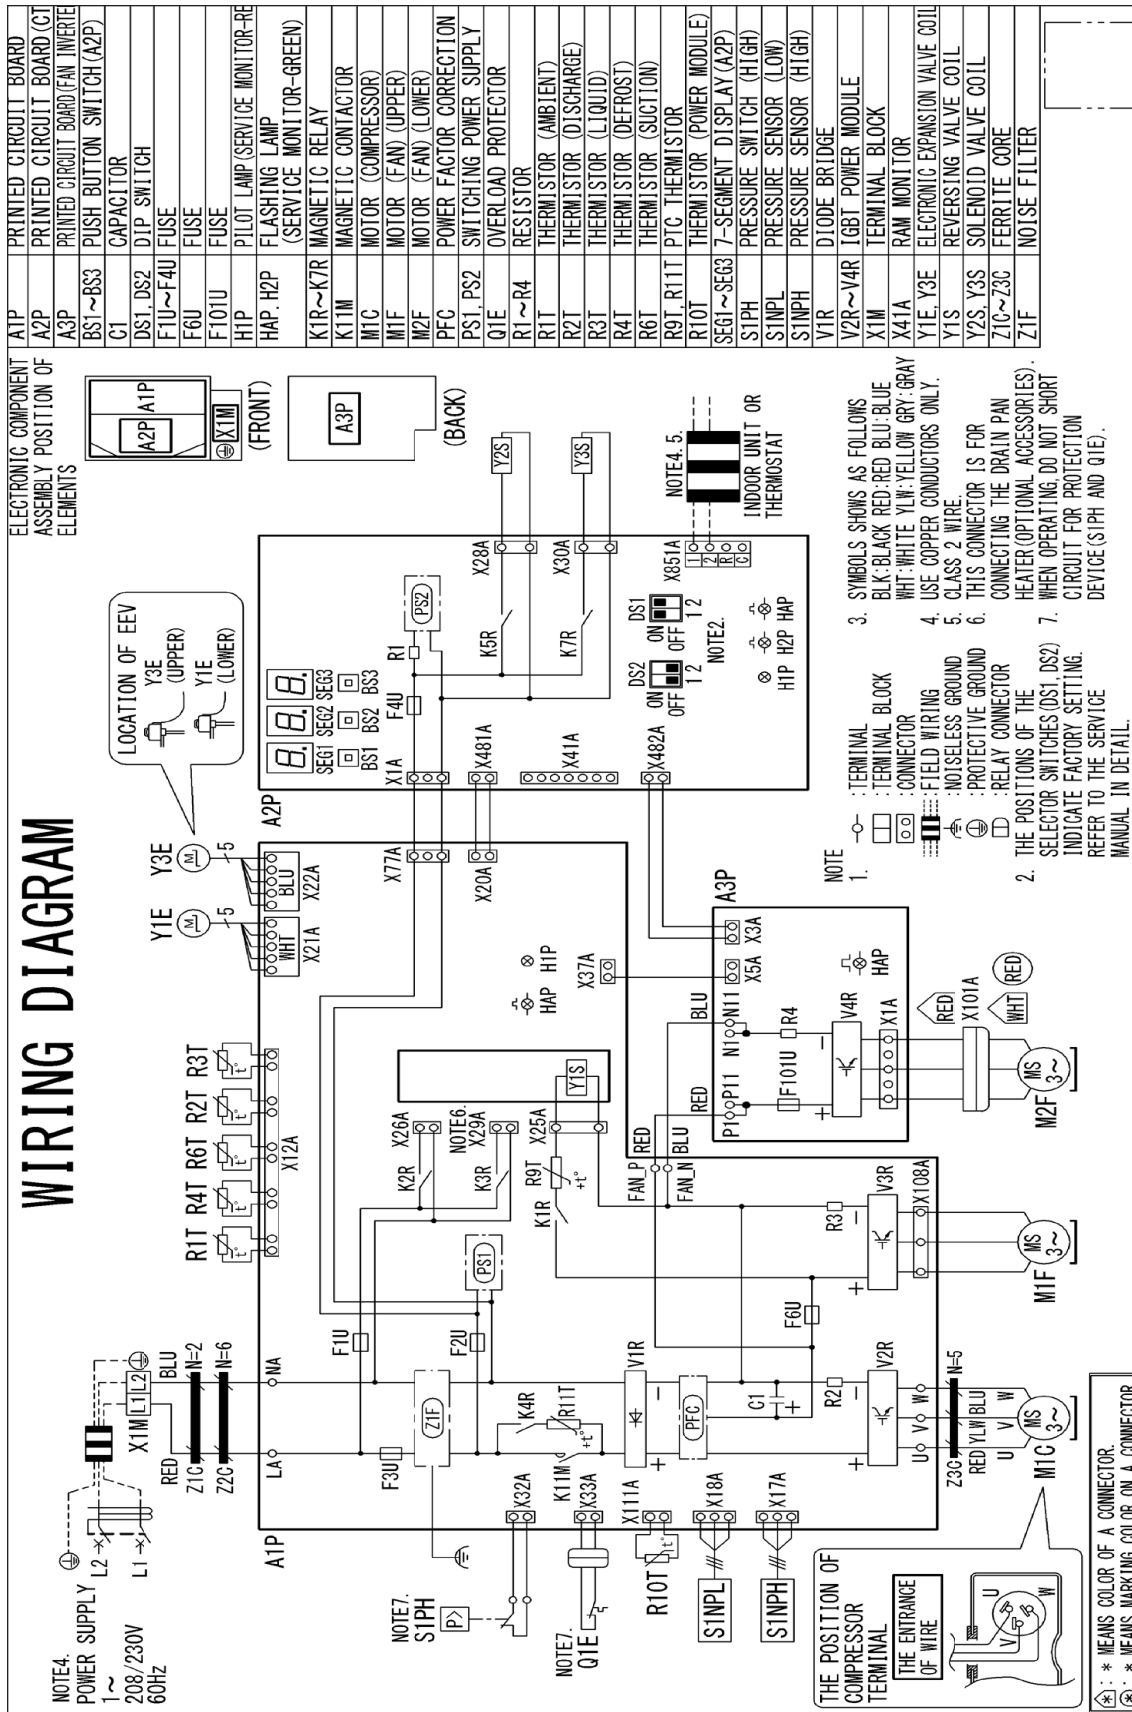

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.




MODEL	DIMENSIONS		
	W"	D"	H"
DC9VSA2410A*	36 $\frac{5}{8}$	13 $\frac{3}{4}$	27 $\frac{3}{8}$

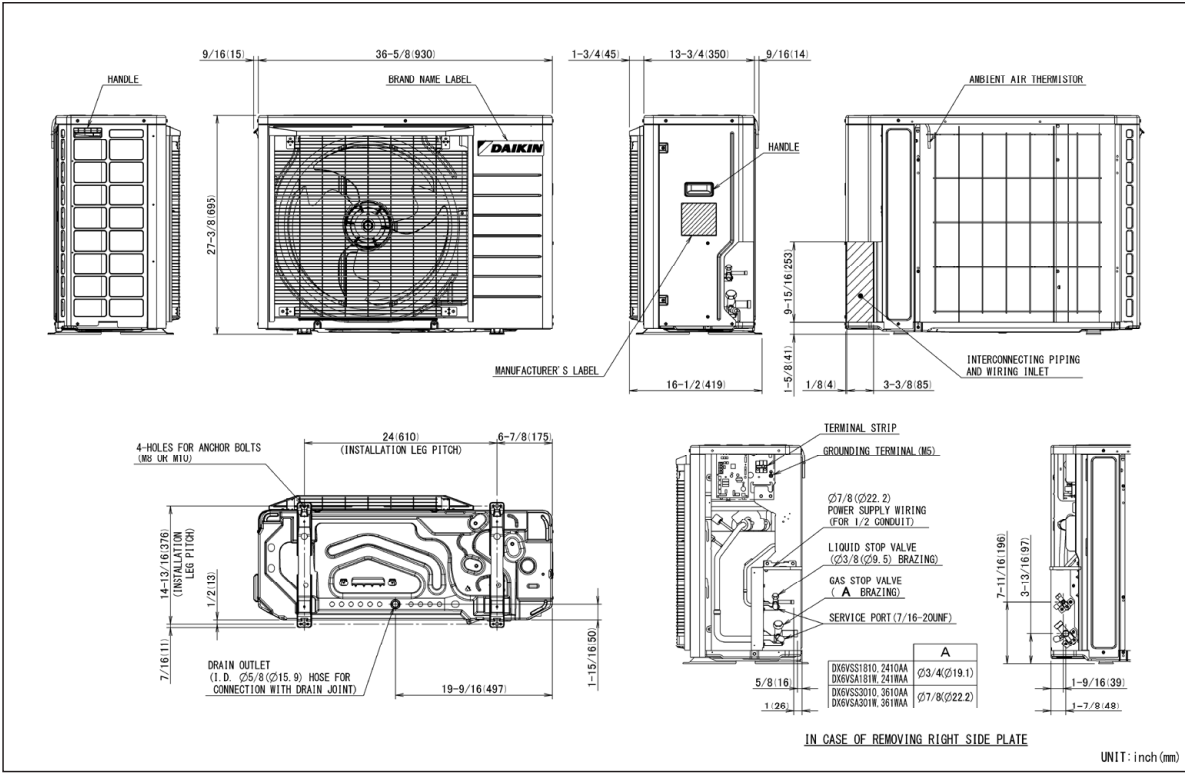

MODEL	DIMENSIONS		
	W"	D"	H"
DC9VSA3610A*	37	12 $\frac{1}{8}$	39
DC9VSA4810A*	37	12 $\frac{1}{8}$	39

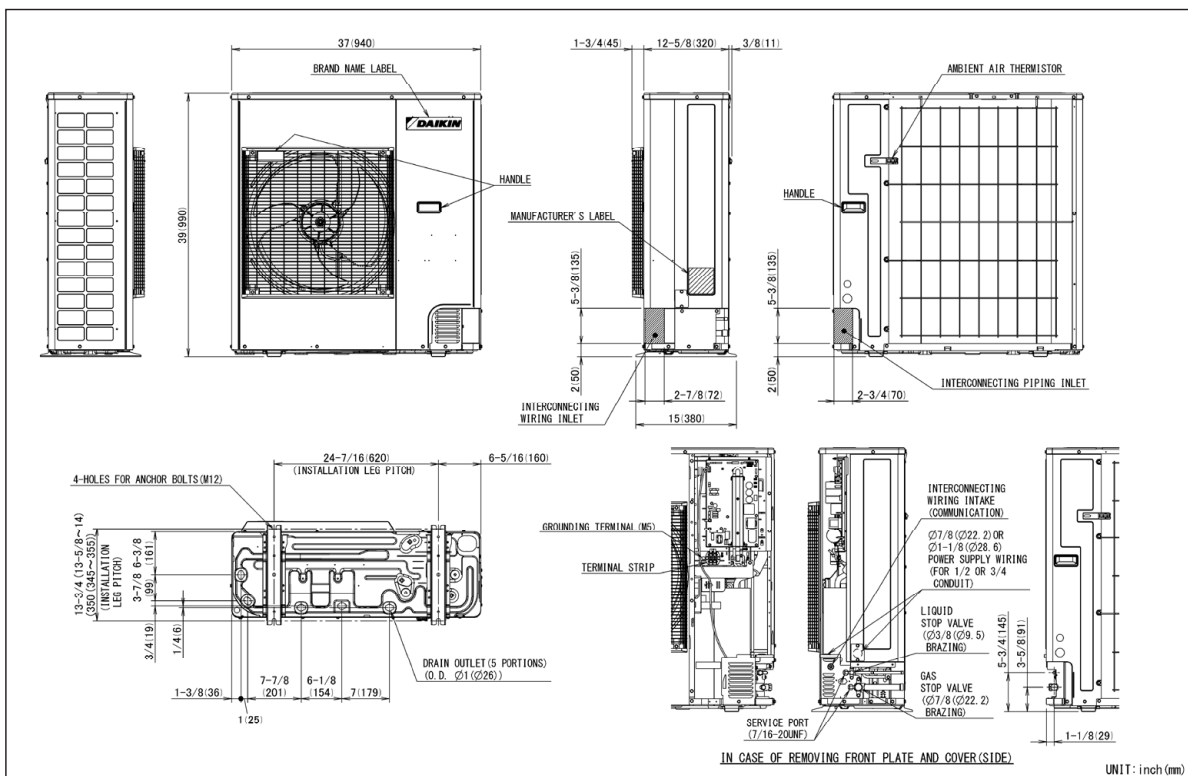

MODEL	DIMENSIONS		
	W"	D"	H"
DC9VSA6010A*	37	12 $\frac{5}{8}$	56 $\frac{5}{16}$

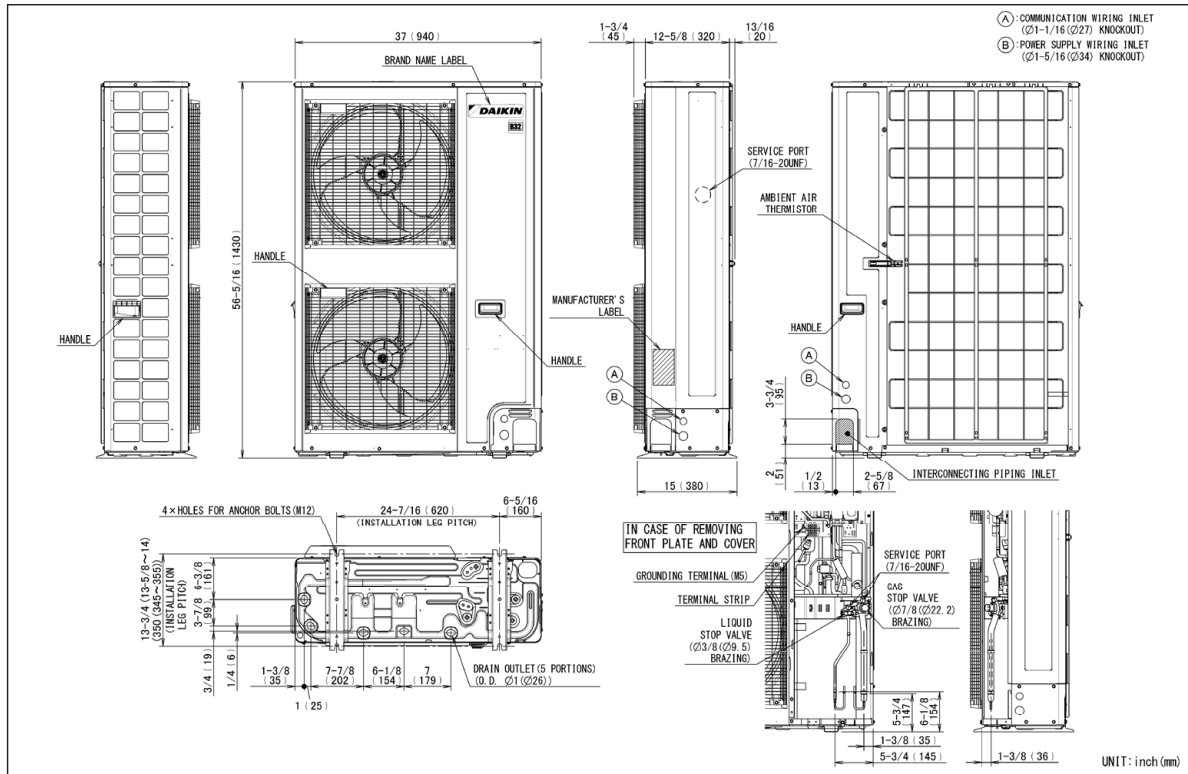

MODEL	DESCRIPTION	DC9VSA 2410A*	DC9VSA 3610A*	DC9VSA 4810A*	DC9VSA 6010A*
KPW5G112	Wind Baffle	X	X	X	X ¹ (2)
130-DK-006	Hail Guard	X			
130-DK-008	Hail Guard		X	X	
DSEN-HAQA	Daikin One Home Air Monitor	X	X	X	
DACA-WB-3	Powder Coated Wall-Mounted Bracket	X	X	X	
0270R02063 (130-DK-017)	Hail Guard				X
DSEN-HAQA	Daikin One Home Air Monitor				X

¹ Please ensure that 2 nos (KPW5G112) are ordered for each model when placing the order.

[illegible]