



Submittal Data Sheet

Multi-Position, Multi-Speed, ECB-Based Air Handler with Internal TXV R-32
AMST60DU1300

STANDARD FEATURES

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Direct drive, 9-speed ECM blower motor
- Factory installed 7mm AlumaFin7™ Evaporator Coil on 1½ to 3½ Ton models and 3/8 in. Evaporator Coil on 4 to 5 Ton models
- All-aluminum evaporator coil with high-performance coated fin stock
- Coil mounting track for quick repositioning
- Optimized for use with R-32 refrigerant with factory installed leak detection sensor for A2L mitigation.
- Cabinet air leakage less than 2.0% at 1.0 inch H2O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H2O when tested in accordance with ASHRAE standard 193
- 3 kW – 25 kW electric heater kits
- AHRI certified
- ETL listed

CABINET FEATURES

- Rigid SmartFrame cabinet
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access





Submittal Data Sheet

Multi-Position, Multi-Speed, ECB-Based Air Handler with Internal TXV R-32
AMST60DU1300

PERFORMANCE

Product Model No.	AMST60DU1300	Product Model Name:	Multi-Position, Multi-Speed, ECB-Based Air Handler with Internal TXV R-32
Type:	Air Handler	Cooling Capacity (Nominal) (Btu/hr):	60,000
Blower Motor Rating (HP):	1		

PRODUCT DETAILS

Power Supply (V/Hz/Ph):	208/240 / 60 / 1	Airflow Rate (High) (CFM):	
Min. Circuit Amps MCA (A):		Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):		Liquid Valve Connection Size (inch):	3/8
Dimensions (HxWxD) (in):	58 x 24-5/8 x 21	Condensate Connection (inch):	
Net Weight (lb):	167	Blower Size Diameter (inch):	11
Gross Weight (lb):	174	Blower Size Width (inch):	10

HEATER KIT MODEL	CIRCUIT 1 (208V/240V)			CIRCUIT 2 (208V/240V)			SINGLE-POINT KIT (208V/240V)	
	HEATER AMPS	MCA ¹	MOP ²	HEATER AMPS	MCA ¹	MOP ²	MCA ¹	MOP ²
AMST60DU1300AA	0/0	8.6/8.6	15/15	---	---	---	---	---
HKTSN03X1	10.8/12.5	22/24.3	25/25	---	---	---	---	---
HKTS*05X1	17.3/20	30.3/34	35/35	---	---	---	---	---
HKTSN06X1	21.7/25	36/39.9	40/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	45/50.3	45/60	---	---	---	---	---
HKTS*10X1	34.7/40	52/58.6	60/60	---	---	---	---	---
HKTS*15X3 ^	0/0	8.6/8.6	15/15	30/34.6	37.5/43.3	40/45	---	---
HKTSD15XA/B	34.7/40	52/58.6	60/60	17.3/20	21.7/25	25/25	73.6/83.6	80/90
HKTS*20X3 ^	0/0	8.6/8.6	15/15	37.5/43.3	46.9/54.1	50/60	---	---
HKTSD20DA/B	34.7/40	52/58.6	60/60	34.7/40	43.3/50	45/50	95.3/109	100/110
HKTSD25DA/B	52/60	73.6/83.6	80/90	35/40	43.3/50	45/50	117/134	125/150


¹Minimum Circuit Ampacity (Heater Amps + Motor Amps) X 1.25
²Maximum Overcurrent Protection = 2.25 X Motor Amps + Heater Amps
^ Three-phase Heater Kits (Circuit 1: Single-phase for Air Handlers Circuit 2: Three-phase for Heater Kits)
* D - Service disconnect, N - No service disconnect
--- indicates Not Required

Submittal Data Sheet

Multi-Position, Multi-Speed, ECB-Based Air Handler with Internal TXV R-32

AMST60DU1300

DIMENSIONAL DRAWING

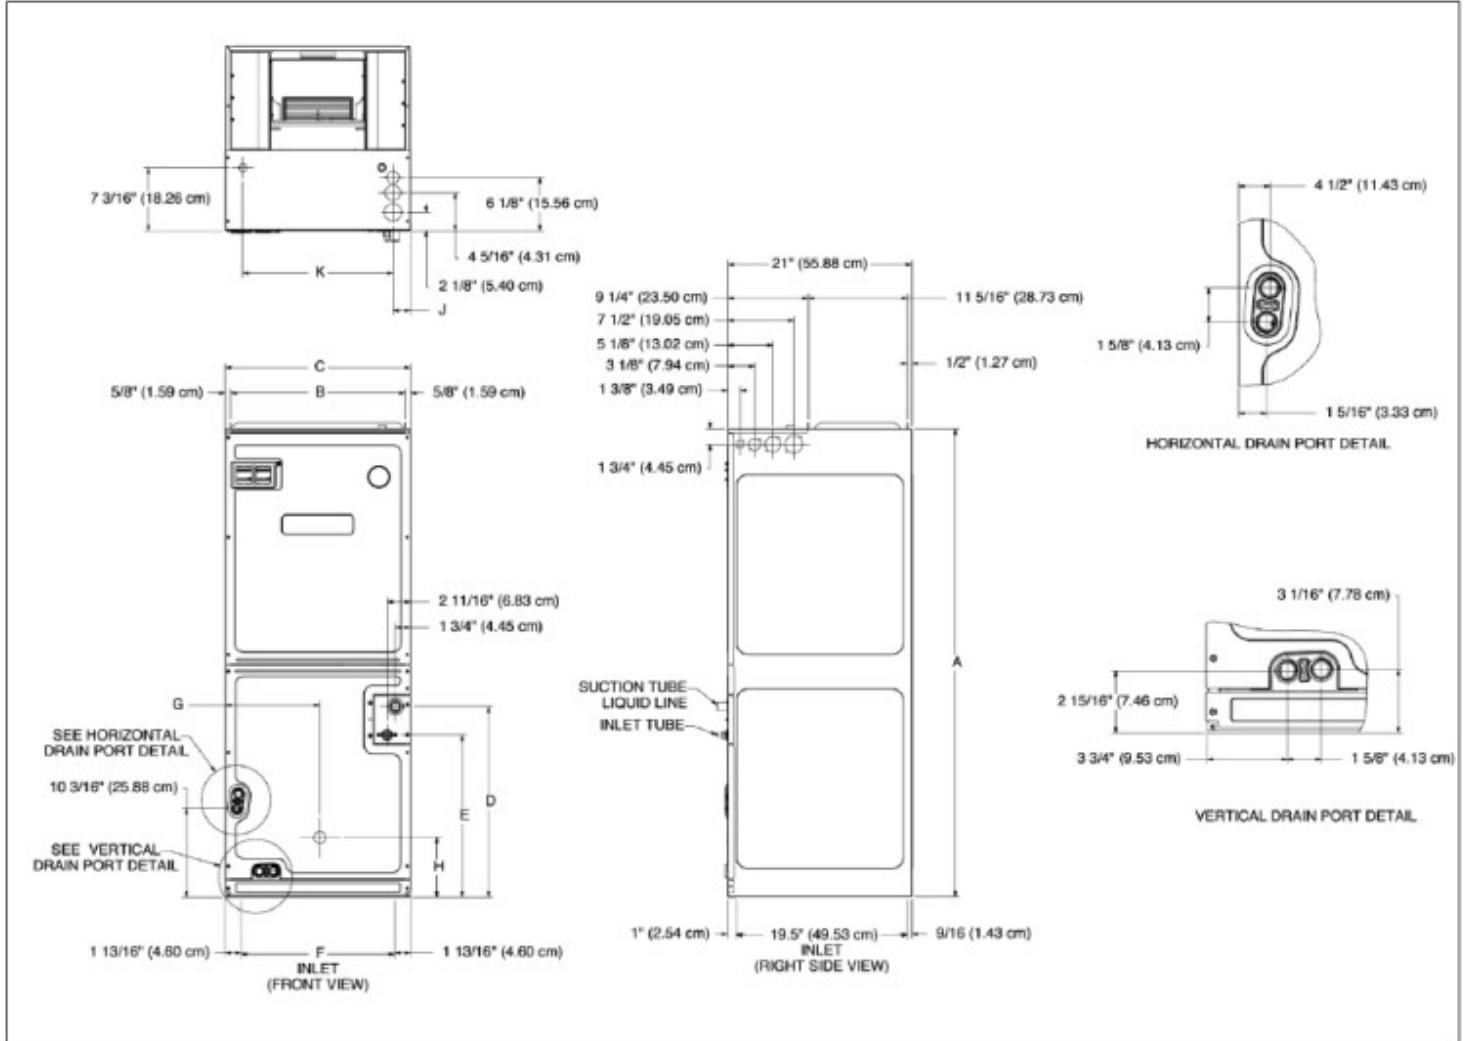

MODEL	A"	B"	C"	D"	E"	F"	G"	H"	J"	K"
AMST24BU*	45	16 ⁵ / ₁₆	17 ⁹ / ₁₆	15 ¹ / ₄	12	12 ¹ / ₂	9	12 ⁹ / ₁₆	2	13 ³ / ₈
AMST30BU*	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ¹ / ₁₆	12 ¹ / ₂	9	12 ³ / ₄	2	13 ³ / ₈
AMST36BU*	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ¹ / ₁₆	12 ¹ / ₂	9	12 ³ / ₄	2	13 ³ / ₈
AMST36CU*	49	19 ¹³ / ₁₆	21 ¹ / ₄	21 ¹² / ₁₆	17 ¹ / ₄	16 ¹ / ₁₆	9	12 ³ / ₄	2	17 ¹ / ₈
AMST42CU*	53 ⁷ / ₁₆	19 ¹³ / ₁₆	21 ¹ / ₄	21 ¹² / ₁₆	18 ¹ / ₂	16 ¹⁰ / ₁₆	9	12 ³ / ₄	2	17 ¹ / ₈
AMST48CU*	58	19 ¹³ / ₁₆	21 ¹ / ₄	26 ³ / ₁₆	22 ¹⁵ / ₁₆	14 ¹⁰ / ₁₆	10 ¹³ / ₁₆	6 ¹³ / ₁₆	2	17 ¹ / ₈
AMST06DU*	58	23 ¹ / ₄	24 ³ / ₈	26	22 3/4	17 ¹¹ / ₁₆	12 ⁹ / ₁₆	13 ¹³ / ₁₆	2	20 ³ / ₈



Submittal Data Sheet

Multi-Position, Multi-Speed, ECB-Based Air Handler with Internal TXV R-32
AMST60DU1300

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
HKTSD05X1	Electric Heat Kit, 5 KW	No
HKTSD08X1	Electric Heat Kit, 8 KW	No
HKTSD10X1	Electric Heat Kit, 10 KW	No
HKTSD15X3	Electric Heat Kit, 15 KW	No
HKTSD15XA	Electric Heat Kit, 15 KW	No
HKTSD15XB	Electric Heat Kit, 15 KW	No
HKTSD20DA	Electric Heat Kit, 20 KW	No
HKTSD20DB	Electric Heat Kit, 20 KW	No
HKTSD20X3	Electric Heat Kit, 20 KW	No
HKTSD25DA	Electric Heat Kit, 25KW	No
HKTSD25DB	Electric Heat Kit, 25KW	No
HKTSN03X1	Electric Heat Kit, 3 KW, 1 PH	No
HKTSN05X1	Electric Heat Kit, 5 KW, 1 PH	No
HKTSN06X1	Electric Heat Kit, 6 KW, 1 PH	No
HKTSN08X1	Electric Heat Kit, 8 KW, 1 PH	No
HKTSN10X1	Electric Heat Kit, 10 KW, 1 PH	No
HKTSN15X3	Electric Heat Kit, 15 KW	No
HKTSN20X3	Electric Heat Kit, 20 KW	No