



Submittal Data Sheet

7.5 Ton Light Commercial Air Handler 208/230V 3PH R32

DAQ09033

STANDARD FEATURES

- TXV Control; Units have two (2) thermal expansion valves • DAQ units feature two 5-speed direct-drive motors • Copper tube/aluminum fin coils • AHRI Certified; ETL Listed • R-32 leak mitigation system

CABINET FEATURES

- Heavy-gauge, reinforced, galvanized-steel cabinet • Fully insulated with fiberglass blanket • Horizontal and vertical condensate pans • Built-in filter rack (2" filter included) • Entry on top of panel for both low and high voltage • Removable access panels make servicing of unit faster and easier





Submittal Data Sheet
7.5 Ton Light Commercial Air Handler 208/230V 3PH R32
DAQ09033

PERFORMANCE

Product Model No.	DAQ09033	Product Model Name:	7.5 Ton Light Commercial Air Handler 208/230V 3PH R32
Type:	Light Commercial Air Handler	Cooling Capacity (Nominal) (Btu/hr):	90,000

PRODUCT DETAILS

Dimensions (HxWxD) (in):	24.1875 x 60-1/2 x 48.09375	Suction Valve Connection Size (inch):	1-1/8
Net Weight (lb):	430	Liquid Valve Connection Size (inch):	5/8
Gross Weight (lb):	393	Condensate Connection (inch):	


AIR HANDLER	AHKD MODEL	NOMINAL KW	ELECTRICAL DATA	STAGES	WEIGHT (LBS.)	MCA ¹	MOP ²
DAQ0903** and DAQ1203**	None	N/A	208-230/3/60	N/A	N/A	15.5 / 15.5	20 / 20
	AHKD15-3A	15	208-240/3/60	1	56	54.8-60.6	60 / 70
	AHKD20-3A	20	208-240/3/60	2	59	67.3-75.0	70 / 80
	AHKD30-3A	30	208-240/3/60	2	60	92.3-104	100 / 110
	None	N/A	460/3/60	N/A	N/A	5.2	15
	AHKD15-4A	15	480/3/60	1	55	27.4	30
	AHKD20-4A	20	480/3/60	2	57	34.6	35
	AHKD30-4A	30	480/3/60	2	58	49.1	50

¹ Minimum Circuit Ampacity
² Maximum Overcurrent Protection

- NOTES:**
- These air handlers do not have factory-installed electric heat. The above-listed kits are the ONLY heater kits that can be used with this commercial series. They are available for purchase as field-installed accessories.
 - The electrical characteristics of the air handler, electric heater kits, and building power supply must be compatible.

DIMENSIONAL DRAWING


DIMENSIONS

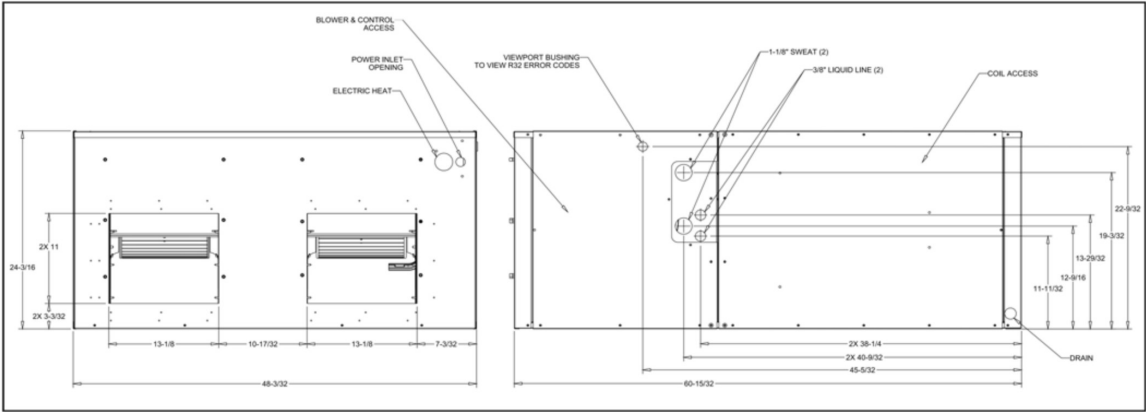


DUCT CONNECTION SIZING WITHOUT ELECTRIC HEATERS

MINIMUM SUPPLY AND RETURN DUCT DIMENSIONS

DIMENSIONAL DATA FOR ELECTRIC HEATER KITS	
• 15, 20, & 30 kW Heater Kits	
• Supply opening is 13 3/8" x 40 3/8"	

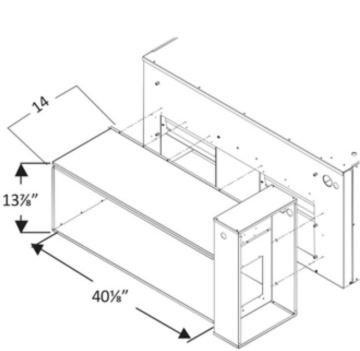

SUPPLY DUCT		RETURN DUCT	
A	B	C	D
13 3/8"	40"	24"	48"

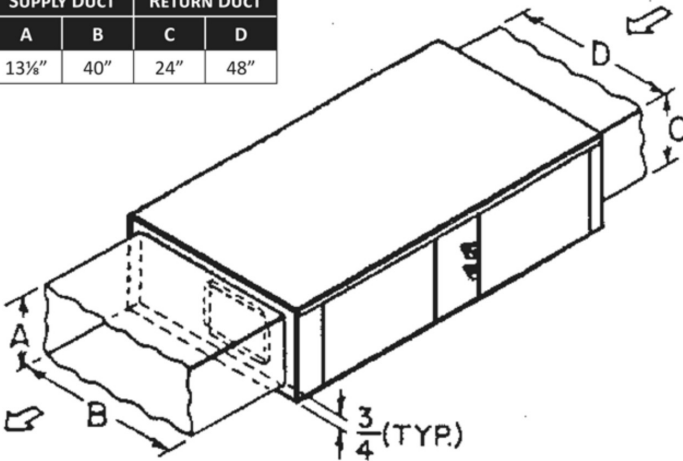



Submittal Data Sheet
7.5 Ton Light Commercial Air Handler 208/230V 3PH R32
DAQ09033

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
0151A00013	Adjustable Valve TXV .R32	No
0151A00014	Adjustable Valve TXV .R32	No
AHKD15-3A	Elec Heatkit 15Kw 230V	No
AHKD20-3A	Elec Heatkit 20Kw 230V	No
AHKD30-3A	Elec Heatkit 30Kw 230V	No
FSK05A	Freeze Thermostat Kit	No