



Submittal Data Sheet

17.2 seer2 ac, 2stg 2.0t

DC7TCA2410

STANDARD FEATURES

- Two-Stage Copeland® Ultra-Tech scroll compressor
- High-density foam compressor sound blanket
- Compatible with Daikin One Plus smart thermostat and other Daikin communicating equipment
- Copeland® ComfortAlert™ built in diagnostics
- Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- Diagnostic indicator lights and fault code storage
- Color-coded terminal strip
- Quiet ECM outdoor fan motor
- Fully charged for 15' of tubing length
- Factory-installed filter drier
- Ambient temperature sensors
- High- and low-pressure switches
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

CABINET FEATURES

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available).





Submittal Data Sheet
17.2 seer2 ac, 2stg 2.0t
DC7TCA2410

PERFORMANCE COMBINATION (HSVTC) * VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DC7TCA2410	Outdoor Unit Name:	17.2 seer2 ac, 2stg 2.0t
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): /
* EER:		* EER2:	12.20
* SEER:		* SEER2:	15.20
* Rated Cooling Capacity (Btu/hr):	24,000		

OUTDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Two Stage
Min. Circuit Amps MCA (A):	15	Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):	20	Liquid Valve Connection Size (inch):	3/8
Running Load:		Sound Power (High) (dBA):	69
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	55 - 125
Holding Refrigerant Charge (ozs):	104	Heating Operation Range (°F DB):	-
Additional Charge (ounces/ft):		Max. Pipe Length (Vertical) (ft):	79
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	200	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	214	Gross Weight (lb):	227
Dimensions (HxWxD) (in):	39.5 x 35-1/2 x 35.5		



Submittal Data Sheet
17.2 seer2 ac, 2stg 2.0t
DC7TCA2410

DIMENSIONAL DRAWING

MODEL	DIMENSIONS		
	W"	D"	H"
DC7TCA2410A*	35½	35½	39½
DC7TCA3610A*	35½	35½	39½
DC7TCA4810A*	35½	35½	41⅝
DC7TCA6010A*	35½	35½	41⅝

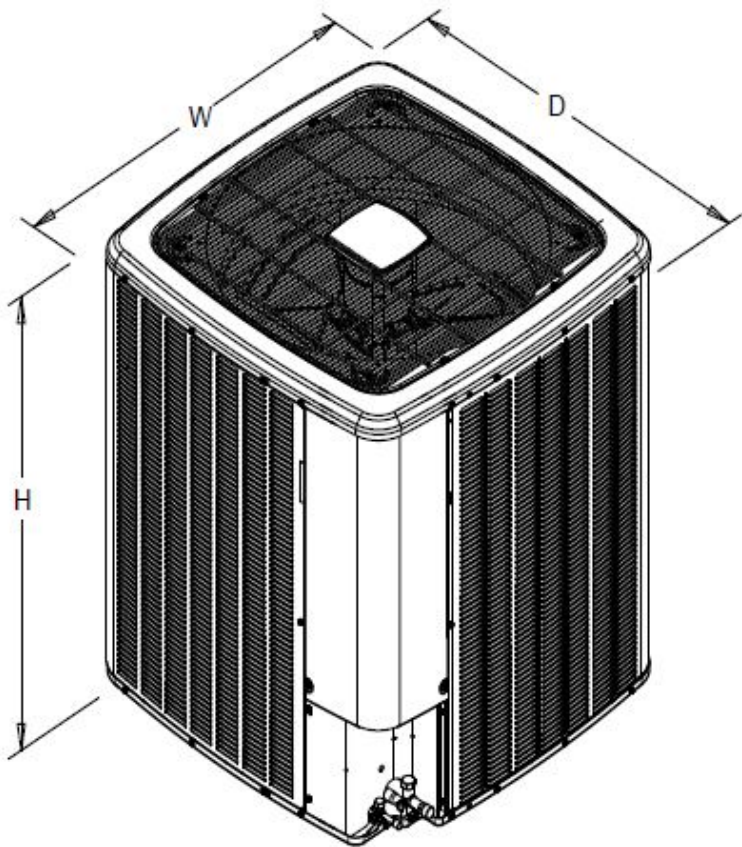



Submittal Data Sheet
17.2 seer2 ac, 2stg 2.0t
DC7TCA2410

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
ABK-20	ANCHOR BRACKET KIT	No
ASC01A	ANTI-SHORT CYCLE KIT	No
CSR-U-1	Compressor Saver - Hard Start Kit - 1 TO 3 Ton	No
FSK01A	Freeze-Stat Kit	No
LSK02A	SOLENOID KIT FOR REM	No
OT18-60A	Outdoor Thermostat Kit	No
TXV-FX-KX-2T	TXV-FX-KX-2T-Srv Kit	No