



Submittal Data Sheet

14.3 SEER2 HP R32, 5 Ton

DH4SEA6010

STANDARD FEATURES

- High-Efficiency Copeland Scroll Compressor
- Factory-installed bi-flow liquid line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- Enhanced aluminum fin coil with 5mm diameter copper tubes in 1.5 -to 3.5 ton
- Enhanced aluminum fin coil with 7mm diameter copper tubes in 4.0 -to 5.0 ton
- High and low-pressure switches
- Fully charged for 15' of tubing length
- Service valves with sweat connections and easy-to-access gauge ports
- High density foam compressor sound blanket on 1.5-2.0T, Advanced Copeland CoreSense Technology
- Time-delay technology to ensure quiet reliable defrost
- Capacitor with extended life
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Removable grille style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Steel louver coil guard with rust-resistant screws
- Wire fan discharge grille
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Custom Nickel Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available)

NOTES

- R32 Outdoor



Submittal Data Sheet
14.3 SEER2 HP R32, 5 Ton
DH4SEA6010

PERFORMANCE COMBINATION (HSVTC) * VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH4SEA6010	Outdoor Unit Name:	14.3 SEER2 HP R32, 5 Ton
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):	56,500	* Rated Heating Capacity (Btu/hr):	57,000
* EER:		* EER2:	12.50
* SEER:		* SEER2:	14.50
* HSPF:		* HSPF2:	8.2
* Heating COP:			

OUTDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Single Stage
Min. Circuit Amps MCA (A):	31.1	Suction Valve Connection Size (inch):	7/8
Max Overcurrent Protection (MOP) (A):	50	Liquid Valve Connection Size (inch):	3/8
Running Load:		Sound Power (High) (dBA):	74
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	55 - 125
Holding Refrigerant Charge (ozs):	194	Heating Operation Range (°F DB):	-20 - 70
Additional Charge (ounces/ft):	0.64	Max. Pipe Length (Vertical) (ft):	79
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	200	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	300	Gross Weight (lb):	317
Dimensions (HxWxD) (in):	41.75 x 35-1/2 x 35.5		



Submittal Data Sheet
14.3 SEER2 HP R32, 5 Ton
DH4SEA6010

DIMENSIONAL DRAWING

MODEL	DIMENSIONS		
	W"	D"	H"
DH4SEA1810A*	29	29	32½
DH4SEA2410A*	29	29	32½
DH4SEA3010A*	29	29	39½
DH4SEA3610A*	35½	35½	35½
DH4SEA4210A*	35½	35½	35½
DH4SEA4810A*	35½	35½	36½
DH4SEA6010A*	35½	35½	41¾

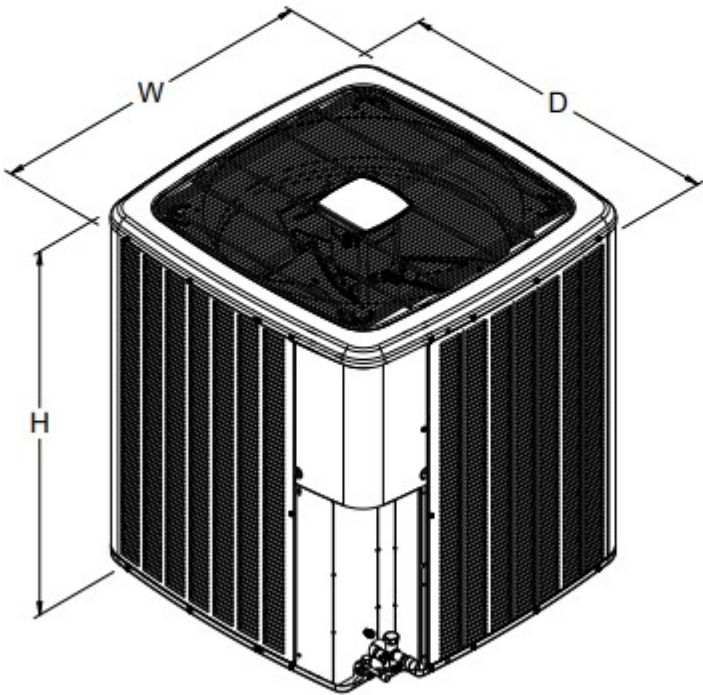



Submittal Data Sheet
14.3 SEER2 HP R32, 5 Ton
DH4SEA6010

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
ABK-20	ANCHOR BRACKET KIT	No
ASC01A	ANTI-SHORT CYCLE KIT	No
CSR-U-2	3 TO 5 TON COMP SAVER 25/CS	No
CSR-U-3	4 TO 5 TON SCROLL COMP SAVER	No
FSK01A	Freeze-Stat Kit	No
LSK02A	SOLENOID KIT FOR REM	No
OT18-60A	Outdoor Thermostat Kit	No
TXV-FX-KX-5T	TXV-FX-KX-5T-Srv Kit	No