



Submittal Data Sheet

16 SEER2 HP R32, 1.5 Ton

DH5SEA1810

STANDARD FEATURES

- High-efficiency Copeland® scroll compressor
- Advanced Copeland® CoreSense™ technology
- Enhanced aluminum fin with coil-5mm diameter copper tubes in 1.5T-3.5T
- Enhanced aluminum fin coil with 7mm diameter copper tubes 4.0-5.0 ton
- Single-speed PSC condenser fan motor
- High density foam compressor sound blanket
- Time-delay technology to ensure quiet reliable defrost
- Factory-installed bi-flow liquid line filter drier
- High density foam compressor sound blanket
- Factory-installed suction line accumulator
- Factory-installed compressor crank case heater
- Factory-installed high capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully enclosed contactor
- Capacitor with extended life Copper tube/enhanced aluminum fin coil
- Fully charged for 15' of tubing length
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Removable grille-style top design compliant with UL 60335-2-40
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Rust-resistant screws
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

NOTES

- R32 Outdoor



Submittal Data Sheet
16 SEER2 HP R32, 1.5 Ton
DH5SEA1810

PERFORMANCE COMBINATION (HSVTC) * VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH5SEA1810	Outdoor Unit Name:	16 SEER2 HP R32, 1.5 Ton
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):		* Rated Heating Capacity (Btu/hr):	17,800
* EER:		* EER2:	12.50
* SEER:		* SEER2:	15.20
* HSPF:	7.8	* HSPF2:	7.8
* Heating COP:			

OUTDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Single Stage
Min. Circuit Amps MCA (A):	12.6	Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):	20	Liquid Valve Connection Size (inch):	3/8
Running Load:		Sound Power (High) (dBA):	70
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	55 - 125
Holding Refrigerant Charge (ozs):	88	Heating Operation Range (°F DB):	-20 - 70
Additional Charge (ounces/ft):	0.55	Max. Pipe Length (Vertical) (ft):	79
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	200	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	171	Gross Weight (lb):	189
Dimensions (HxWxD) (in):	39.5 x 29 x 29		



Submittal Data Sheet
16 SEER2 HP R32, 1.5 Ton
DH5SEA1810

DIMENSIONAL DRAWING

DIMENSIONS

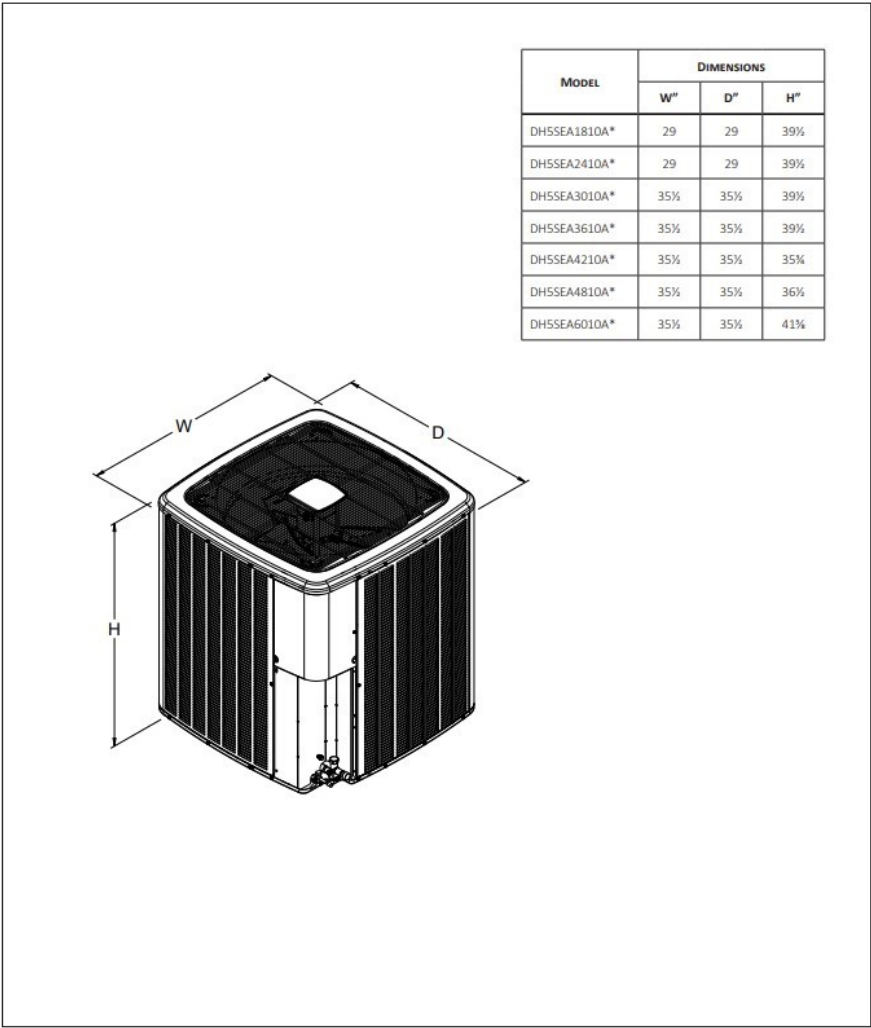



Submittal Data Sheet
16 SEER2 HP R32, 1.5 Ton
DH5SEA1810

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
0161R00128	Cap, Spiral Grill	No
ABK-20	ANCHOR BRACKET KIT	No
CSR-U-1	Compressor Saver - Hard Start Kit - 1 TO 3 Ton	No
FSK01A	Freeze-Stat Kit	No
OT18-60A	Outdoor Thermostat Kit	No
TXV-FX-KX-2T	TXV-FX-KX-2T-Srv Kit	No