



## Submittal Data Sheet

16.0 IEER HP R32, 10 ton 208/230V 3PH

DH6TE12030

### STANDARD FEATURES

- Two-Stage tandem compressor design with internal pressure release valve.
- High-capacity, steel-cased, bi-flow heat pump filter drier.
- Liquid refrigerant return protection.
- Check flowrate heating mode expansion device.
- Reliable, time-initiated, temperature- terminated defrost control.
- High and low pressure switches.
- Discharge line muffler.
- Brass liquid and suction line service valves mounted at a 90° angle with sweat connections and service ports.
- High-efficiency copper tube / aluminum fin coil.
- Complies with ASHRAE 90.1-2016
- AHRI Certified; ETL Listed.

### CABINET FEATURES

- Innovative sound control top design
- Steel louver coil guard protects the coil from damage and adds strength to unit
- Bottom pan rails elevate unit above slab
- Heavy-gauge galvanized-steel cabinet
- Attractive Nickel Gray powder-paint finish
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)





Submittal Data Sheet

16.0 IEER HP R32, 10 ton 208/230V 3PH  
DH6TE12030

PERFORMANCE COMBINATION (HSVTC) \* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

|                                    |                                                           |                                    |                                                           |
|------------------------------------|-----------------------------------------------------------|------------------------------------|-----------------------------------------------------------|
| Outdoor Unit Model No.             | DH6TE12030                                                | Outdoor Unit Name:                 | 16.0 IEER HP R32, 10 ton 208/230V 3PH                     |
| Rated Cooling Conditions:          | Indoor (°F DB/WB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 | Rated Heating Conditions:          | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |
| Max/Min Cooling Capacity (Btu/hr): |                                                           | Max/Min Heating Capacity (Btu/hr): |                                                           |
| * Rated Cooling Capacity (Btu/hr): | 115,000                                                   | * Rated Heating Capacity (Btu/hr): |                                                           |
| * EER:                             | 11.20                                                     | * EER2:                            |                                                           |
| * SEER:                            |                                                           | * SEER2:                           |                                                           |
| * HSPF:                            |                                                           | * HSPF2:                           |                                                           |
| * Heating COP:                     | 3.4                                                       |                                    |                                                           |

OUTDOOR UNIT DETAILS


|                                       |                      |                                       |           |
|---------------------------------------|----------------------|---------------------------------------|-----------|
| Power Supply (V/Hz/Ph):               | 208/230 / 60 / 3     | Compressor Stage:                     | Two Stage |
| Min. Circuit Amps MCA (A):            | 41.6                 | Suction Valve Connection Size (inch): | 1-1/8     |
| Max Overcurrent Protection (MOP) (A): | 50                   | Liquid Valve Connection Size (inch):  | 5/8       |
| Running Load:                         | 15.4                 | Sound Power (High) (dBA):             | 86        |
| Refrigerant Type:                     | R-32                 | Cooling Operation Range (°F DB):      | 55 - 120  |
| Holding Refrigerant Charge (ozs):     | 110                  | Heating Operation Range (°F DB):      | -5 - 70   |
| Additional Charge (ounces/ft):        | 1.62                 | Max. Pipe Length (Vertical) (ft):     | 25        |
| Pre-charge Piping (Length) (ft):      | 15                   | Min. Cooling Range w/Baffle (°F DB):  |           |
| Max. Pipe Length (Total) (ft):        | 150                  | Min. Heating Range w/Baffle (°F DB):  |           |
| Net Weight (lb):                      | 417                  | Gross Weight (lb):                    | 411       |
| Dimensions (HxWxD) (in):              | 41.5 x 35-1/2 x 35.5 |                                       |           |



**Submittal Data Sheet**  
16.0 IEER HP R32, 10 ton 208/230V 3PH  
DH6TE12030

**DIMENSIONAL DRAWING**

*DIMENSIONS*

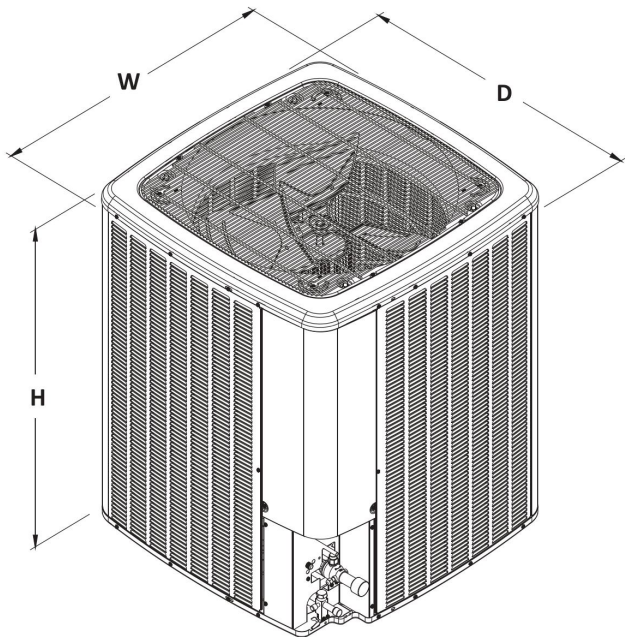

| MODEL        | DIMENSIONS |      |      |
|--------------|------------|------|------|
|              | W"         | D"   | H"   |
| DH6TE09030A* | 35½"       | 35½" | 41½" |
| DH6TE09040A* | 35½"       | 35½" | 41½" |
| DH6TE12030A* | 35½"       | 35½" | 41½" |
| DH6TE12040A* | 35½"       | 35½" | 41½" |



**Submittal Data Sheet**  
16.0 IEER HP R32, 10 ton 208/230V 3PH  
DH6TE12030

ACCESSORIES

| PART<br>NUMBER | DESCRIPTION            | INCLUDED |
|----------------|------------------------|----------|
| 0130L20000     | Heater, Crankcase      | No       |
| 0130L20001     | Heater, Crankcase      | No       |
| ABK-20         | ANCHOR BRACKET KIT     | No       |
| LAKT01HP       | Low Ambient Kit        | No       |
| LSK01A         | SOLENOID KIT FOR REM   | No       |
| OT18-60-02A    | Outdoor Thermostat Kit | No       |