



Submittal Data Sheet

16.2 SEER2 HP R32, 3.5 Ton

DH6VSA4210

STANDARD FEATURES

- Daikin variable-speed swing compressor
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Daikin control algorithmic logic
- Intelligent Defrost Mode
- In communicating mode, only two low-voltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Daikin Inside intelligence for diagnostics
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Muffler on 1.5-3.0-ton models
- Sweat connection service valves with easy access to gauge ports
- Advanced water-shedding drain pan
- Hot start technology
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- 500-hour salt-spray tested
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

NOTES

- R32 Outdoor



Submittal Data Sheet

16.2 SEER2 HP R32, 3.5 Ton

DH6VSA4210

PERFORMANCE COMBINATION (HSVTC)

* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH6VSA4210	Outdoor Unit Name:	16.2 SEER2 HP R32, 3.5 Ton
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):	41,000	* Rated Heating Capacity (Btu/hr):	40,000
* EER:		* EER2:	9.00
* SEER:		* SEER2:	17.00
* HSPF:		* HSPF2:	8.2
* Heating COP:	3.3		

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Min. Circuit Amps MCA (A):	31.8	Suction Valve Connection Size (inch):	7/8
Max Overcurrent Protection (MOP) (A):	35	Liquid Valve Connection Size (inch):	3/8
Fan/Compressor Drive Input:		Sound Power (High) (dBA):	70
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	0 - 115
Holding Refrigerant Charge (ozs):	100	Heating Operation Range (°F DB):	-10 - 70
Additional Charge (ounces/ft):		Max. Pipe Length (Vertical) (ft):	90
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	100	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	168	Gross Weight (lb):	194
Dimensions (HxWxD) (in):	39 x 37 x 12.625		

Submittal Data Sheet


16.2 SEER2 HP R32, 3.5 Ton

DH6VSA4210

DIMENSIONAL DRAWING

DIMENSIONS

MODEL	DIMENSIONS		
	W"	D"	H"
DH6VSA4210A*	37	12%	39
DH6VSA4810A*	37	12%	39
DH6VSA6010A*	37	12%	39

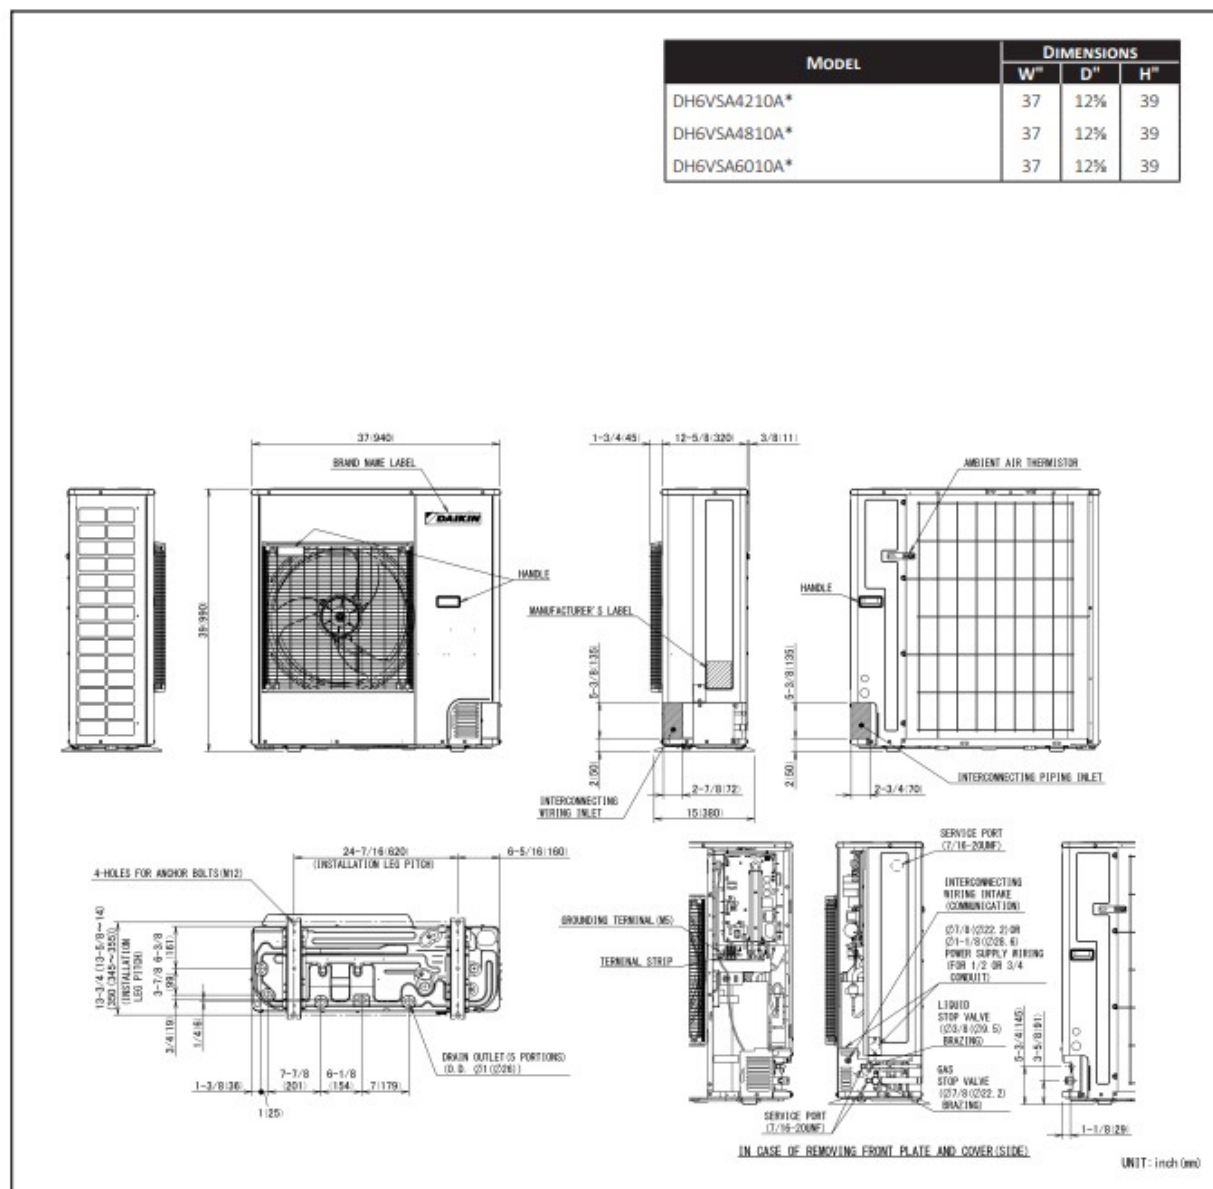



Submittal Data Sheet
16.2 SEER2 HP R32, 3.5 Ton
DH6VSA4210

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
130-DK-008	Hail Guard	No
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
DQ-P-16-100	Daikin One Powered Ventilator	No
DSEN-HAQA	Daikin One Home Air Monitor	No
DTA119A73	D24V Gateway supports R-32 AC/HP for all SD brands, integrating with any furnace	No
KEH3P573567	Heater, Drain Pan, 5 Ton	No
KPS00601	Snow Guard Front	No
KPS00602	Snow Guard Rear	No
KPS00603	Snow Guard Side	No
KPS00604	Snow Guards - Complete Set	No
KPW5G112	Air Adjustment Grille/ Wind Baffle	No