



Submittal Data Sheet

17.2 SEER2 HP R32, 3 ton

DH7TCA3610

STANDARD FEATURES

- Two-Stage Copeland® UltraTech scroll compressor
- High-density foam compressor sound blanket
- Compatible with Daikin One+ smart thermostat Daikin One Touch, and other Daikin communicating equipment
- ComfortAlert™ built in diagnostics
- Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- Copper tube/enhanced aluminum fin coil - 7mm on 4.0-5.0T
- Efficient, two-speed ECM condenser fan motor
- Simple low-voltage wiring to outdoor unit in communicating mode
- Diagnostic indicator lights and storage of six fault codes
- Color-coded terminal strip for non-communicating set-up
- High- and low-pressure switches
- Time-delay technology with short-cycle protection to ensure quiet, reliable defrost
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- Factory-installed coil and ambient temperature sensors
- AHRI Certified
- ETL Listed



CABINET FEATURES

- Grille-style sound control top design
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Single panel access to controls with space provided for field-installed accessories
- Sweat connection service valves with easy access to gauge ports
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

NOTES

- R32 Outdoor



Submittal Data Sheet

17.2 SEER2 HP R32, 3 ton

DH7TCA3610

PERFORMANCE COMBINATION (HSVTC)

* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH7TCA3610	Outdoor Unit Name:	17.2 SEER2 HP R32, 3 ton
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):	34,800	* Rated Heating Capacity (Btu/hr):	34,400
* EER:		* EER2:	12.50
* SEER:		* SEER2:	17.20
* HSPF:	8.1	* HSPF2:	8.1
* Heating COP:			

OUTDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Two Stage
Min. Circuit Amps MCA (A):	20.8	Suction Valve Connection Size (inch):	7/8
Max Overcurrent Protection (MOP) (A):	35	Liquid Valve Connection Size (inch):	3/8
Running Load:		Sound Power (High) (dBA):	71
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	55 - 125
Holding Refrigerant Charge (ozs):	129	Heating Operation Range (°F DB):	-20 - 70
Additional Charge (ounces/ft):	0.58	Max. Pipe Length (Vertical) (ft):	80
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	150	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	262	Gross Weight (lb):	268
Dimensions (HxWxD) (in):	35.5 x 35-1/2 x 35.75		



Submittal Data Sheet
17.2 SEER2 HP R32, 3 ton
DH7TCA3610

DIMENSIONAL DRAWING

MODEL	DIMENSIONS		
	W"	D"	H"
DH7TCA2410A*	35½	35½	39 1/2
DH7TCA3610A*	35½	35½	35 3/4
DH7TCA4810A*	35½	35½	41 5/8
DH7TCA6010A*	35½	35½	41 5/8

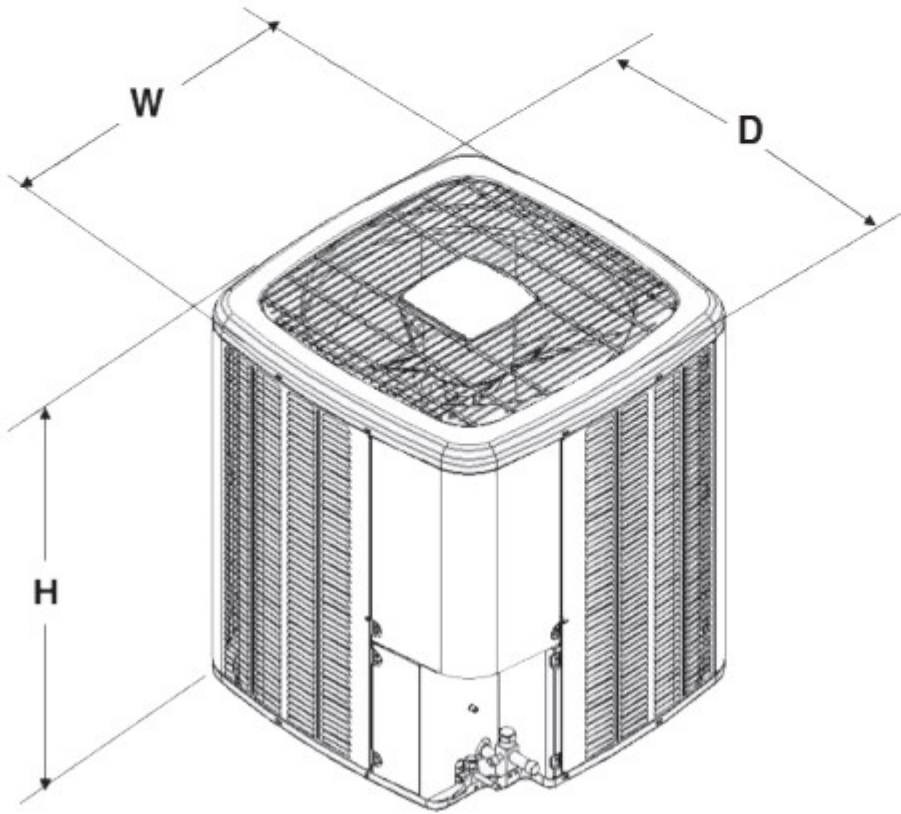



Submittal Data Sheet
17.2 SEER2 HP R32, 3 ton
DH7TCA3610

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
ABK-20	ANCHOR BRACKET KIT	No
CSR-U-1	Compressor Saver - Hard Start Kit - 1 TO 3 Ton	No
CSR-U-2	3 TO 5 TON COMP SAVER 25/CS	No
FSK01A	Freeze-Stat Kit	No
OT18-60A	Outdoor Thermostat Kit	No
TXV-FX-KX-3T	TXV-FX-KX-3T-Srv Kit	No