



Submittal Data Sheet

17.5 SEER2 HP R32,4 Ton

DH7VSA4810

STANDARD FEATURES

- Energy-Efficiency Compressor
- SmartShift technology to ensure quiet reliable defrost
- Enhanced aluminum fin coil with 5mm diameter copper tubes in 1.5 -to 3.5 ton
- Enhanced aluminum fin coil with 7mm diameter copper tubes in 4.0 -to 5.0 ton
- Factory-installed bi-flow liquid line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High and low-pressure switches
- Fully enclosed contactor with lug connection
- Single-speed PSC condenser fan motor
- Capacitor with extended life
- AHRI Certified
- ETL Listed

CABINET FEATURES

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

NOTES

- R32 Outdoor





Submittal Data Sheet

17.5 SEER2 HP R32,4 Ton

DH7VSA4810

PERFORMANCE COMBINATION (HSVTC)

* VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH7VSA4810	Outdoor Unit Name:	17.5 SEER2 HP R32,4 Ton
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):	46,500	* Rated Heating Capacity (Btu/hr):	47,500
* EER:		* EER2:	10.00
* SEER:		* SEER2:	17.50
* HSPF:		* HSPF2:	8.8
* Heating COP:	3.3		

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Min. Circuit Amps MCA (A):	37.5	Suction Valve Connection Size (inch):	7/8
Max Overcurrent Protection (MOP) (A):	40	Liquid Valve Connection Size (inch):	3/8
Fan/Compressor Drive Input:		Sound Power (High) (dBA):	71
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	0 - 115
Holding Refrigerant Charge (ozs):	118	Heating Operation Range (°F DB):	-10 - 70
Additional Charge (ounces/ft):		Max. Pipe Length (Vertical) (ft):	90
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	100	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	179	Gross Weight (lb):	194
Dimensions (HxWxD) (in):	39 x 37 x 12.625		

Submittal Data Sheet



17.5 SEER2 HP R32,4 Ton

DH7VSA4810

DIMENSIONAL DRAWING

DIMENSIONS

MODEL	DIMENSIONS		
	W"	D"	H"
DH7VSA3610A*	37	12 $\frac{1}{2}$	39
DH7VSA4210A*	37	12 $\frac{1}{2}$	39
DH7VSA4810A*	37	12 $\frac{1}{2}$	39
DH7VSA6010A*	37	12 $\frac{1}{2}$	56 $\frac{1}{2}$

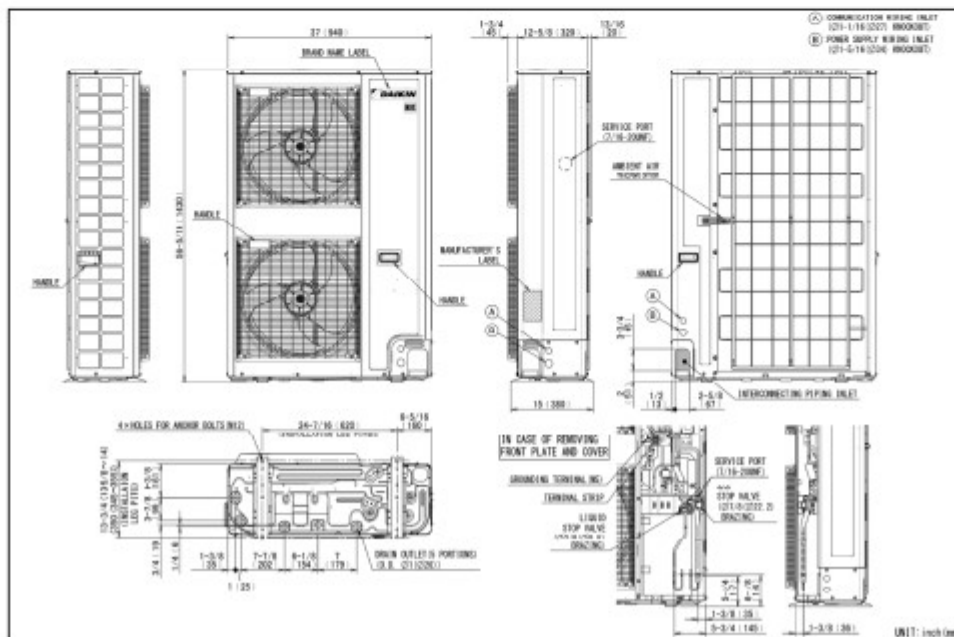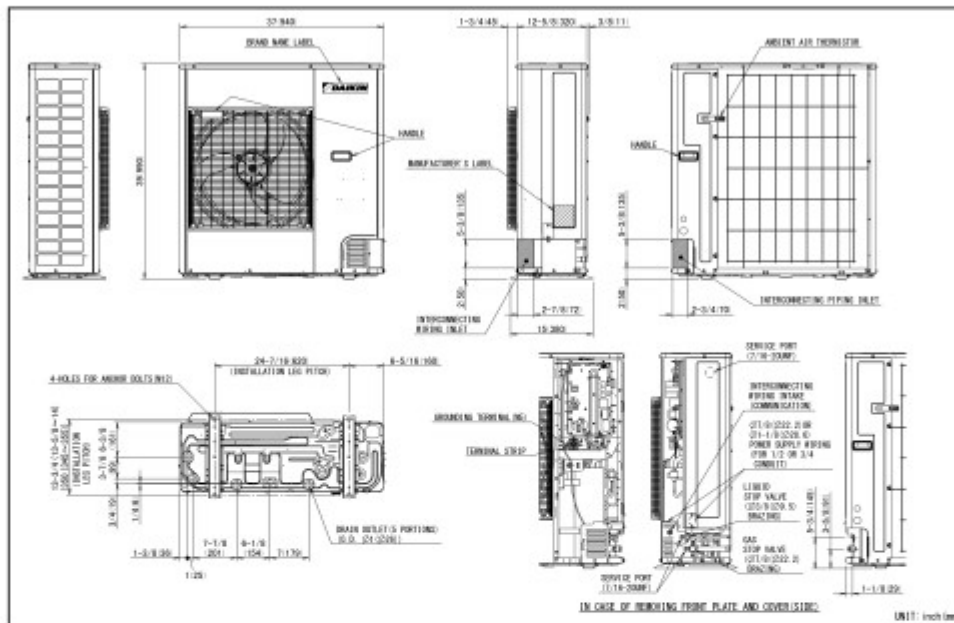



Submittal Data Sheet
17.5 SEER2 HP R32,4 Ton
DH7VSA4810

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
130-DK-008	Hail Guard	No
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
DQ-P-16-100	Daikin One Powered Ventilator	No
DSEN-HAQA	Daikin One Home Air Monitor	No
DTA119A73	D24V Gateway supports R-32 AC/HP for all SD brands, integrating with any furnace	No
KEH3P573567	Heater, Drain Pan, 5 Ton	No
KPS00601	Snow Guard Front	No
KPS00602	Snow Guard Rear	No
KPS00603	Snow Guard Side	No
KPS00604	Snow Guards - Complete Set	No
KPW5G112	Air Adjustment Grille/ Wind Baffle	No