



Submittal Data Sheet

R-32 Variable speed Air Handler

DMVT30BP1300

STANDARD FEATURES

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Variable-speed ECM blower motor
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Auto configuration of the airflow and tonnage in communicating mode
- All-aluminum evaporator coil
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- AHRI certified
- ETL listed
- 3 kW – 25 kW electric heater kits
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Optimized for use with R-32 refrigerant with factory installed leak detection sensor for A2L mitigation.



CABINET FEATURES

- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access



Submittal Data Sheet
R-32 Variable speed Air Handler
DMVT30BP1300

PERFORMANCE

Product Model No.	DMVT30BP1300	Product Model Name:	R-32 Variable speed Air Handler
Type:	Air Handler	Cooling Capacity (Nominal) (Btu/hr):	30,000
Blower Motor Rating (HP):	0.5		

PRODUCT DETAILS

Power Supply (V/Hz/Ph):	208/240 / 60 / 1	Airflow Rate (High) (CFM):	
Min. Circuit Amps MCA (A):		Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):		Liquid Valve Connection Size (inch):	3/8
Dimensions (HxWxD) (in):	53-7/16 x 17-9/16 x 21	Condensate Connection (inch):	
Net Weight (lb):	129	Blower Size Diameter (inch):	10
Gross Weight (lb):	127	Blower Size Width (inch):	6

HEATER KIT MODEL	CIRCUIT 1 (208V/240V)			CIRCUIT 2 (208V/240V)			SINGLE-POINT KIT (208V/240V)	
	HEATER AMPS	MCA ¹	MOP ²	HEATER AMPS	MCA ¹	MOP ²	MCA ¹	MOP ²
DMVT30BP1300AA	0/0	4.9/4.9	15/15	---	---	---	---	---
HKTSN03X1	10.8/12.5	18.4/20.5	20/25	---	---	---	---	---
HKTS*05X1	17.3/20.0	26.5/29.9	30/30	---	---	---	---	---
HKTSN06X1	21.7/25.0	32.0/36.1	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	41.0/46.5	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	48.2/54.9	50/60	---	---	---	---	---
HKTSD15XA/B	34.7/40.0	48.2/54.9	50/60	17.3/20.0	21.7/25.0	25/25	69.9/79.9	70/80


¹ Minimum Circuit Ampacity (Heater Amps + Motor Amps) X 1.25
² Maximum Overcurrent Protection = 2.25 X Motor Amps + Heater Amps
[^] Three-phase Heater Kits (Circuit 1: Single-phase for Air Handlers Circuit 2: Three-phase for Heater Kits)
* D - Service disconnect, N - No service disconnect
--- indicates Not Required
Note: The 208 or 240 in the heat kit part number field is for clarification of the nominal voltage for this model.

Submittal Data Sheet

R-32 Variable speed Air Handler

DMVT30BP1300

DIMENSIONAL DRAWING

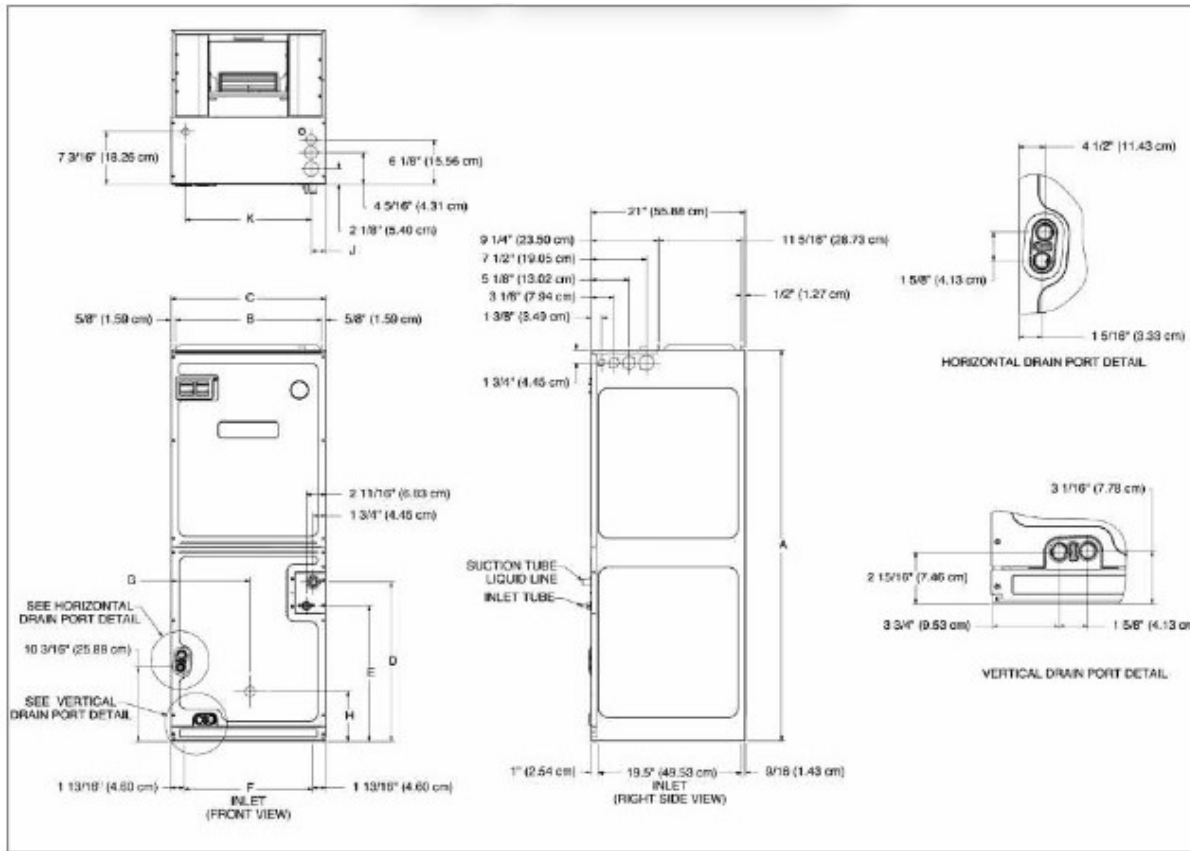

MODEL	A"	B"	C"	D"	E"	F"	G"	H"	J"	K"
DMVT24BP1300	45	16 5/16	17 9/16	15 1/4	12	12 1/2	9	12 7/16	2	13 3/4
DMVT30BP1300	53 7/16	16 5/16	17 9/16	23 11/16	20 3/16	12 1/2	9	12 1/2	2	13 3/4
DMVT36BP1300	53 7/16	16 5/16	17 9/16	23 11/16	20 3/16	12 1/2	9	12 1/2	2	13 3/4
DMVT36CP1300	49	19 1 1/16	21 1/8	21 1 1/16	17 1/2	16 3/16	9	12 1/2	2	17 1/2
DMVT42CP1300	53 7/16	19 1 1/16	21 1/8	21 1 1/16	18 1/2	16 3/16	9	12 1/2	2	17 1/2
DMVT48CP1300	58	19 1 1/16	21 1/8	26 7/16	22 1 1/16	14 10/16	10 13/16	6 13/16	2	17 1/2
DMVT60DP1300	58	23 3/16	24 1/8	26	22 1/2	17 1 1/16	12 7/16	13 1 1/16	2	20 1/2



Submittal Data Sheet
R-32 Variable speed Air Handler
DMVT30BP1300

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
ALFH16201E	16X20X1 Permanent Washable Filter	No
CMK0019	Recommended for prevention of condensate blow off from blower housing	No
DFKE-02	Downflow Kit	No
HHK0004	Recommended for installations in High Humidity regions to prevent blowoff from coil	No
SPW-01	Single Point Kit	No
UVPK02	Air Handler UV-C Light Kit	No