



Submittal Data Sheet

R-32 Variable speed Air Handler

DMVT42CP1300

STANDARD FEATURES

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Variable-speed ECM blower motor
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Auto configuration of the airflow and tonnage in communicating mode
- All-aluminum evaporator coil
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- AHRI certified
- ETL listed
- 3 kW – 25 kW electric heater kits
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Optimized for use with R-32 refrigerant with factory installed leak detection sensor for A2L mitigation.



CABINET FEATURES

- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access



Submittal Data Sheet
R-32 Variable speed Air Handler
DMVT42CP1300

PERFORMANCE

Product Model No.	DMVT42CP1300	Product Model Name:	R-32 Variable speed Air Handler
Type:	Air Handler	Cooling Capacity (Nominal) (Btu/hr):	42,000
Blower Motor Rating (HP):	3/4		

PRODUCT DETAILS


Power Supply (V/Hz/Ph):	208/240 / 60 / 1	Airflow Rate (High) (CFM):	
Min. Circuit Amps MCA (A):		Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):		Liquid Valve Connection Size (inch):	3/8
Dimensions (HxWxD) (in):	53-7/16 x 21-1/8 x 21	Condensate Connection (inch):	
Net Weight (lb):	153	Blower Size Diameter (inch):	10
Gross Weight (lb):	143	Blower Size Width (inch):	8

HEATER KIT MODEL	CIRCUIT 1 (208V/240V)			CIRCUIT 2 (208V/240V)			SINGLE-POINT KIT (208V/240V)	
	HEATER AMPS	MCA ¹	MOP ²	HEATER AMPS	MCA ¹	MOP ²	MCA ¹	MOP ²
DMVT42CP1300AA	0/0	6.5/6.5	15/15	---	---	---	---	---
HKTS*05X1	17.3/20.0	28.2/31.5	30/35	---	---	---	---	---
HKTSN06X1	21.7/25.0	33.6/37.8	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	42.6/48.2	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	49.8/56.5	50/60	---	---	---	---	---
HKTS*15X3 ^	0/0	6.5/6.5	15/15	30.0/34.6	37.5/43.3	40/45	---	---
HKTS D15XA/B	34.7/40.0	49.9/56.5	50/60	17.3/20.0	21.7/25.0	25/25	71.5/81.5	80/90
HKTS D19CA/B	34.7/40.0	49.9/56.5	50/60	34.7/40.0	43.3/50.0	45/50	93.2/107	100/110

¹ Minimum Circuit Ampacity (Heater Amps + Motor Amps) X 1.25
² Maximum Overcurrent Protection = 2.25 X Motor Amps + Heater Amps
^ Three-phase Heater Kits (Circuit 1: Single-phase for Air Handlers Circuit 2: Three-phase for Heater Kits)
* D - Service disconnect, N - No service disconnect
--- indicates Not Required
Note: The 208 or 240 in the heat kit part number field is for clarification of the nominal voltage for this model.

Submittal Data Sheet R-32 Variable speed Air Handler DMVT42CP1300

DIMENSIONAL DRAWING

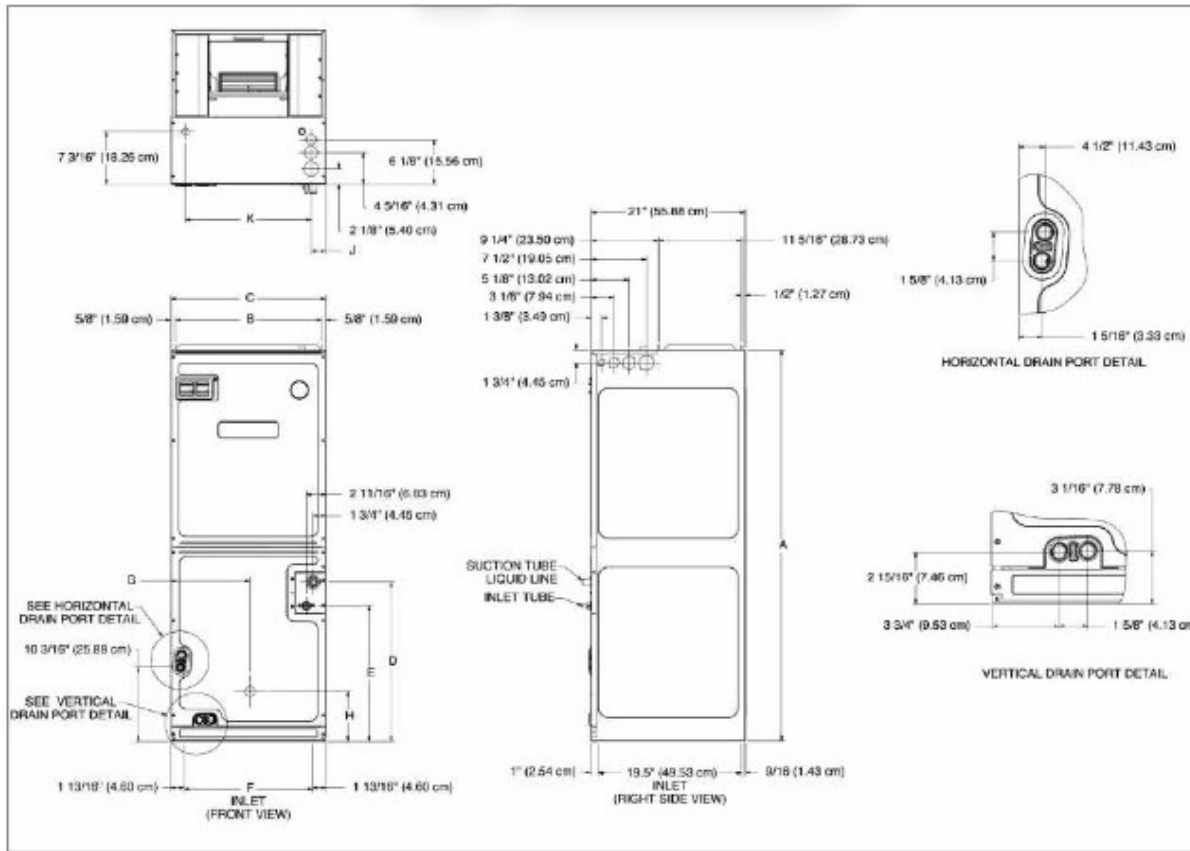

MODEL	A"	B"	C"	D"	E"	F"	G"	H"	I"	J"
DMVT24BP1300	45	16 ⁵ / ₁₆	17 ⁹ / ₁₆	15 ¹ / ₄	12	12 ¹ / ₂	9	12 ⁹ / ₁₆	2	13 ¹ / ₄
DMVT30BP1300	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ³ / ₁₆	12 ¹ / ₂	9	12 ⁹ / ₁₆	2	13 ¹ / ₄
DMVT36BP1300	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ³ / ₁₆	12 ¹ / ₂	9	12 ⁹ / ₁₆	2	13 ¹ / ₄
DMVT36CP1300	49	19 ¹³ / ₁₆	21 ¹ / ₈	21 ¹² / ₁₆	17 ¹ / ₂	16 ³ / ₁₆	9	12 ⁹ / ₁₆	2	17 ¹ / ₈
DMVT42CP1300	53 ⁷ / ₁₆	19 ¹³ / ₁₆	21 ¹ / ₈	21 ¹² / ₁₆	18 ¹ / ₂	16 ³ / ₁₆	9	12 ⁹ / ₁₆	2	17 ¹ / ₈
DMVT48CP1300	58	19 ¹³ / ₁₆	21 ¹ / ₈	26 ⁷ / ₁₆	22 ¹⁵ / ₁₆	14 ¹⁰ / ₁₆	10 ¹³ / ₁₆	6 ¹³ / ₁₆	2	17 ¹ / ₈
DMVT60DP1300	58	23 ³ / ₁₆	24 ¹ / ₈	26	22 ¹ / ₂	17 ¹¹ / ₁₆	12 ⁹ / ₁₆	13 ¹³ / ₁₆	2	20 ¹ / ₈



Submittal Data Sheet
R-32 Variable speed Air Handler
DMVT42CP1300

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
ALFH1912201E	19.5X20X1 Permanent Washable Filter	No
CMK0019	Recommended for prevention of condensate blow off from blower housing	No
DFKE-02	Downflow Kit	No
HHK0005	Recommended for installations in High Humidity regions to prevent blowoff from coil	No
SPW-01	Single Point Kit	No
UVPK04	Air Handler UV-C Light Kit	No