



## Submittal Data Sheet

R-32 Variable speed Air Handler

DMVT60DP1300

### STANDARD FEATURES

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Variable-speed ECM blower motor
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Auto configuration of the airflow and tonnage in communicating mode
- All-aluminum evaporator coil
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- AHRI certified
- ETL listed
- 3 kW – 25 kW electric heater kits
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Optimized for use with R-32 refrigerant with factory installed leak detection sensor for A2L mitigation.



### CABINET FEATURES

- Cabinet air leakage less than 2.0% at 1.0 inch H<sub>2</sub>O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H<sub>2</sub>O when tested in accordance with ASHRAE standard 193
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access



## Submittal Data Sheet

R-32 Variable speed Air Handler

DMVT60DP1300

### PERFORMANCE

|                           |              |                                      |                                 |
|---------------------------|--------------|--------------------------------------|---------------------------------|
| Product Model No.         | DMVT60DP1300 | Product Model Name:                  | R-32 Variable speed Air Handler |
| Type:                     | Air Handler  | Cooling Capacity (Nominal) (Btu/hr): | 60,000                          |
| Blower Motor Rating (HP): | 1            |                                      |                                 |

### PRODUCT DETAILS

|                                       |                  |                                       |     |
|---------------------------------------|------------------|---------------------------------------|-----|
| Power Supply (V/Hz/Ph):               | 208/240 / 60 / 1 | Airflow Rate (High) (CFM):            |     |
| Min. Circuit Amps MCA (A):            |                  | Suction Valve Connection Size (inch): | 3/4 |
| Max Overcurrent Protection (MOP) (A): |                  | Liquid Valve Connection Size (inch):  | 3/8 |
| Dimensions (HxWxD) (in):              | 58 x 24-5/8 x 21 | Condensate Connection (inch):         |     |
| Net Weight (lb):                      | 167              | Blower Size Diameter (inch):          | 11  |
| Gross Weight (lb):                    | 179              | Blower Size Width (inch):             | 10  |

| HEATER KIT MODEL | CIRCUIT 1 (208V/240V) |                  |                  | CIRCUIT 2 (208V/240V) |                  |                  | SINGLE-POINT KIT (208V/240V) |                  |
|------------------|-----------------------|------------------|------------------|-----------------------|------------------|------------------|------------------------------|------------------|
|                  | HEATER AMPS           | MCA <sup>1</sup> | MOP <sup>2</sup> | HEATER AMPS           | MCA <sup>1</sup> | MOP <sup>2</sup> | MCA <sup>1</sup>             | MOP <sup>2</sup> |
| DMVT60DP1300AA   | 0/0                   | 8.6/8.6          | 15/15            | ---                   | ---              | ---              | ---                          | ---              |
| HKTS*05X1        | 17.3/20.0             | 30.3/33.6        | 35/35            | ---                   | ---              | ---              | ---                          | ---              |
| HKTSN06X1        | 21.7/25.0             | 35.7/39.9        | 40/40            | ---                   | ---              | ---              | ---                          | ---              |
| HKTS*08X1        | 28.9/33.3             | 44.7/50.3        | 45/60            | ---                   | ---              | ---              | ---                          | ---              |
| HKTS*10X1        | 34.7/40.0             | 52.0/58.6        | 60/60            | ---                   | ---              | ---              | ---                          | ---              |
| HKTS*15X3 ^      | 0/0                   | 8.6/8.6          | 15/15            | 30.0/34.6             | 37.5/43.3        | 40/45            | ---                          | ---              |
| HKTS*15XA/B      | 34.7/40.0             | 52.0/58.6        | 60/60            | 17.3/20.0             | 21.6/25.0        | 25/25            | 73.6/83.6                    | 80/90            |
| HKTS*20X3 ^      | 0/0                   | 8.6/8.6          | 15/15            | 37.5/43.3             | 46.9/54.1        | 50/60            | ---                          | ---              |
| HKTS*20XA/B      | 34.7/40.0             | 52.0/58.6        | 60/60            | 34.7/40.0             | 43.4/50.0        | 45/50            | 95.3/109                     | 100/110          |
| HKTS*25XA/B      | 34.7/40.0             | 52.0/58.6        | 80/90            | 34.7/40.0             | 43.4/50.0        | 45/50            | 117/134                      | 125/150          |

<sup>1</sup> Minimum Circuit Ampacity (Heater Amps + Motor Amps) X 1.25

<sup>2</sup> Maximum Overcurrent Protection = 2.25 X Motor Amps + Heater Amps

^ Three-phase Heater Kits (Circuit 1: Single-phase for Air Handlers Circuit 2: Three-phase for Heater Kits)

\* D - Service disconnect, N - No service disconnect

--- indicates Not Required


Note: The 208 or 240 in the heat kit part number field is for clarification of the nominal voltage for this model.

# Submittal Data Sheet

## R-32 Variable speed Air Handler

### DMVT60DP1300

## DIMENSIONAL DRAWING

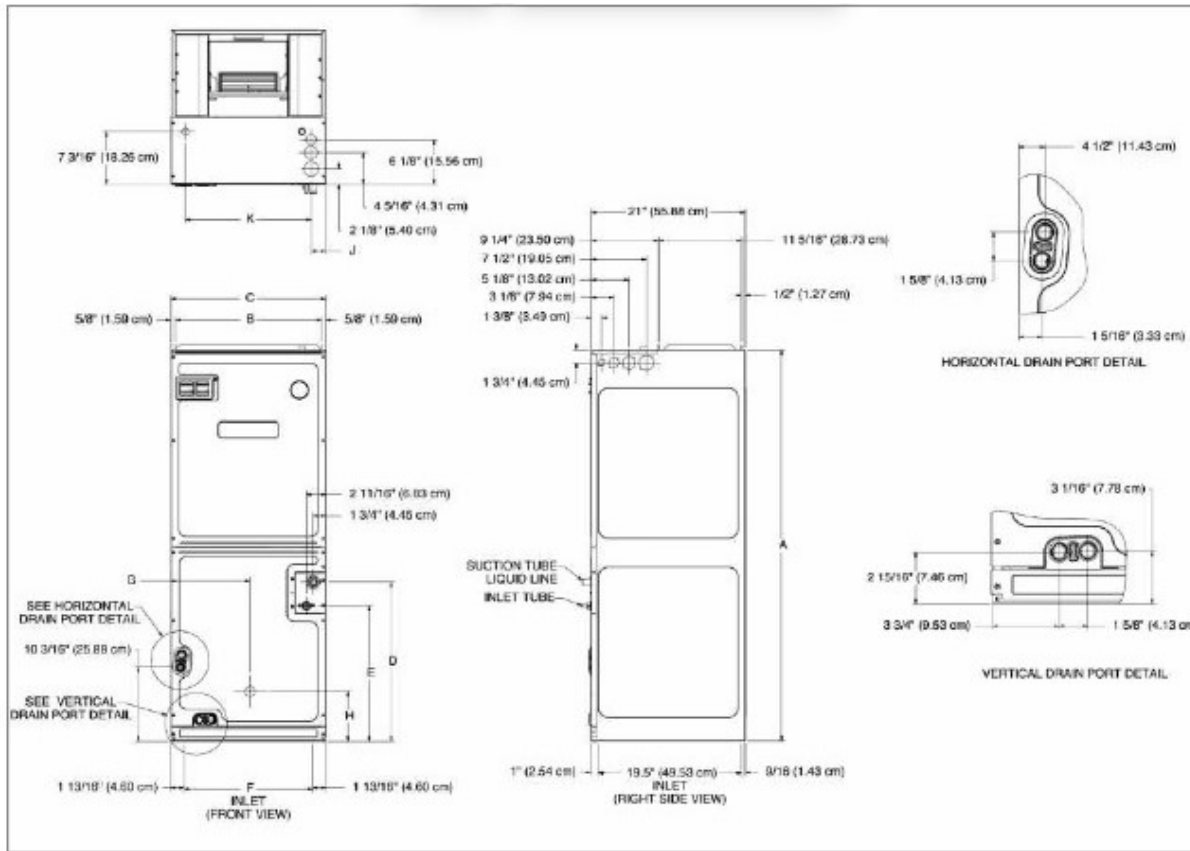

| MODEL        | A"      | B"        | C"      | D"        | E"        | F"        | G"        | H"        | I" | K"     |
|--------------|---------|-----------|---------|-----------|-----------|-----------|-----------|-----------|----|--------|
| DMVT24BP1300 | 45      | 16 5/16   | 17 9/16 | 15 1/4    | 12        | 12 1/2    | 9         | 12 7/16   | 2  | 13 3/4 |
| DMVT30BP1300 | 53 7/16 | 16 5/16   | 17 9/16 | 23 11/16  | 20 3/16   | 12 1/2    | 9         | 12 1/2    | 2  | 13 3/4 |
| DMVT36BP1300 | 53 7/16 | 16 5/16   | 17 9/16 | 23 11/16  | 20 3/16   | 12 1/2    | 9         | 12 1/2    | 2  | 13 3/4 |
| DMVT36CP1300 | 49      | 19 1 1/16 | 21 1/8  | 21 1 1/16 | 17 1/2    | 16 3/16   | 9         | 12 1/2    | 2  | 17 1/2 |
| DMVT42CP1300 | 53 7/16 | 19 1 1/16 | 21 1/8  | 21 1 1/16 | 18 1/2    | 16 3/16   | 9         | 12 1/2    | 2  | 17 1/2 |
| DMVT48CP1300 | 58      | 19 1 1/16 | 21 1/8  | 26 7/16   | 22 1 1/16 | 14 10/16  | 10 1 1/16 | 6 1 1/16  | 2  | 17 1/2 |
| DMVT60DP1300 | 58      | 23 3/16   | 24 1/8  | 26        | 22 1/2    | 17 1 1/16 | 12 7/16   | 13 1 1/16 | 2  | 20 1/2 |



**Submittal Data Sheet**  
R-32 Variable speed Air Handler  
DMVT60DP1300

ACCESSORIES

| PART<br>NUMBER | DESCRIPTION                                                                         | INCLUDED |
|----------------|-------------------------------------------------------------------------------------|----------|
| ALFH20231E     | 20X23X1 Permanent Washable Filter                                                   | No       |
| CMK0020        | Recommended for prevention of condensate blow off from blower housing               | No       |
| DFKE-03        | Downflow Kit                                                                        | No       |
| HHK0007        | Recommended for installations in High Humidity regions to prevent blowoff from coil | No       |
| SPW-01         | Single Point Kit                                                                    | No       |
| UVPK07         | Air Handler UV-C Light Kit                                                          | No       |