



Submittal Data Sheet

R-32 4.0-Ton Multi-Position Air Handler Heat Pump SkyAir System

FTA48AAVJUD-RZA48AAVJU

FEATURES

- All Aluminum Coil
- Less than 2% Air Leakage
- External Static Pressure up to 0.9 in. w.g.
- Optional Outside Air integration
- Factory integrated Refrigerant Leak Detection
- Factory Installed Disconnect Option (D-Model)
- Anti Corrosion Treatment on Heat Exchanger
- Dependable cooling and heating from -4F to 122F

BENEFITS

- Upflow, downflow, horizontal right and horizontal left installation configurations
- Wide line of 3W to 19W optional electric heat
- 10 Year Parts and Compressor Warranty
- Long Pipe Lengths allow layout flexibility

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

R-32 4.0-Ton Multi-Position Air Handler Heat Pump SkyAir System
FTA48AAVJUD-RZA48AAVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTA48AAVJUD	Indoor Unit Name:	Sky-Air R32 4.0 ton Multi-Position Air Handler
Outdoor Unit Model No.	RZA48AAVJU	Outdoor Unit Name:	R-32 SkyAir 4.0 T Heat Pump Single Zone
Rated Cooling Capacity (Btu/hr):	47,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	32,000	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	5.280		
SEER2 (Non-Ducted/Ducted):	/ 15.20	HSPF2 (Non-Ducted/Ducted):	/ 9.0
EER2 (Non-Ducted/Ducted):	/ 8.90		
Rated Heating Capacity (Btu/hr):	55,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	23 - 122
Holding Refrigerant Charge (lbs):	7.5 LB	Heating Operation Range (°F WB):	-4 - 60
Additional Charge (oz/ft):		Max. Pipe Length (Vertical) (ft):	98
Pre-charge Piping (Length) (ft):	25	Cooling Range w/Baffle (°F DB):	23 - 122
Max. Pipe Length (Total) (ft):	230		
Max Height Separation (Ind to Ind ft):	0		




Submittal Data Sheet
R-32 4.0-Ton Multi-Position Air Handler Heat Pump SkyAir System
FTA48AAVJUD-RZA48AAVJU

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1520/1,290/1,060
Power Supply Connections:	F1, F2	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	See page 6 for electrical	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	See page 6 for electrical	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	53.43 x 21 x 21	Condensate Connection (inch):	3/4
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L) (dBA):	54/50/46
Net Weight (lb):	143	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

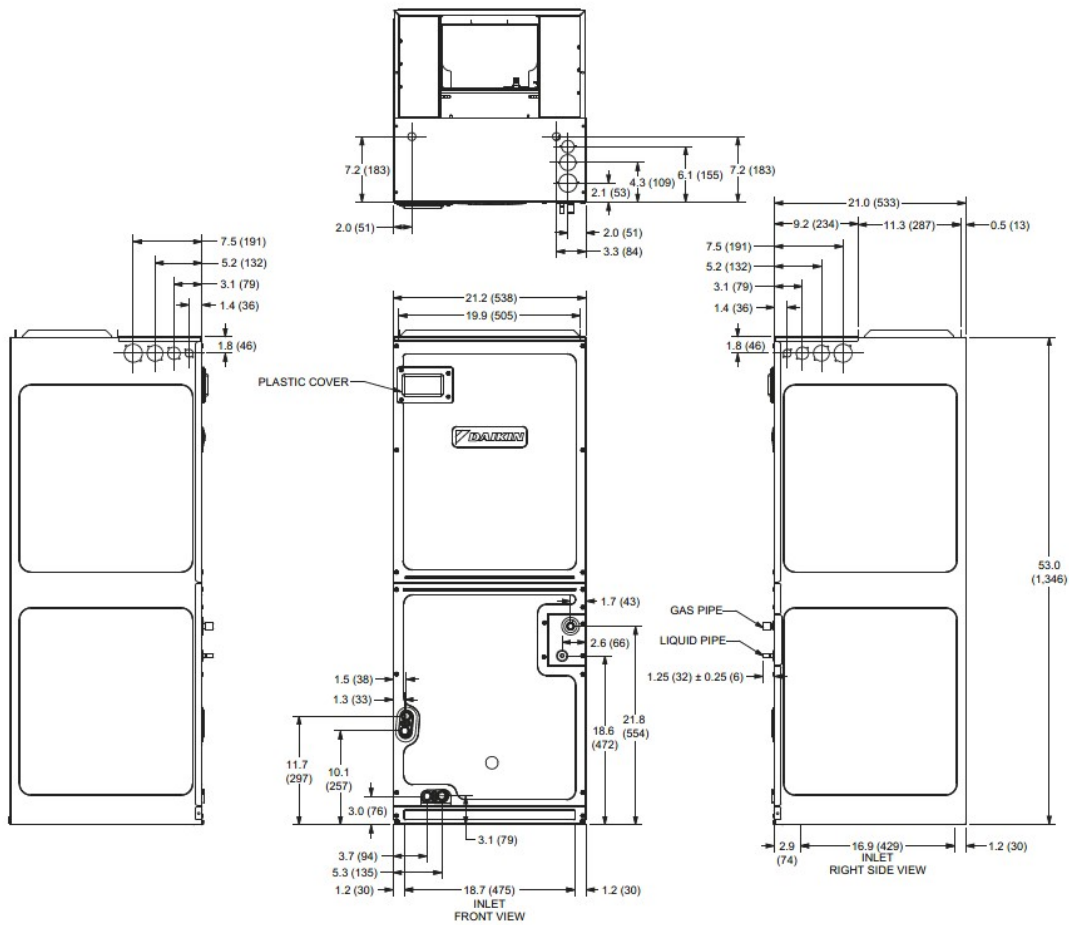


Submittal Data Sheet

R-32 4.0-Ton Multi-Position Air Handler Heat Pump SkyAir System
FTA48AAVJUD-RZA48AAVJU

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	H1, H2	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	34.6	Airflow Rate (H) (CFM):	3000
Max Overcurrent Protection (MOP) (A):	35	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	56
Dimensions (HxWxD) (in):	34-1/4 x 43-5/16 x 18-1/8	Sound Power Level (dBA):	
Net Weight (lb):	234		

DIMENSIONAL DRAWING - OUTDOOR UNIT

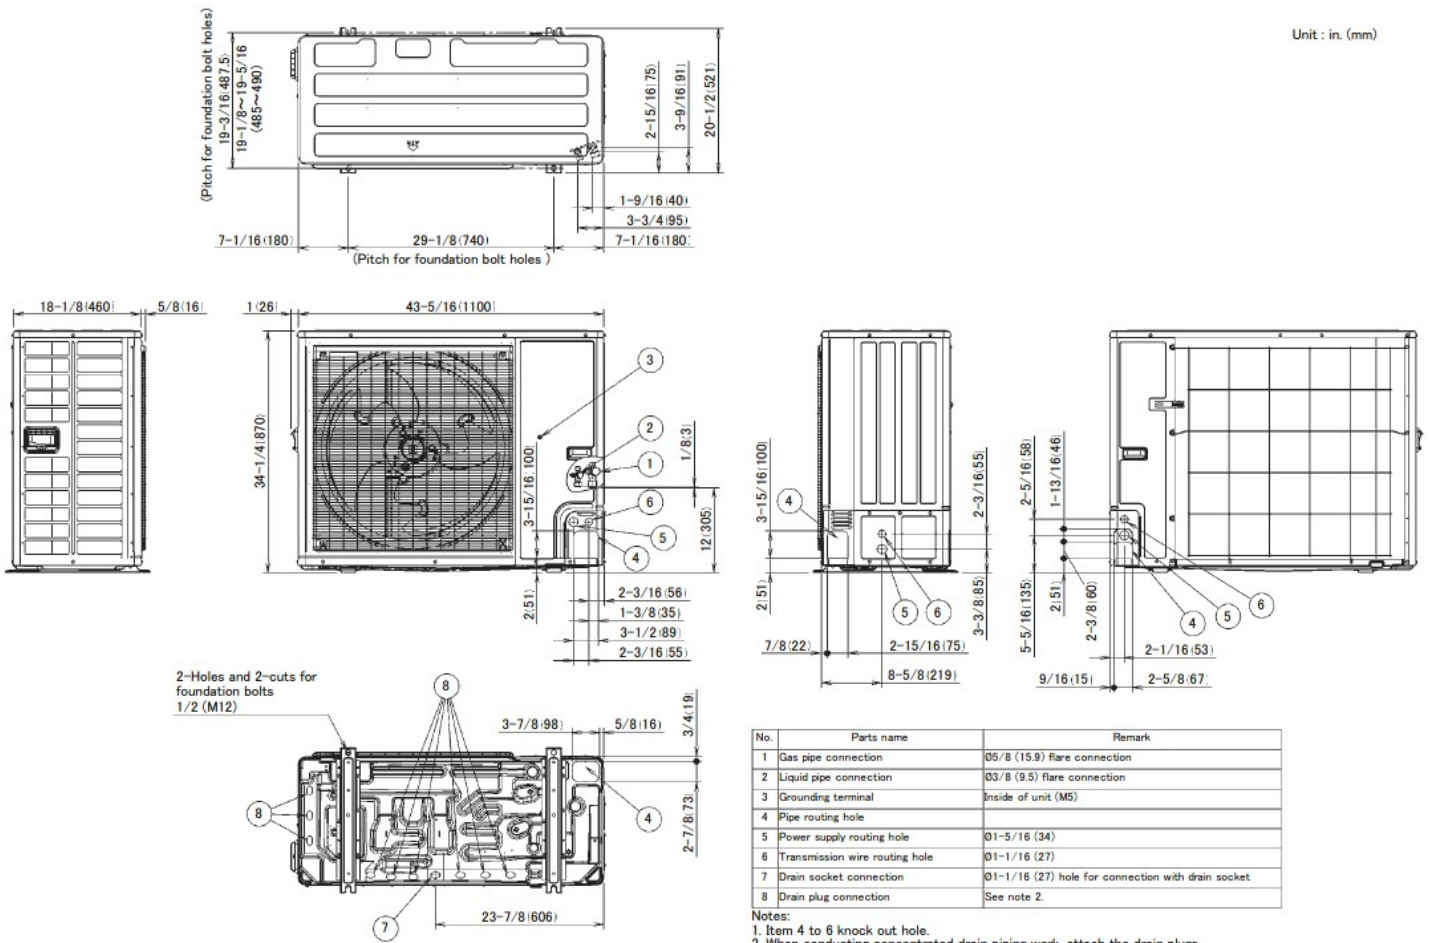



Submittal Data Sheet

R-32 4.0-Ton Multi-Position Air Handler Heat Pump SkyAir System

FTA48AAVJUD-RZA48AAVJU

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC1NRV71	R32 Navigation Remote Controller	No
BRP9A71	Ventilation and alarm adapter	No
BRP9A72	Ventilation and alarm adapter	No
HKTSD05X1	Electric Heat Kit, 5 KW	No
HKTSD08X1	Electric Heat Kit, 8 KW	No
HKTSD10X1	Electric Heat Kit, 10 KW	No
HKTSN05X1	Electric Heat Kit, 5 KW, 1 PH	No
HKTSN06X1	Electric Heat Kit, 6 KW, 1 PH	No
HKTSN08X1	Electric Heat Kit, 8 KW, 1 PH	No
HKTSN10X1	Electric Heat Kit, 10 KW, 1 PH	No
KRCS01-6B	Remote Sensor	No
KRP1BB101	Adaptor PCB Installation Box	No
KRP1C77	Wiring Adapter PCB	No
KRP4A74	Group Control Adaptor PCB (Installation box for adaptor PCB "KRP1BB101" is necessary)	No
KRP4A93	Adaptor PCB Installation Box	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRP2A82	ABC Terminal for VRV IV S	No

MODEL	CIRCUIT 1			CIRCUIT 2			SINGLE E-POINT KIT	
	AMPS	MCA	MOP	AMPS	MCA	MOP	MCA	MOP
FTA48AAVJUD FTA48AAVJUA	0/0	6.5/6.5	15/15	—	—	—	—	—
HKTS*05X1	17.3/20.0	28.2/31.5	30/35	—	—	—	—	—
HKTSN06X1	21.7/25.0	33.6/37.8	35/40	—	—	—	—	—
HKTS*08X1	28.9/33.3	42.6/48.2	45/50	—	—	—	—	—
HKTS*10X1	34.7/40.0	49.8/56.5	50/60	—	—	—	—	—
HKTSD15XA/B	34.7/40.0	49.8/56.5	50/60	17.3/20.0	21.6/25.0	25/25	71.5/81.5	80/90
HKTSD19CA/B	34.7/40.0	49.8/56.5	50/60	34.7/40.0	43.4/50.0	45/50	93.2/107	100/110

Note:

- 1. AMPS indicates heater amp draw.
- 2. Circuit 1 indicates single point power connection requirements when using a single stage electric heater. Circuit 1 powers both the FTA printed circuit board as well as the 1st stage of heat.
- 3. Circuit 2 indicates the power requirements for a second power point connection when using a two stage heater (15 kW and above).
- 4. Consult installation manual when using electric heater with FTA18 - 36AAVJUD models.