



***R-32 Standard Efficiency Heat Pump
Direct-Drive Packaged Rooftop Unit
15-20 Ton DSH Light Commercial
15 - 20 Ton, Up To 10.6 EER / 14.5 IEER***



R32

* Complete warranty details available from your local distributor or manufacturer's representative or at www.daikincomfort.com

A woman with blonde hair tied in a bun, wearing a light-colored business suit, is looking down at a clipboard she is holding. She is standing on a staircase with a metal railing. The background is slightly blurred, showing the steps of the staircase.

Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.


The group philosophy of the company includes:

- » Creating new value continuously for customers
- » Developing world leading energy-saving technology
- » Being a flexible and dynamic organization
- » Allowing employees to be the driving force for the success of the company
- » Fostering an atmosphere of best practices, boldness, and innovation
- » Thinking and acting globally



Contents

2	Introduction	2
4	Nomenclature	4
5	Features and Benefits	5
	Applications	8
	Serviceability	8
9	Product Specifications	9
	Coil Dimensions	11
	AHRI Ratings	11
	Sound Data	11
12	Dimensional Data	12
14	Expanded Cooling Data	14
20	Air Flow Data	20
33	Heating Data	33
34	Electrical Data	34
37	Electric Heat	37
41	Wiring Diagrams	41
44	Unit Clearances	44
45	Installation	45
	Weights	45

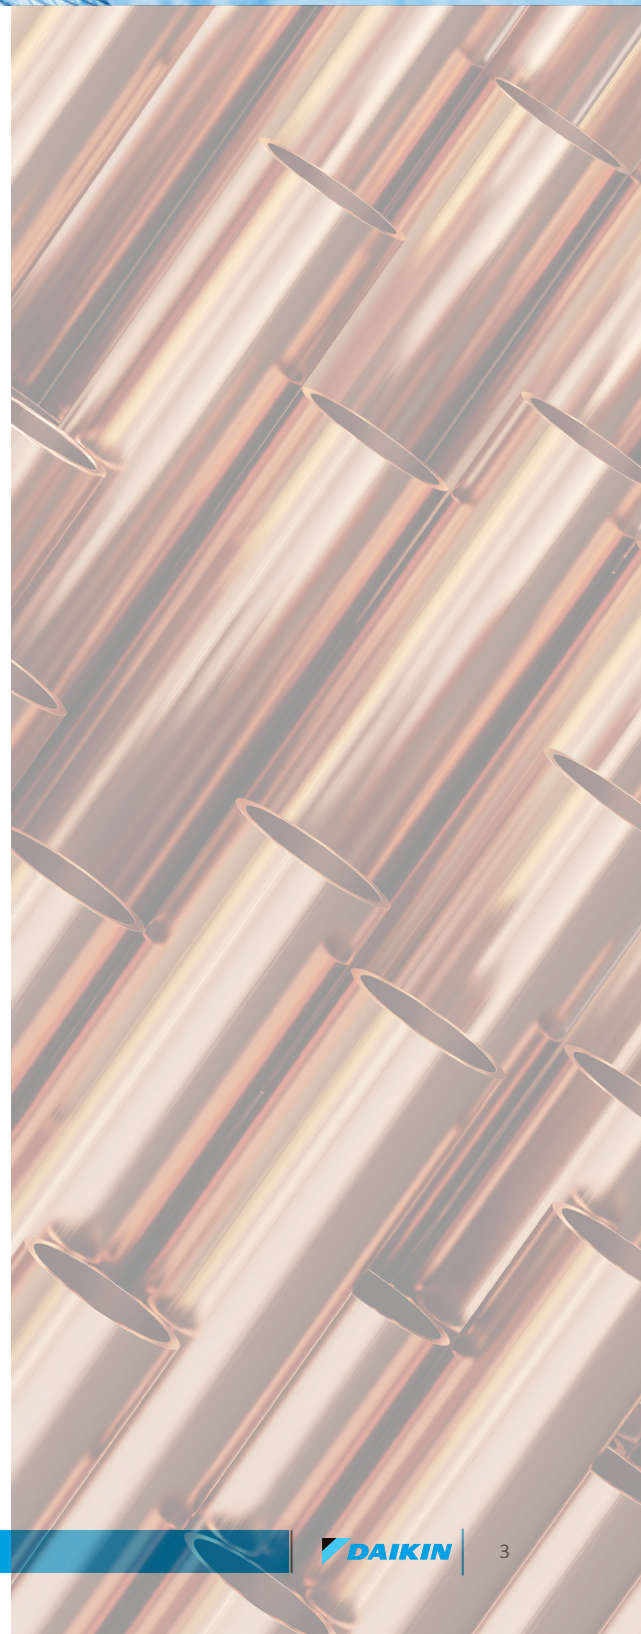

Nomenclature

	D	S	H	120	3	S	400	C	A	A	X	X	X	X	X	X	X	X	A	*
	1	2	3	4,5,6	7	8	9,10,11	12	13	14	15	16	17	18	19	20	21	22	23	24
Revision Levels																				
Major & Minor																				
No Options																				
PE Connection																				
No Options																				
Single point power connection for Power Exhaust																				
Single point power connection for Power Exhaust (w/ Transformer)																				
IAQ																				
No Options																				
Service Options																				
Powered convenience outlet																				
Non-powered convenience outlet																				
Hinge Panels																				
D Hinged Panels and Powered convenience outlet																				
E Hinged Panels and non-powered convenience outlet																				
No Options																				
Electrical																				
No Options																				
Non-Fused Disconnect																				
Phase Monitor																				
Thru-the-base connections																				
SCCR																				
Non-Fused Disconnect and Phase Monitor																				
Non-Fused Disconnect and Thru-the-base connections																				
Non-Fused Disconnect and SCCR																				
Phase Monitor and Thru-the-base connections																				
Phase Monitor and SCCR																				
Thru-the-base connections and SCCR																				
Non-Fused Disconnect, Thru-the-base connections and Phase Monitor																				
Non-Fused Disconnect, Phase Monitor and SCCR																				
Non-Fused Disconnect, Thru-the-base connections and SCCR																				
Phase Monitor, Thru-the-base connections and SCCR																				
Non-Fused Disconnect, Thru-the-base connections, Phase Monitor and SCCR																				
Economizer																				
No Options																				
Ultra Low-Leak Downflow Economizer w/ Enthalpy Sensor																				
Ultra Low-Leak Internal Horizontal Economizer w/ Enthalpy Sensor																				
Ultra Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor																				
Ultra Low-Leak Horizontal Economizer for DDC controls w/ Enthalpy Sensor																				
Ultra Low-Leak Downflow Economizer w/ Dry Bulb Sensor																				
Ultra Low-Leak Internal Horizontal Economizer w/ Dry Bulb Sensor																				
Ultra Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor																				
Ultra Low-Leak Horizontal Economizer for DDC controls w/ Dry Bulb Sensor																				
Coils, Hail guard																				
No Options																				
Hail Guard																				
Sensors																				
R-32 Sensor																				
RA Smoke Detector w/ R32 Sensor																				
SA Smoke Detector w/ R32 Sensor																				
RA & SA Smoke Detector w/ R32 Sensor																				

Brand																				
Daikin																				
Configuration																				
R-32 Standard Efficiency																				
R-32 High Efficiency																				
Inverter (variable speed compressor)																				
Application																				
Cooling																				
Gas Heat																				
Heat Pump																				
Nominal Cooling Capacity																				
036 3 Tons 090 7½ Tons 180 15 Tons																				
048 4 Tons 102 8½ Tons 240 20 Tons																				
060 5 Tons 120 10 Tons 300 25 Tons																				
072 6 Tons 150 12½ tons																				
Voltage																				
1 208-230/1/60 4 460/3/60																				
3 208-230/3/60 7 575/3/60																				
Supply Fan/Drive Type/Motor																				
Direct Drive- Standard Static L Direct Drive-Medium Static																				
Direct Drive- High Static																				
Nominal Heating Capacity																				
Gas/Electric A/C/H/P Factory-Installed Electric Heat																				
045 45,000 BTU/h XXX No Heat																				
060 60,000 BTU/h 005 5kW																				
070 70,000 BTU/h 010 10 kW																				
080 80,000 BTU/h 015 15 kW																				
090 90,000 BTU/h 020 20 kW																				
100 100,000 BTU/h 030 30 kW																				
115 115,000 BTU/h 045 45 kW																				
125 125,000 BTU/h 060 60 kW																				
130 130,000 BTU/h 075 75kW																				
Electric Heat w/ SCR controls																				
180 180,000 BTU/h S05 5kW S30 30 kW																				
210 210,000 BTU/h S10 10 kW S45 45 kW																				
225 225,000 BTU/h S20 20 kW S60 60 kW																				
240 240,000 BTU/h S22 20 kW S75 75kW																				
260 260,000 BTU/h S25 25 kW																				
350 350,000 BTU/h																				
360 360,000 BTU/h																				
400 400,000 BTU/h																				
480 480,000 BTU/h																				
See product specifications for heat size(s) available for each capacity.																				
Refrigeration Systems																				
Single stage cooling modes																				
Two stage cooling modes																				
Two stage cooling modes with Hot Gas Reheat and Low-ambient control																				
Single stage cooling mode with Low-ambient controller																				
Two stage cooling mode with Low-ambient controller																				
Inverter (variable speed compressor)																				
Inverter hot gas reheat (variable speed compressor)																				
Heat Exchanger																				
No options U Ultra Low No _x																				
Standard Aluminized Exchanger																				
Stainless Steel Exchanger																				
Controls																				
Electromechanical controls																				
DDC w/ BACnet interface																				
Inverter with Single-Zone Variable Air Volume (SZ VAV)																				
Inverter with Multi-Zone Variable Air Volume (MZ VAV)																				
Inverter with DKN+ (SZ VAV)																				
Inverter with DKN+ (3rd Party Thermostat)																				

Daikin Packaged Rooftop Units (RTUs) are built to perform, with features and options that help provide low installation and operation costs, superior indoor air quality, efficient operation, and longevity.

Installation

Daikin Packaged units are designed with fast and easy installation in mind and are ideal for both new construction and retrofit projects.

Cabinet Construction

Daikin packaged rooftop units are made with high quality galvanized steel with a powder-paint finish to provide higher corrosion resistance.

- » Unit fully insulated to prevent sweating and thermal losses, using our foil face fiberglass insulation which also omits exposed filter fibers into the airstream.
- » The full perimeter base rail is built using heavy gauge galvanized steel for a stronger structural installation. The base rails are a minimum of 3 ½" tall and include holes to allow for overhead rigging and lifting with forklifts.
- » Electrical lines can be brought through the base of the unit or through the horizontal knockout for easy installation and accessibility on the field

Compressor

High performance, low noise scroll compressors with stage control to match the required total load for efficient part load control.

- » Resiliently factory-mounted on rubber grommets for vibration isolation.
- » Refrigeration circuits include both high and low pressure safety switches.
- » Unit is factory charged with environmental friendly and sustainable low GWP R-32 refrigerant.
- » Independent refrigeration circuits, each equipped with a single-stage scroll compressor, enable efficient operation under partial load conditions.
- » Compressors are located outside the condenser section for easy access.
- » Crankcase heaters and internal/external compressor protections.

Supply Fan

Supply fans utilize 2 direct drive motors which eliminate the need for additional belts, sheaves, and maintenance associated with belt drives.

- » High-static drive options for applications with high airflow/static requirements.
- » Each fan assembly is dynamically trim balanced at the factory before shipment for quick start-up and efficient operation.
- » Motor with thermal overload is provided for long lasting operation.

Coils

The indoor coil section is installed in a draw through configuration to provide better dehumidification. These coils are constructed with seamless copper tubes, mechanically bonded into aluminum plate-type fins with full drawn collars to completely cover the tubes for high operating efficiencies.

- » Coils are factory pressure tested to ensure pressure and leak integrity.
- » Copper tube/aluminum fin coils in both indoor and outdoor sections provide efficient heat transfer for optimal heat pump performance. The refrigerant circuits are designed for proper refrigerant distribution and charge balance during heating and cooling operation. The circuits include TXVs, high and low pressure switches, high capacity filter-driers, and service ports for field access.



Controls and Wiring

Packaged rooftop units come equipped with a well-organized, large, easy to use, weatherproof internal control box with easy access, for a better user experience.

- » Units are factory-wired with color-coded wires and complete 24-volt Electromechanical controls package.
- » Units include single-point power entry as standard and also available with electric heat kits if selected.
- » Terminal strips are provided as standard for easy installation and field power wiring.

Filtration

Unit provides a draw-through filter section as standard for better air quality and long lasting component maintenance.

- » Filters installed on the units are standard off the shelf sizes for easy replacement.
- » 2" deep filters standard on all units with option for up to 4" on large chassis (15 tons and over).

Heating Selection

While the heat pump is capable of handling routine heating needs, a backup electric heat kit is recommended to provide supplemental heating during extreme cold weather, defrost cycles, and periods of high heating demand, to ensure occupant thermal comfort. A wide selection of optional ETL approved electric heat kits are available to handle specific heating requirements.

Electric Heat

ETL approved electric heat is factory assembled, installed and tested.


- » Heating control is fully integrated into the unit's control system for quick start-up and reliable control.

- » Multi-stage capability for application flexibility.
- » Fuses are provided in each branch circuit to a maximum of 48 Amps per NEC requirements.
- » Single-point power connection reduces installation cost.
- » Operational safeties for electric heat includes automatic reset, and high temperature limit protection to prevent electric heat operation in the event of no airflow.

Electrical

Units are completely wired and tested at the factory to provide faster commissioning and start-up.

- » Wiring complies with NEC requirements and all applicable UL standards.
- » Units are factory-wired with color-coded wires and complete 24-volt electromechanical controls package.
- » A 115 V GFI convenience outlet requiring independent power supply for the receptacle is optional.
- » An optional unit powered 20 amp 115 V convenience outlet, complete with factory mounted transformer, disconnect switch, and primary and secondary overload protection, eliminates the need to pull a separate 115 V power source.
- » Unit includes knockouts in the bottom of the main control panels for field wiring entrance.
- » A single-point power connection with power block is standard and a terminal strip is provided for connecting low voltage control wiring.
- » For better serviceability an optional non-fused disconnect switch is mounted inside the control panel and operated by an externally mounted handle to disconnect the electrical power at the unit.

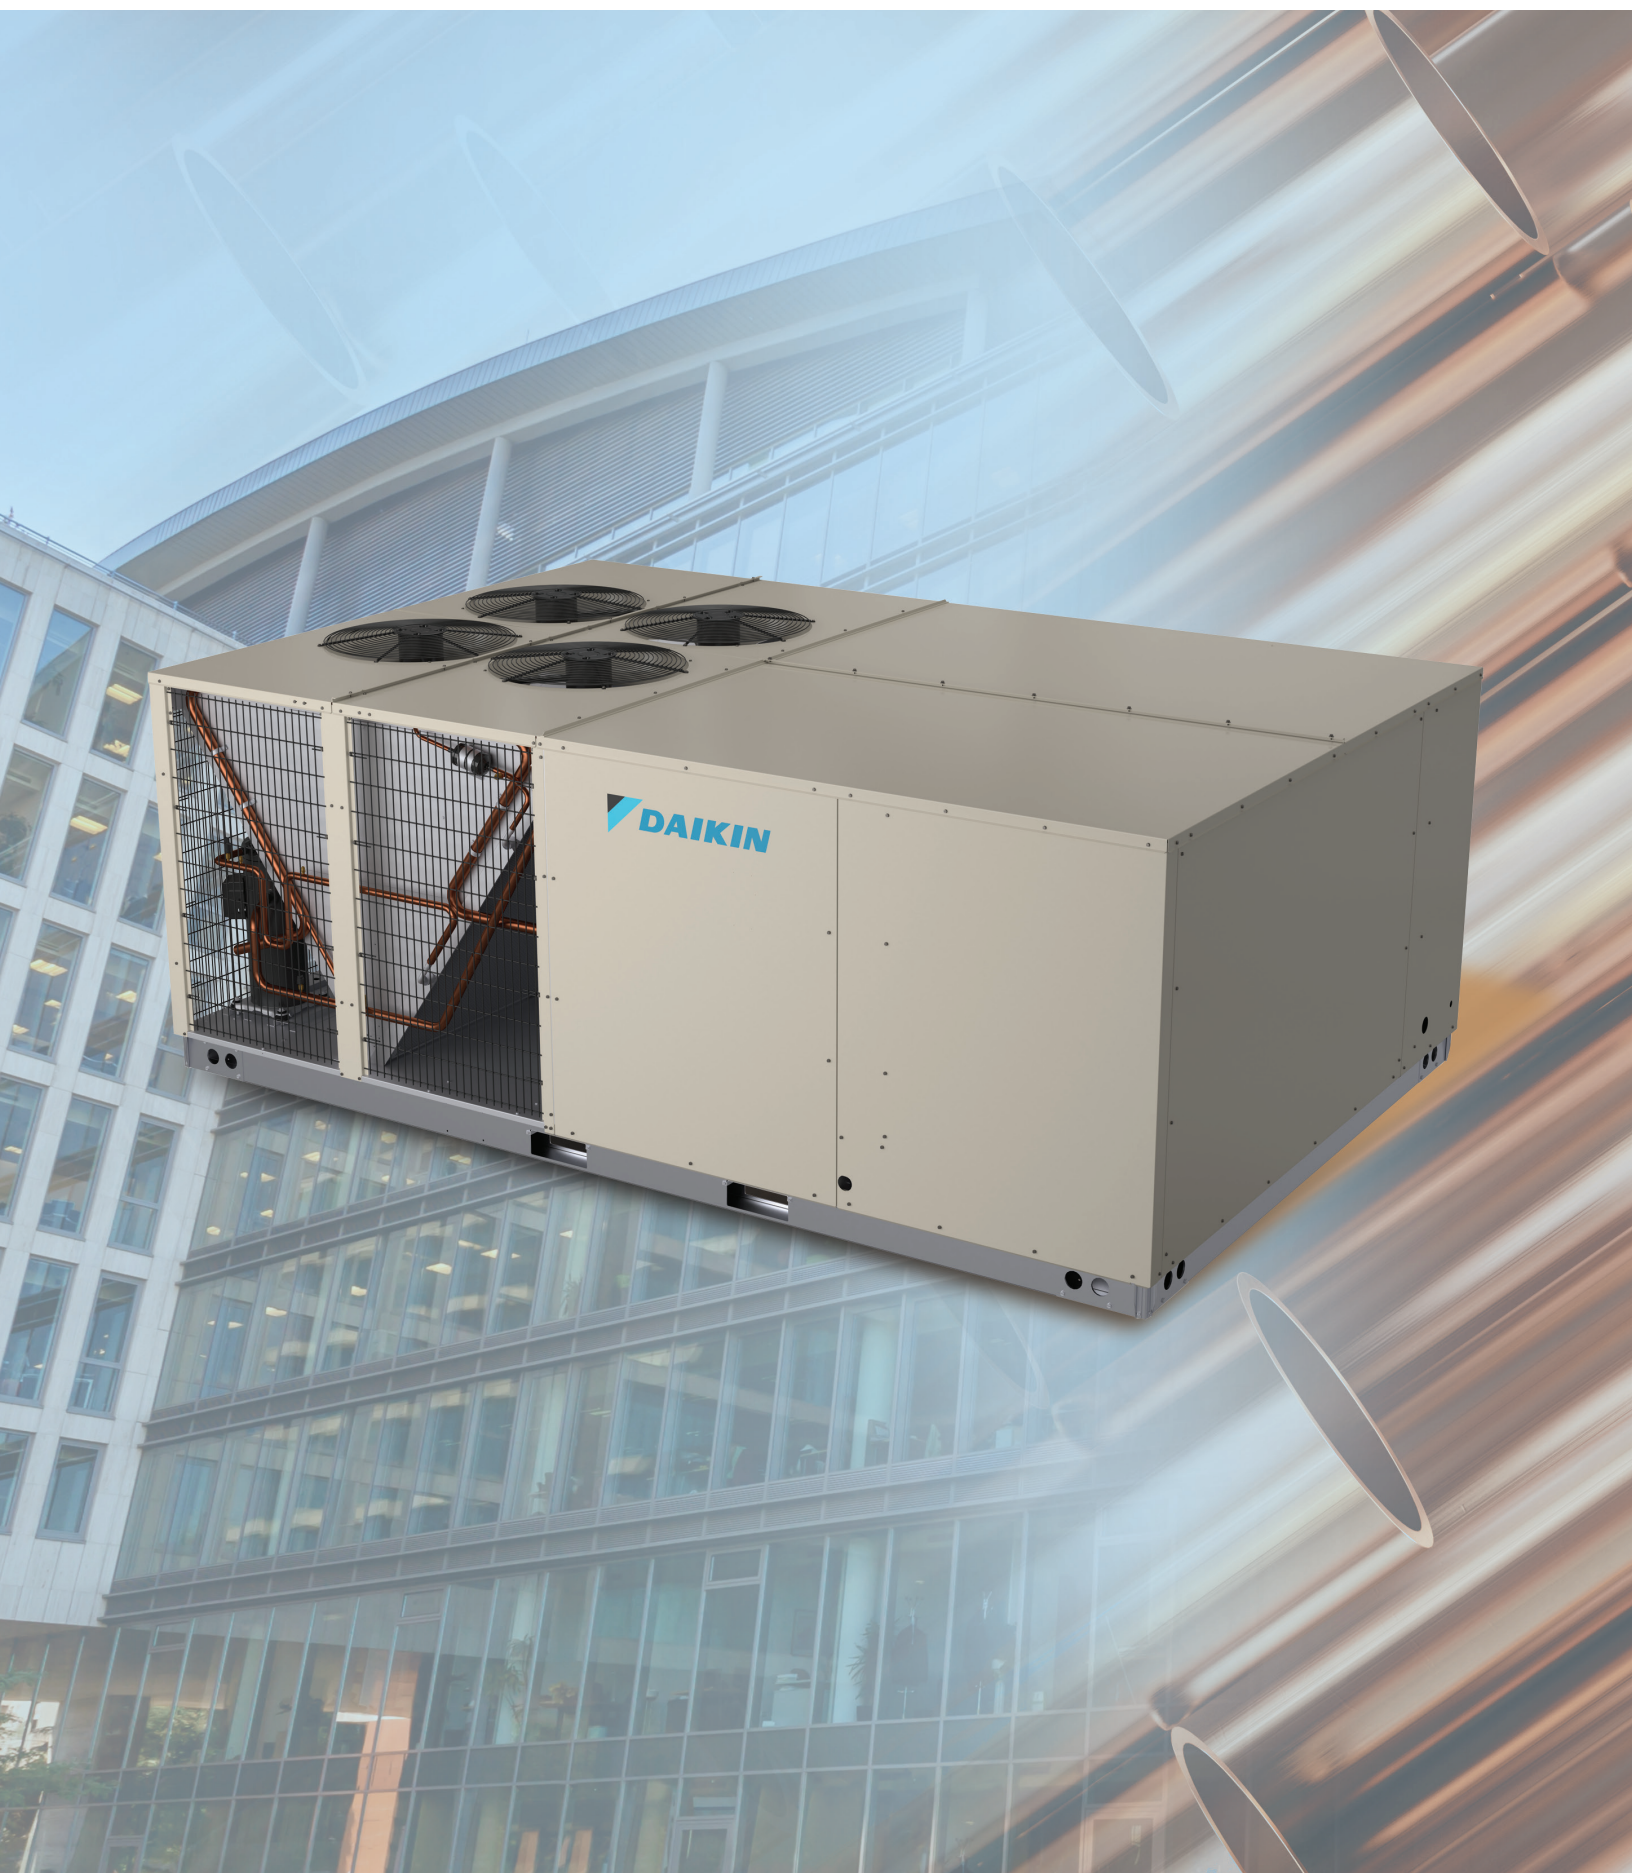

Applications

Daikin Rooftop units are intended for comfort cooling applications in normal heating, ventilating, and air conditioning. Consult your local Daikin sales representative for applications involving operations at high ambient temperatures, high altitudes, non-cataloged voltages, or for job-specific unit selections that fall outside of the range of the catalog tables.

For proper operation, units should be rigged in accordance with instructions stated on the installation manual. Fire dampers, if required, must be installed in the ductwork according to local and/or state codes. No space is allowed for these dampers in the unit.

Follow factory check, test and start procedures explicitly to achieve satisfactory start-up and operation.

Most rooftop applications take advantage of the significant energy savings provided with economizer operation. When an economizer system is used, mechanical refrigeration is typically not required below an ambient temperature of 50°F on most cases.

Serviceability

Daikin packaged rooftop units are built with serviceability in mind, designed to make future maintenance and service on the unit easy and accessible.

- » Compressors are located for ease of access and to minimize air-flow resistance to the outdoor coils.
- » Color coded wire to identify point-to-point component connections.
- » Panels allow easy access to the outdoor fans and facilitate cleaning the outdoor coils from inside-out.
- » Easy access to control panel.



PHYSICAL DATA COOLING			
Model	DSH1803D000001S	DSH1804D000001S	DSH1807D000001S
COOLING CAPACITY			
Total BTU/H	180,000	180,000	180,000
EER	10.6	10.6	10.6
IEER	14.50	14.50	14.50
AHRI Reference #			
EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15 x 15	15 x 15	15 x 15
Indoor Nominal CFM	7700	7700	7700
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5
Filter Size (in)	20 X 20 X 2 (8)	20 X 20 X 2 (8)	20 X 20 X 2 (8)
Drain Size (NPT)	1"	1"	1"
R-32 Refrigerant Charge (oz.) (1)	360	360	360
R-32 Refrigerant Charge (oz.) (2)	350	350	350
Evaporator Coil Face Area (ft ²)	21.69	21.69	21.69
Rows Deep/ Fins per Inch	4/18	4/18	4/18
CONDENSER FAN / RTPF (ROUND TUBE PLATE FIN)			
Quantity of Condenser Fan Motors	4	4	4
RPM (High/Low stage)	1060	1060	1060
Outdoor Horsepower	1/2	1/2	1/2
Fan Diameter / # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft ²) / Coil	21.68	21.68	21.68
Rows Deep / Fins per Inch	3/16	3/16	3/16
COMPRESSOR			
Quantity / Type / Stages per Compression	2 / Scroll / 1	2 / Scroll / 1	2 / Scroll / 1
Compressor RLA / LRA	25.0 / 179	10.9 / 103.0	8.4 / 78.0
ELECTRICAL DATA			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	10.9	7.2	5
Max External Static (In. W.C.)	1.2	1.2	1.2
Outdoor Fan FLA	2.7	1.4	1
Min. Circuit Ampacity ¹	88.9/88.9	44.5	33
Max. Overcurrent Protection (A) ²	110/110	50	40
Power Supply Conduit Hole Dia. (in)	2.5	2.5	2.5
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
	2273	2273	2273
SHIPPING WEIGHT (LBS.)			
	2388	2388	2388

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

PHYSICAL DATA COOLING			
Model	DSH2403D000001S	DSH2404D000001S	DSH2407D000001S
COOLING CAPACITY			
Total BTU/H	226,000	226,000	226,000
EER	10.6	10.6	10.6
IEER	14.35	14.35	14.35
AHRI Reference #			
EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15 x 15	15 x 15	15 x 15
Indoor Nominal CFM	7000	7000	7000
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5
Filter Size (in)	20 X 20 X 2 (8)	20 X 20 X 2 (8)	20 X 20 X 2 (8)
Drain Size (NPT)	1"	1"	1"
R-32 Refrigerant Charge (oz.) (1)	320	320	320
R-32 Refrigerant Charge (oz.) (2)	320	320	320
Evaporator Coil Face Area (ft²)	21.69	21.69	21.69
Rows Deep/ Fins per Inch	4/18	4/18	4/18
CONDENSER FAN / RTPF (ROUND TUBE PLATE FIN)			
Quantity of Condenser Fan Motors	4	4	4
RPM (High/Low stage)	1060	1060	1060
Outdoor Horsepower	1/2	1/2	1/2
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft²) / Coil	21.68	21.68	21.68
Rows Deep / Fins per Inch	3/16	3/16	3/16
COMPRESSOR			
Quantity / Type / Stages per Compression	2 / Scroll / 1	2 / Scroll / 1	2 / Scroll / 1
Compressor RLA / LRA	29.4 / 225	13.7 / 130.0	10.9 / 93.7
ELECTRICAL DATA			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	10.9	7.2	5
Max External Static (In. W.C.)	1.2	1.2	1.2
Outdoor Fan FLA	2.7	1.4	1
Min. Circuit Ampacity ¹	98.7/98.7	50.8	38.5
Max. Overcurrent Protection (A) ²	125/125	60	45
Power Supply Conduit Hole Dia. (in)	2.5	2.5	2.5
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
OPERATING WEIGHT (LBS.)			
	2354	2354	2354
SHIPPING WEIGHT (LBS.)			
	2469	2469	2469

¹ Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

² May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Product Specifications

Coil Dimensions

MODEL	TONS	FIN HEIGHT IN.	FIN LENGTH IN.	TYPE
DSH	15	40	78.092	Indoor
DSH	20	40	78.092	Indoor
DSH	15	41.58	75.090	Outdoor
DSH	20	41.58	75.090	Outdoor

AHRI Ratings

MODEL	CAPACITY 95F	EER	IEER	CAPACITY 47F	COP 47F	CAPACITY 17F	COP 17F
DSH1803D000001S	180,000	10.6	14.50	172,000	3.30	100,000	2.05
DSH1804D000001S	180,000	10.6	14.50	172,000	3.30	100,000	2.05
DSH1807D000001S	180,000	10.6	14.50	172,000	3.30	100,000	2.05
DSH2403D000001S	226,000	10.6	14.35	220,000	3.30	122,000	2.05
DSH2404D000001S	226,000	10.6	14.35	220,000	3.30	122,000	2.05
DSH2407D000001S	226,000	10.6	14.35	220,000	3.30	122,000	2.05

Sound Data

STATIC PRESSURE	15T SOUND (dB) AT 60 Hz									
	Component	A-Weighted	63	125	250	500	1000	2000	4000	8000
STD	Discharge	81.9	87.4	84.0	81.8	78.8	77.8	72.3	70.7	63.2
	Inlet	71.0	88.9	83.6	71.1	67.8	64.4	54.8	55.8	47.7
HIGH	Discharge	84.8	95.7	89.2	85.4	82.3	79.9	75.2	73.1	66.7
	Inlet	74.0	90.6	85.6	79.8	70.1	64.9	56.8	57.8	51.9
	Outdoor	90.6	91.0	89.7	89.4	91.8	82.7	77.8	72.5	67.0


STATIC PRESSURE	20T SOUND (dB) AT 60 Hz									
	Component	A-Weighted	63	125	250	500	1000	2000	4000	8000
STD	Discharge	85.6	89.9	86.4	85.2	82.4	81.6	76.0	75.0	68.5
	Inlet	71.3	84.6	81.4	72.0	69.0	65.8	57.6	59.3	52.2
HIGH	Discharge	86.6	94.9	90.8	87.7	83.8	81.8	76.6	74.9	69.0
	Inlet	75.0	90.5	86.6	80.7	70.9	65.7	58.2	59.1	52.9
	Outdoor	89.8	92.5	91.0	89.1	90.7	82.1	77.6	72.6	67.8

dB - decibel

¹ Indoor sound data is measured in accordance with AHRI 260. Outdoor sound is measured in accordance with AHRI 370


² Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environment factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.

³ A-weighted sound ratings filter out high and very low frequencies, to better approximate the response of "average" human ear. A-weighted measurements for Daikin units are taken in accordance with AHRI standard 260 for the indoor sound and AHRI 370 for the outdoor sound.

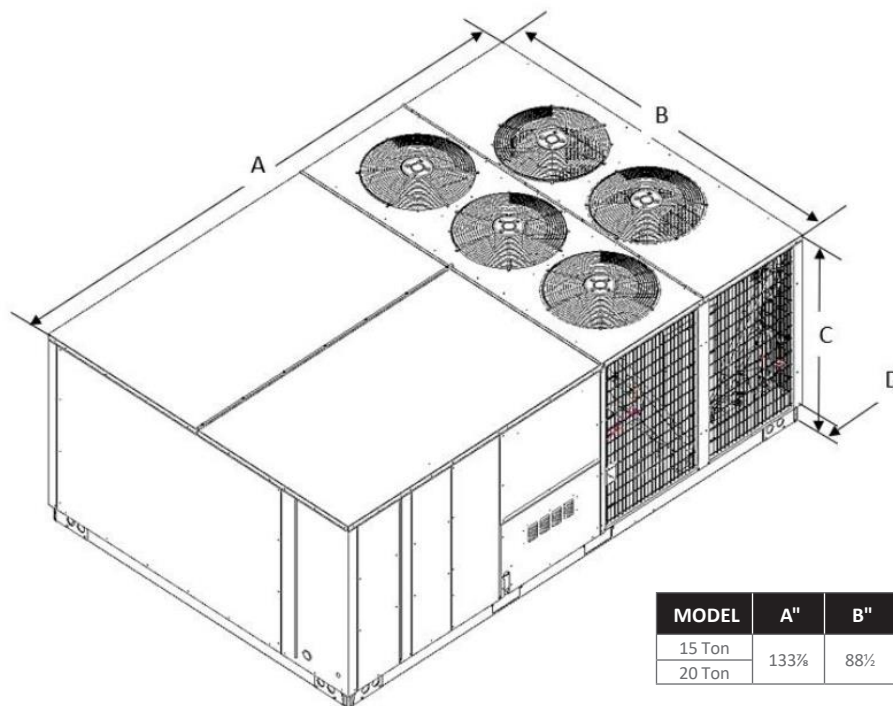


MODEL	A"	B"	C"	D"
15 Ton	133 1/2"	88 1/2"	51"	5 11/32"
20 Ton				


25 Ton AC shown in picture
 20 Ton AC/HP and 15 Ton HP models have 4 fans
 15 Ton AC model has 3 fans

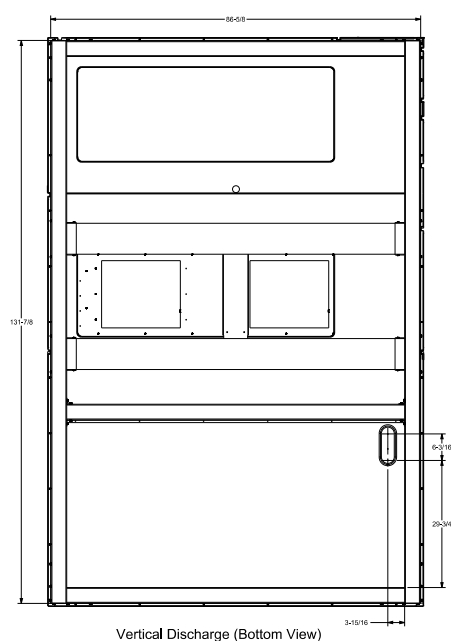

Vertical Discharge (Bottom View)



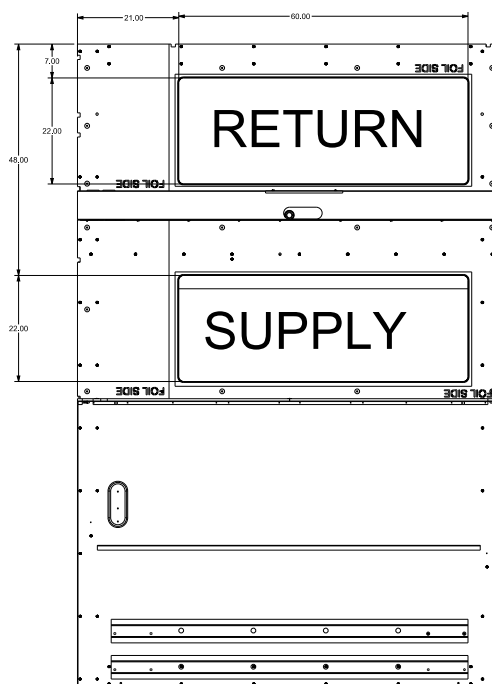


Vertical Discharge (Top View)

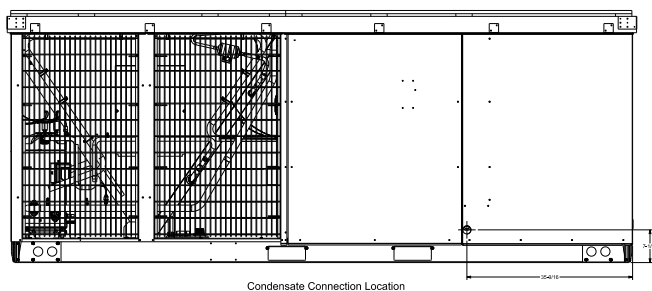


Condensate Connection Location

Light Commercial Base Rails

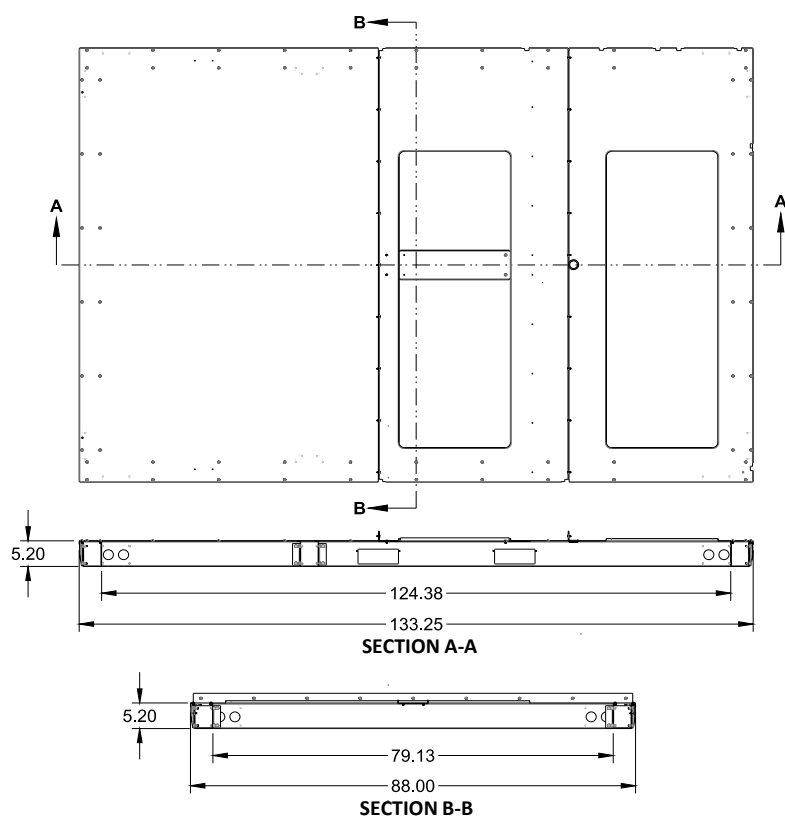

SECTION A-A
RAIL DETAIL



SECTION B-B
RAIL DETAIL

		Outdoor Ambient Temperature																																									
		65						75						85						95						105						115						125					
IDB	Airflow	Entering Indoor Wet Bulb Temperature																																									
6000	MBh	181.5	184.1	189.6	-	179.9	182.5	188.0	-	175.1	177.7	183.2	-	166.9	169.5	175.0	-	156.8	159.4	164.9	-	147.7	150.2	155.7	-	142.7	145.3	150.8	-														
	S/T	0.59	0.51	0.36	-	0.60	0.51	0.36	-	0.62	0.54	0.39	-	1.00	0.56	0.41	-	1.00	0.58	0.44	-	1.00	0.64	0.49	-	1.00	1.00	0.62	-														
	ΔT	16.19	14.10	10.26	-	16.23	14.16	10.36	-	16.52	14.53	10.86	-	25.29	14.40	10.94	-	23.76	14.13	10.91	-	22.37	14.60	11.63	-	21.6	22.0	14.2	-														
6600	MBh	182.8	185.4	190.9	-	181.2	183.8	189.2	-	176.4	179.0	184.5	-	168.2	170.8	176.2	-	158.1	160.7	166.2	-	148.9	151.5	157.0	-	144.0	146.6	152.0	-														
	S/T	0.65	0.57	0.42	-	0.66	0.57	0.43	-	0.68	0.60	0.45	-	1.00	0.62	0.47	-	1.00	0.65	0.50	-	1.00	0.70	0.55	-	1.00	1.00	0.68	-														
	ΔT	16.38	14.48	11.01	-	16.40	14.53	11.10	-	16.63	14.83	11.51	-	23.16	14.64	11.52	-	21.78	14.32	11.41	-	20.51	14.67	12.00	-	19.8	20.2	14.3	-														
70	7200	184.2	186.8	192.3	-	182.6	185.2	190.6	-	177.8	180.4	185.9	-	169.6	172.2	177.6	-	159.5	162.1	167.6	-	150.3	152.9	158.4	-	145.4	148.0	153.5	-														
	S/T	0.70	0.61	0.47	-	0.70	0.62	0.47	-	0.73	0.65	0.50	-	1.00	0.67	0.52	-	1.00	0.69	0.55	-	1.00	0.75	0.60	-	1.00	1.00	0.73	-														
	ΔT	16.23	14.50	11.32	-	16.25	14.53	11.39	-	16.44	14.78	11.75	-	21.41	14.57	11.71	-	20.14	14.21	11.55	-	18.98	14.49	12.05	-	18.4	18.7	14.2	-														
7400	7400	184.7	187.3	192.8	-	183.1	185.7	191.2	-	178.3	180.9	186.4	-	170.1	172.7	178.1	-	160.0	162.6	168.1	-	150.9	153.4	158.9	-	145.9	148.5	154.0	-														
	S/T	0.71	0.63	0.48	-	0.72	0.63	0.49	-	0.75	0.66	0.51	-	1.00	0.68	0.53	-	1.00	0.71	0.56	-	1.00	0.76	0.62	-	1.00	1.00	0.74	-														
	ΔT	16.13	14.44	11.36	-	16.14	14.47	11.42	-	16.32	14.71	11.76	-	20.90	14.49	11.71	-	19.66	14.13	11.55	-	18.53	14.39	12.01	-	17.9	18.2	14.1	-														
7700	7700	185.5	188.1	193.6	-	183.9	186.5	192.0	-	179.1	181.7	187.2	-	170.9	173.5	178.9	-	160.8	163.4	168.9	-	151.7	154.2	159.7	-	146.7	149.3	154.8	-														
	S/T	0.73	0.64	0.50	-	0.73	0.65	0.50	-	1.00	0.68	0.53	-	1.00	0.70	0.55	-	1.00	0.72	0.58	-	1.00	0.78	0.63	-	1.00	1.00	0.76	-														
	ΔT	15.95	14.32	11.35	-	15.95	14.35	11.41	-	21.15	14.57	11.73	-	20.18	14.34	11.66	-	18.99	13.98	11.49	-	17.90	14.22	11.93	-	17.3	17.6	13.9	-														
75	6000	181.6	184.2	189.7	195.1	180.0	182.6	188.1	196.4	175.2	177.8	183.3	191.6	167.0	169.6	175.1	183.4	156.9	159.5	165.0	173.4	147.8	150.4	155.8	164.2	142.8	145.4	150.9	159.2														
	S/T	0.73	0.65	0.50	0.34	1.00	0.65	0.50	0.35	1.00	0.68	0.53	0.38	1.00	0.70	0.55	0.40	1.00	0.73	0.58	0.42	1.00	1.00	0.63	0.48	1.00	1.00	0.76	0.61														
	ΔT	20.08	18.04	14.32	10.3	27.27	18.07	14.39	10.4	26.55	18.34	14.78	10.9	25.30	18.03	14.69	11.0	23.78	17.55	14.45	11.1	22.39	22.78	14.97	11.9	21.6	22.0	17.5	14.7														
6600	6600	182.9	185.5	191.0	199.3	181.3	183.9	189.3	197.7	176.5	179.1	184.6	192.9	168.3	170.9	176.3	184.7	158.2	160.8	166.3	174.6	149.0	151.6	157.1	165.5	144.1	146.7	152.2	160.5														
	S/T	0.79	0.71	0.56	0.40	1.00	0.72	0.57	0.41	1.00	0.74	0.59	0.44	1.00	0.76	0.62	0.46	1.00	0.79	0.64	0.48	1.00	1.00	0.70	0.54	1.00	1.00	0.83	0.67														
	ΔT	19.94	18.10	14.73	11.1	24.97	18.11	14.78	11.2	24.31	18.32	15.11	11.6	23.18	17.97	14.95	11.7	21.79	17.45	14.65	11.6	20.53	20.89	15.06	12.3	19.8	20.2	17.3	14.8														
7200	7200	184.3	186.9	192.4	200.8	182.7	185.3	190.8	199.1	177.9	180.5	186.0	194.3	169.7	172.3	177.7	186.1	159.6	162.2	167.7	176.0	150.5	153.0	158.5	166.9	145.5	148.1	153.6	161.9														
	S/T	0.84	0.76	0.61	0.45	1.00	0.76	0.61	0.46	1.00	0.79	0.64	0.49	1.00	0.81	0.66	0.51	1.00	1.00	0.69	0.53	1.00	1.00	0.74	0.59	1.00	1.00	1.00	0.72														
	ΔT	19.53	17.84	14.76	11.4	23.07	17.84	14.80	11.5	22.46	18.00	15.07	11.9	21.43	17.65	14.88	11.9	20.16	20.48	14.55	11.8	19.00	19.32	14.88	12.4	18.4	18.7	19.4	14.7														
7400	7400	184.8	187.4	192.9	201.3	183.2	185.8	191.3	199.6	178.4	181.0	186.5	194.8	170.2	172.8	178.3	186.6	160.1	162.7	168.2	176.6	151.0	153.5	159.0	167.4	146.0	148.6	154.1	162.4														
	S/T	0.85	0.77	0.62	0.46	1.00	0.78	0.63	0.47	1.00	0.80	0.65	0.50	1.00	0.82	0.68	0.52	1.00	1.00	0.70	0.54	1.00	1.00	0.76	0.60	1.00	1.00	1.00	0.73														
	ΔT	19.35	17.70	14.71	11.5	22.51	17.70	14.74	11.6	21.92	17.86	15.00	11.9	20.91	17.50	14.80	11.9	19.67	19.99	14.47	11.8	18.55	18.86	14.78	12.3	17.9	18.3	18.9	14.6														
7700	7700	185.6	188.2	193.7	202.1	184.0	186.6	192.1	200.4	179.2	181.8	187.3	195.6	171.0	173.6	179.1	187.4	160.9	163.5	169.0	177.4	151.8	154.3	159.8	168.2	146.8	149.4	154.9	163.2														
	S/T	0.87	0.79	0.64	0.48	1.00	0.79	0.64	0.49	1.00	0.82	0.67	0.52	1.00	0.84	0.69	0.54	1.00	1.00	0.72	0.56	1.00	1.00	0.77	0.62	1.00	1.00	1.00	0.75														
	ΔT	19.05	17.47	14.58	11.5	21.72	17.46	14.61	11.6	21.16	17.60	14.86	11.9	20.19	17.24	14.65	11.9	19.00	19.31	14.31	11.7	17.92	18.22	14.60	12.3	17.3	17.6	18.3	14.4														

		Outdoor Ambient Temperature																											
		65				75				85				95				105				115				125			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
6000	MBh	182.6	185.2	190.7	199.0	181.0	183.5	189.0	197.4	176.2	178.8	184.2	192.6	167.9	170.5	176.0	184.4	157.9	160.5	166.0	174.3	148.7	151.3	156.8	165.1	143.8	146.4	151.8	160.2
	S/T	1.00	0.78	0.64	0.48	1.00	0.79	0.64	0.49	1.00	0.82	0.67	0.51	1.00	1.00	0.69	0.53	1.00	1.00	0.71	0.56	1.00	1.00	0.77	0.61	1.00	1.00	0.74	
	ΔT	27.67	21.98	18.35	14.4	27.42	21.98	18.39	14.5	26.69	22.15	18.69	15.0	25.45	25.84	18.42	14.9	23.92	24.32	17.98	14.8	22.53	22.92	18.32	15.4	21.8	22.2	23.0	18.1
6600	MBh	183.9	186.5	191.9	200.3	182.2	184.8	190.3	198.6	177.5	180.0	185.5	193.9	169.2	171.8	177.3	185.6	159.2	161.8	167.2	175.6	150.0	152.6	158.0	166.4	145.0	147.6	153.1	161.5
	S/T	1.00	0.85	0.70	0.54	1.00	0.85	0.70	0.55	1.00	0.88	0.73	0.58	1.00	1.00	0.75	0.60	1.00	1.00	0.78	0.62	1.00	1.00	0.83	0.68	1.00	1.00	0.81	
	ΔT	25.33	21.71	18.43	14.9	25.10	21.69	18.45	15.0	24.44	21.81	18.69	15.4	23.31	23.67	18.38	15.2	21.92	22.28	17.89	15.0	20.66	21.02	18.14	15.5	20.0	20.3	21.1	17.9
80	MBh	185.3	187.9	193.3	201.7	183.6	186.2	191.7	200.1	178.9	181.5	186.9	195.3	170.6	173.2	178.7	187.1	160.6	163.2	168.6	177.0	151.4	154.0	159.5	167.8	146.5	149.0	154.5	162.9
	S/T	1.00	0.89	0.74	0.59	1.00	0.90	0.75	0.60	1.00	0.93	0.78	0.62	1.00	1.00	0.80	0.64	1.00	1.00	0.82	0.67	1.00	1.00	0.88	0.72	1.00	1.00	0.85	
	ΔT	23.39	21.18	18.18	15.0	23.19	21.16	18.19	15.0	22.58	21.24	18.38	15.4	21.55	21.87	18.05	15.2	20.28	20.60	17.55	14.9	19.12	19.44	17.73	15.3	18.5	18.8	19.5	17.6
7400	MBh	185.8	188.4	193.9	202.2	184.2	186.7	192.2	200.6	179.4	182.0	187.4	195.8	171.1	173.7	179.2	187.6	161.1	163.7	169.1	177.5	151.9	154.5	160.0	168.3	147.0	149.5	155.0	163.4
	S/T	1.00	0.91	0.76	0.60	1.00	0.91	0.76	0.61	1.00	0.94	0.79	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.84	0.68	1.00	1.00	0.89	0.74	1.00	1.00	0.87	
	ΔT	22.82	20.96	18.04	14.9	22.62	20.94	18.05	15.0	22.04	21.01	18.23	15.3	21.03	21.34	17.90	15.1	19.79	20.11	17.40	14.9	18.66	18.98	17.56	15.2	18.1	18.4	19.0	17.4
7700	MBh	186.6	189.2	194.6	203.0	185.0	187.5	193.0	201.4	180.2	182.8	188.2	196.6	171.9	174.5	180.0	188.4	161.9	164.5	169.9	178.3	152.7	155.3	160.8	169.1	147.8	150.3	155.8	164.2
	S/T	1.00	0.92	0.77	0.62	1.00	0.93	0.78	0.63	1.00	1.00	0.81	0.65	1.00	1.00	0.83	0.67	1.00	1.00	0.85	0.70	1.00	1.00	1.00	0.75	1.00	1.00	0.88	
	ΔT	22.03	20.62	17.81	14.8	21.84	20.59	17.81	14.9	21.27	21.58	17.98	15.1	20.30	20.61	17.64	15.0	19.11	19.42	17.14	14.7	18.03	18.33	18.98	15.1	17.4	17.8	18.4	17.1
6000	MBh	185.7	188.3	193.7	202.1	184.0	186.6	192.1	200.5	179.3	181.8	187.3	195.7	171.0	173.6	179.1	187.4	161.0	163.6	169.0	177.4	151.8	154.4	159.9	168.2	146.9	149.4	154.9	163.3
	S/T	1.00	0.89	0.75	0.59	1.00	1.00	0.75	0.60	1.00	1.00	0.78	0.62	1.00	1.00	0.80	0.65	1.00	1.00	1.00	0.67	1.00	1.00	1.00	0.73	1.00	1.00	1.00	
	ΔT	28.13	25.51	21.90	18.1	27.89	28.28	21.91	18.1	27.16	27.55	22.14	18.5	25.91	26.31	21.75	18.3	24.39	24.78	25.61	18.0	23.00	23.39	24.22	18.5	22.3	22.6	23.5	24.7
6600	MBh	187.0	189.5	195.0	203.4	185.3	187.9	193.4	201.7	180.5	183.1	188.6	197.0	172.3	174.9	180.4	188.7	162.3	164.8	170.3	178.7	153.1	155.7	161.1	169.5	148.1	150.7	156.2	164.5
	S/T	1.00	0.96	0.81	0.65	1.00	1.00	0.81	0.66	1.00	1.00	0.84	0.69	1.00	1.00	0.86	0.71	1.00	1.00	1.00	0.73	1.00	1.00	1.00	0.79	1.00	1.00	1.00	
	ΔT	25.75	24.96	21.70	18.3	25.53	25.88	21.70	18.3	24.87	25.22	21.87	18.6	23.73	24.09	21.45	18.4	22.35	22.71	23.46	18.0	21.09	21.44	22.19	18.4	20.4	20.8	21.5	22.7
7200	MBh	188.4	191.0	196.4	204.8	186.7	189.3	194.8	203.1	182.0	184.5	190.0	198.4	173.7	176.3	181.8	190.1	163.7	166.3	171.7	180.1	154.5	157.1	162.5	170.9	149.5	152.1	157.6	166.0
	S/T	1.00	1.00	0.86	0.70	1.00	1.00	0.86	0.71	1.00	1.00	0.89	0.73	1.00	1.00	0.91	0.75	1.00	1.00	1.00	0.78	1.00	1.00	1.00	0.83	1.00	1.00	1.00	
	ΔT	23.78	24.11	21.21	18.1	23.58	23.90	21.21	18.1	22.97	23.30	21.34	18.4	21.93	22.26	20.91	18.1	20.67	20.99	21.68	17.7	19.51	19.83	20.52	18.0	18.9	19.2	19.9	21.0
7400	MBh	188.9	191.5	196.9	205.3	187.2	189.8	195.3	203.7	182.5	185.0	190.5	198.9	174.2	176.8	182.3	190.6	164.2	166.8	172.2	180.6	155.0	157.6	163.1	171.4	150.0	152.6	158.1	166.5
	S/T	1.00	1.00	0.87	0.71	1.00	1.00	0.88	0.72	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.79	1.00	1.00	1.00	0.85	1.00	1.00	1.00	
	ΔT	23.20	23.52	21.01	18.0	23.00	23.32	21.00	18.0	22.42	22.73	21.13	18.2	21.40	21.72	20.69	18.0	20.17	20.49	21.16	17.6	19.04	19.36	20.03	17.9	18.4	18.8	19.4	20.4
7700	MBh	189.7	192.3	197.7	206.1	188.0	190.6	196.1	204.5	183.3	185.8	191.3	199.7	175.0	177.6	183.1	191.4	165.0	167.6	173.0	181.4	155.8	158.4	163.9	172.2	150.8	153.4	158.9	167.3
	S/T	1.00	1.00	0.89	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.76	1.00	1.00	0.94	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.87	1.00	1.00	1.00	
	ΔT	22.39	22.70	20.67	17.7	22.20	22.51	20.66	17.8	21.64	21.94	20.77	18.0	20.66	20.97	20.34	17.7	19.48	19.78	20.43	17.3	18.39	18.70	19.34	17.6	17.8	18.1	18.8	19.7

IDB: Entering Indoor Dry Bulb Temperature Shaded area reflects ACCA (TVA) conditions

		Outdoor Ambient Temperature																											
		65				75				85				95				105				115				125			
IDB	Airflow	Entering Indoor Wet Bulb Temperature																											
6000	MBh	189.4	192.0	197.5	205.8	187.8	190.4	195.8	204.2	183.0	185.6	191.1	199.4	174.8	177.4	182.8	191.2	164.7	167.3	172.8	181.1	155.5	158.1	163.6	172.0	150.6	153.2	158.6	167.0
	S/T	1.00	1.00	0.83	0.67	1.00	1.00	0.84	0.68	1.00	1.00	1.00	0.71	1.00	1.00	1.00	0.73	1.00	1.00	1.00	0.75	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
	ΔT	28.7	29.1	24.8	21.0	28.5	28.8	24.8	21.0	27.7	28.1	28.9	21.4	26.5	26.9	27.7	21.1	25.0	25.3	26.2	20.7	23.6	24.0	24.8	26.1	22.8	23.2	24.0	25.3
6600	MBh	190.7	193.3	198.8	207.1	189.1	191.6	197.1	205.5	184.3	186.9	192.3	200.7	176.0	178.6	184.1	192.5	166.0	168.6	174.0	182.4	156.8	159.4	164.9	173.2	151.9	154.5	159.9	168.3
	S/T	1.00	1.00	0.89	0.74	1.00	1.00	0.90	0.74	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
	ΔT	26.3	26.6	24.4	21.0	26.0	26.4	24.4	21.0	25.4	25.7	26.5	21.3	24.2	24.6	25.4	21.0	22.9	23.2	24.0	20.5	21.6	22.0	22.7	23.9	20.9	21.3	22.0	23.2
7200	MBh	192.1	194.7	200.2	208.5	190.5	193.1	198.5	206.9	185.7	188.3	193.7	202.1	177.5	180.0	185.5	193.9	167.4	170.0	175.5	183.8	158.2	160.8	166.3	174.6	153.3	155.9	161.3	169.7
	S/T	1.00	1.00	0.94	0.78	1.00	1.00	0.95	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.84	1.00	1.00	1.00	0.86	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
	ΔT	24.3	24.6	23.7	20.6	24.0	24.4	23.7	20.6	23.4	23.8	24.5	20.9	22.4	22.7	23.4	20.5	21.1	21.5	22.2	20.0	20.0	20.3	21.0	22.1	19.4	19.7	20.4	21.4
7400	MBh	192.6	195.2	200.7	209.0	191.0	193.6	199.0	207.4	186.2	188.8	194.3	202.6	178.0	180.6	186.0	194.4	167.9	170.5	176.0	184.3	158.7	161.3	166.8	175.1	153.8	156.4	161.8	170.2
	S/T	1.00	1.00	0.95	0.80	1.00	1.00	0.96	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.85	1.00	1.00	1.00	0.88	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
	ΔT	23.7	24.0	23.5	20.4	23.5	23.8	23.4	20.5	22.9	23.2	23.9	20.7	21.9	22.2	22.9	20.3	20.6	20.9	21.6	19.8	19.5	19.8	20.5	21.5	18.9	19.2	19.9	20.9
7700	MBh	193.4	196.0	201.5	209.8	191.8	194.4	199.8	208.2	187.0	189.6	195.0	203.4	178.8	181.4	186.8	195.2	168.7	171.3	176.8	185.1	159.5	162.1	167.6	175.9	154.6	157.2	162.6	171.0
	S/T	1.00	1.00	0.97	0.81	1.00	1.00	0.98	0.82	1.00	1.00	1.00	0.85	1.00	1.00	1.00	0.87	1.00	1.00	1.00	0.89	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
	ΔT	22.8	23.1	23.1	20.1	22.6	22.9	23.0	20.2	22.1	22.4	23.0	20.3	21.1	21.4	22.1	20.0	19.9	20.2	20.9	19.5	18.8	19.1	19.8	20.8	18.3	18.6	19.2	20.2

IDB: Entering Indoor Dry Bulb Temperature

Shaded area reflects ACCA (TVA) conditions

IDB		Outdoor Ambient Temperature																															
		65				75				85				95				105				115				125							
		Airflow		59		63		67		71		59		63		67		71		59		63		67		71		59		63		67	
70	6000	MBh	229.5	232.8	239.7	-	227.5	230.7	237.6	-	221.5	224.7	231.6	-	211.1	214.4	221.3	-	198.5	201.8	208.6	-	187.0	190.2	197.1	-	180.8	184.0	190.9	-			
		S/T	0.58	0.50	0.37	-	0.58	0.51	0.38	-	0.61	0.53	0.40	-	0.63	0.55	0.42	-	1.00	0.57	0.44	-	1.00	0.62	0.49	-	1.00	0.74	0.61	-			
		ΔT	20.08	17.76	13.50	-	20.11	17.81	13.60	-	20.39	18.18	14.11	-	20.04	17.95	14.12	-	30.08	17.55	13.99	-	28.33	17.99	14.71	-	27.4	20.6	17.6	-			
	6500	MBh	231.2	234.4	241.3	-	229.1	232.3	239.2	-	223.1	226.3	233.2	-	212.8	216.0	222.9	-	200.1	203.4	210.3	-	188.6	191.9	198.7	-	182.4	185.6	192.5	-			
		S/T	0.62	0.54	0.41	-	0.62	0.55	0.42	-	0.65	0.57	0.44	-	0.67	0.59	0.46	-	1.00	0.61	0.48	-	1.00	0.66	0.53	-	1.00	0.78	0.65	-			
75	7000	ΔT	19.93	17.79	13.87	-	19.94	17.83	13.95	-	20.18	18.14	14.39	-	19.81	17.88	14.35	-	27.99	17.44	14.16	-	26.38	17.79	14.78	-	25.5	20.2	17.4	-			
		MBh	232.9	236.2	243.1	-	230.9	234.1	241.0	-	224.9	228.1	235.0	-	214.6	217.8	224.7	-	201.9	205.2	212.0	-	190.4	193.7	200.5	-	184.2	187.4	194.3	-			
		S/T	0.65	0.57	0.44	-	0.65	0.58	0.45	-	0.68	0.60	0.47	-	0.70	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-	1.00	1.00	0.68	-			
	7500	ΔT	19.55	17.56	13.91	-	19.56	17.59	13.99	-	19.76	17.86	14.38	-	19.38	17.58	14.30	-	26.23	17.14	14.09	-	24.73	17.43	14.62	-	23.9	24.3	17.1	-			
		MBh	234.9	238.2	245.1	-	232.9	236.1	243.0	-	226.9	230.1	237.0	-	216.5	219.8	226.7	-	203.9	207.2	214.0	-	192.4	195.6	202.5	-	186.2	189.4	196.3	-			
8000	8000	S/T	0.67	0.59	0.46	-	0.67	0.60	0.47	-	0.70	0.62	0.49	-	0.72	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	1.00	0.70	-			
		ΔT	19.02	17.15	13.74	-	19.02	17.17	13.80	-	19.20	17.42	14.16	-	18.82	17.14	14.06	-	24.72	16.69	13.83	-	23.32	16.95	14.31	-	22.6	23.0	16.6	-			
		MBh	237.2	240.4	247.3	-	235.1	238.3	245.2	-	229.1	232.3	239.2	-	218.8	222.0	228.9	-	206.1	209.4	216.3	-	194.6	197.9	204.7	-	188.4	191.6	198.5	-			
		S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	1.00	0.71	-			
		ΔT	18.38	16.61	13.39	-	18.38	16.63	13.45	-	18.54	16.86	13.78	-	24.86	16.58	13.68	-	23.42	16.15	13.45	-	22.11	16.38	13.89	-	21.4	21.8	16.1	-			
75	6000	MBh	229.7	232.9	239.8	250.3					221.6	224.9	231.7	242.2					198.7	201.9	208.8	219.3					187.1	190.4	197.2	207.7			
		S/T	0.70	0.63	0.50	0.36					1.00	0.66	0.53	0.39					1.00	0.70	0.57	0.43					1.00	0.75	0.62	0.48			
		ΔT	24.45	22.19	18.06	13.6					33.58	22.45	18.52	14.3					30.10	21.40	17.96	14.3					28.35	21.61	18.46	15.1			
	6500	MBh	231.3	234.5	241.4	251.9					223.2	226.5	233.3	243.8					200.3	203.5	210.4	220.9					188.8	192.0	198.9	209.4			
		S/T	0.74	0.67	0.54	0.40					1.00	0.70	0.57	0.43					1.00	0.74	0.61	0.47					1.00	0.79	0.66	0.52			
75	7000	ΔT	23.99	21.91	18.10	14.0					31.22	22.11	18.49	14.6					28.01	21.02	17.86	14.5					26.40	21.17	18.27	15.2			
		MBh	233.1	236.3	243.2	253.7					225.0	228.3	235.1	245.6					202.1	205.3	212.2	222.7					190.5	193.8	200.7	211.1			
		S/T	0.77	0.70	0.57	0.43					1.00	0.73	0.60	0.46					1.00	0.77	0.64	0.50					1.00	0.82	0.69	0.55			
	7500	ΔT	23.35	21.41	17.88	14.1					29.22	21.58	18.21	14.6					26.24	20.49	17.55	14.4					24.75	20.59	17.89	15.0			
		MBh	235.1	238.3	245.2	255.7					227.0	230.3	237.1	247.6					204.1	207.3	214.2	224.7					192.5	195.8	202.6	213.1			
8000	8000	S/T	0.79	0.72	0.59	0.45					1.00	0.75	0.62	0.48					1.00	0.79	0.66	0.52					1.00	1.00	0.71	0.57			
		ΔT	22.60	20.78	17.47	13.9					27.52	20.92	17.76	14.4					24.73	19.85	17.09	14.2					23.34	23.73	17.40	14.7			
		MBh	237.3	240.5	247.4	257.9					229.2	232.5	239.3	249.8					206.3	209.5	216.4	226.9					194.7	198.0	204.9	215.4			
		S/T	0.81	0.73	0.60	0.46					1.00	0.76	0.63	0.49					1.00	0.80	0.67	0.53					1.00	1.00	0.72	0.58			
		ΔT	21.77	20.05	16.92	13.6					26.05	20.18	17.19	14.0					23.44	19.14	16.54	13.8					22.13	22.50	16.82	14.3			

		Outdoor Ambient Temperature																																									
		65						75						85						95						105						115						125					
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71						
6000	MBh	230.9	234.1	241.0	251.5	228.8	232.1	238.9	249.4	222.8	226.0	232.9	243.4	212.5	215.7	222.6	233.1	199.8	203.1	210.0	220.5	188.3	191.6	198.4	208.9	182.1	185.4	192.2	202.7	182.1	185.4	192.2	202.7	182.1	185.4	192.2	202.7						
	S/T	0.82	0.75	0.62	0.48	1.00	0.76	0.62	0.49	1.00	0.78	0.65	0.51	1.00	0.80	0.67	0.53	1.00	1.00	0.69	0.55	1.00	1.00	0.74	0.60	1.00	1.00	0.85	0.72	1.00	1.00	0.85	0.72	1.00	1.00	0.85	0.72						
	ΔT	28.83	26.62	22.59	18.3	34.67	26.60	22.62	18.4	33.76	26.74	22.91	18.8	32.19	26.14	22.53	18.7	30.28	30.77	21.94	18.4	28.53	29.03	22.23	19.0	27.6	28.1	24.9	22.0	27.6	28.1	24.9	22.0	27.6	28.1	24.9	22.0						
6500	MBh	232.5	235.7	242.6	253.1	230.4	233.7	240.5	251.0	224.4	227.7	234.5	245.0	214.1	217.3	224.2	234.7	201.5	204.7	211.6	222.1	189.9	193.2	200.1	210.5	183.7	187.0	193.8	204.3	183.7	187.0	193.8	204.3	183.7	187.0	193.8	204.3						
	S/T	0.86	0.79	0.66	0.52	1.00	0.80	0.66	0.53	1.00	0.82	0.69	0.55	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.59	1.00	1.00	0.78	0.64	1.00	1.00	0.89	0.75	1.00	1.00	0.89	0.75	1.00	1.00	0.89	0.75						
	ΔT	28.07	26.03	22.32	18.4	32.23	26.00	22.34	18.4	31.39	26.10	22.58	18.8	29.94	25.49	22.17	18.7	28.18	28.63	21.56	18.3	26.57	27.02	21.78	18.8	25.7	26.2	24.2	21.6	25.7	26.2	24.2	21.6	25.7	26.2	24.2	21.6						
80	MBh	234.3	237.5	244.4	254.9	232.2	235.5	242.3	252.8	226.2	229.5	236.3	246.8	215.9	219.1	226.0	236.5	203.3	206.5	213.4	223.9	191.7	195.0	201.8	212.3	185.5	188.8	195.6	206.1	185.5	188.8	195.6	206.1	185.5	188.8	195.6	206.1						
	S/T	1.00	0.82	0.69	0.55	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.81	0.67	1.00	1.00	1.00	0.78	1.00	1.00	1.00	0.78	1.00	1.00	0.78							
	ΔT	30.43	25.27	21.83	18.2	30.16	25.24	21.84	18.2	29.38	25.32	22.04	18.6	28.04	24.72	21.63	18.4	26.40	26.82	21.02	18.0	24.90	25.32	21.19	18.5	24.1	24.5	25.4	21.0	24.1	24.5	25.4	21.0	24.1	24.5	25.4	21.0						
7500	MBh	236.3	239.5	246.4	256.9	234.2	237.5	244.3	254.8	228.2	231.5	238.3	248.8	217.9	221.1	228.0	238.5	205.2	208.5	215.4	225.9	193.7	197.0	203.8	214.3	187.5	190.8	197.6	208.1	187.5	190.8	197.6	208.1	187.5	190.8	197.6	208.1						
	S/T	1.00	0.84	0.71	0.57	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.81	1.00	1.00	0.81							
	ΔT	28.64	24.41	21.19	17.8	28.39	24.38	21.19	17.8	27.66	24.44	21.37	18.1	26.41	23.86	20.97	17.9	24.88	25.27	20.36	17.6	23.48	23.88	20.51	18.0	22.7	23.1	24.0	20.3	22.7	23.1	24.0	20.3	22.7	23.1	24.0	20.3						
8000	MBh	238.5	241.7	248.6	259.1	236.4	239.7	246.5	257.0	230.4	233.7	240.5	251.0	220.1	223.3	230.2	240.7	207.5	210.7	217.6	228.1	195.9	199.2	206.1	216.5	189.7	193.0	199.8	210.3	189.7	193.0	199.8	210.3	189.7	193.0	199.8	210.3						
	S/T	1.00	0.86	0.72	0.58	1.00	0.86	0.73	0.59	1.00	0.89	0.75	0.62	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.84	0.71	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.82	1.00	1.00	0.82							
	ΔT	27.10	23.49	20.44	17.2	26.87	23.45	20.44	17.3	26.18	23.51	20.61	17.5	25.01	25.38	20.21	17.3	23.58	23.94	19.64	17.0	22.27	22.63	19.77	17.4	21.6	21.9	22.7	19.6	21.6	21.9	22.7	19.6	21.6	21.9	22.7	19.6						

		Shaded area reflects ACCA (TVA) conditions																																									
		65						75						85						95						105						115						125					
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
6000	MBh	234.7	238.0	244.9	255.3	232.7	235.9	242.8	253.3	226.7	229.9	236.8	247.3	216.3	219.6	226.5	237.0	203.7	207.0	213.8	224.3	192.2	195.4	202.3	212.8	186.0	189.2	196.1	206.6	186.0	189.2	196.1	206.6	186.0	189.2	196.1	206.6	186.0	189.2	196.1	206.6		
	S/T	1.00	0.85	0.72	0.58	1.00	0.85	0.72	0.58	1.00	1.00	0.75	0.61	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.65	1.00	1.00	0.84	0.70	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.81	1.00	1.00	0.81			
	ΔT	35.57	30.60	26.60	22.4	35.25	30.55	26.60	22.4	34.34	34.84	26.82	22.8	32.78	33.27	26.30	22.5	30.87	31.36	25.52	22.1	29.12	29.61	25.68	22.5	28.2	28.7	29.7	25.5	28.2	28.7	29.7	25.5	28.2	28.7	29.7	25.5	28.2	28.7	29.7	25.5		
6500	MBh	236.4	239.6	246.5	257.0	234.3	237.5	244.4	254.9	228.3	231.5	238.4	248.9	218.0	221.2	228.1	238.6	205.3	208.6	215.5	225.9	193.8	197.1	203.9	214.4	187.6	190.8	197.7	208.2	187.6	190.8	197.7	208.2	187.6	190.8	197.7	208.2	187.6	190.8	197.7	208.2		
	S/T	1.00	0.89	0.76	0.62	1.00	0.89	0.76	0.62	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.74	0.60	1.00	1.00	1.00	0.85	1.00	1.00	1.00	0.85	1.00	1.00	1.00	0.85	1.00	1.00	0.85			
	ΔT	33.06	29.75	26.07	22.2	32.77	29.70	26.06	22.2	31.93	32.38	26.23	22.6	30.48	30.94	25.69	22.2	28.72	29.17	24.92	21.7	27.11	27.56	28.52	22.1	26.2	26.7	27.7	24.8	26.2	26.7	27.7	24.8	26.2	26.7	27.7	24.8	26.2	26.7	27.7	24.8		
85	MBh	238.1	241.4	248.3	258.8	236.1	239.3	246.2	256.7	230.1	233.3	240.2	250.7	219.8	223.0	229.9	240.4	207.1	210.4	217.2	227.7	195.6	198.9	205.7	216.2	189.4	192.6	199.5	210.0	189.4	192.6	199.5	210.0	189.4	192.6	199.5	210.0	189.4	192.6	199.5	210.0		
	S/T	1.00	0.92	0.79	0.65	1.00	0.92	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.77	0.63	1.00	1.00	1.00	0.88	1.00	1.00	1.00	0.88	1.00	1.00	1.00	0.88	1.00	1.00	0.88			
	ΔT	30.93	28.77	25.34	21.8	30.66	28.71	25.33	21.8	29.88	30.30	25.47	22.1	28.54	28.96	24.94	21.7	26.90	27.32	24.17	21.2	25.40	25.83	26.72	21.6	24.6	25.0	25.9	24.1	24.6	25.0	25.9	24.1	24.6	25.0	25.9	24.1	24.6	25.0	25.9	24.1		
7500	MBh	240.1	243.4	250.3	260.7	238.1	241.3	248.2	258.7	232.1	235.3	242.2	252.7	221.7	225.0	231.9	242.4	209.1	212.4	219.2	229.7	197.6	200.8	207.7	218.2	191.4	194.6	201.5	212.0	191.4	194.6	201.5	212.0	191.4	194.6	201.5	212.0	191.4	194.6	201.5	212.0		
	S/T	1.00	0.94	0.81	0.67	1.00	0.95	0.81	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.79	0.65	1.00	1.00	1.00	0.90	1.00	1.00	1.00	0.90	1.00	1.00	1.00	0.90	1.00	1.00	0.90			
	ΔT	29.11	27.71	24.50	21.1	28.86	27.65	24.48	21.2	28.13	28.52	24.60	21.4	26.88	27.27	24.08	21.1	25.35	25.74	23.34	20.6	23.95	24.34	25.18	20.9	23.2	23.6	24.4	23.2	23.2	23.6	24.4	23.2	23.2	23.6	24.4	23.2	23.2	23.6	24.4	23.2		
8000	MBh	242.4	245.6	252.5	263.0	240.3	243.5	250.4	260.9	234.3	237.5	244.4	254.9	224.0	227.2	234.1	244.6	211.3	214.6	221.5	231.9	199.8	203.1	209.9	220.4	193.6	196.8	203.7	214.2	193.6	196.8	203.7	214.2	193.6	196.8	203.7	214.2	193.6	196.8	203.7	214.2		
	S/T	1.00	0.95	0.82	0.68	1.00	0.96	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.75	1.00	1.00	0.80	0.66	1.00	1.00	1.00	0.92	1.00	1.00	1.00	0.92	1.00	1.00	1.00	0.92	1.00	1.00	0.92			
	ΔT	27.54	26.61	23.58	20.4	27.31	26.55	23.56	20.4	26.62	26.99	23.67	20.7	25.45	25.82	23.17	20.4	24.02	24.38	22.46	19.9	22.71	23.07	23.86	20.1	22.0	22.4	23.1	22.4	22.0	22.4	23.1	22.4	22.0	22.4	23.1							

		Outdoor Ambient Temperature																							
		65			75			85			95			105			115			125					
		Entering Indoor Wet Bulb Temperature																							
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
6000	MBh	230.9	234.1	241.0	251.5	228.8	232.1	238.9	249.4	222.8	226.0	232.9	243.4	212.5	215.7	222.6	233.1	199.8	203.1	210.0	220.5	188.3	191.6	198.4	208.9
	S/T	0.82	0.75	0.62	0.48	1.00	0.76	0.62	0.49	1.00	0.78	0.65	0.51	1.00	0.80	0.67	0.53	1.00	1.00	0.69	0.55	1.00	1.00	0.74	0.60
	ΔT	28.83	26.62	22.59	18.3	34.67	26.60	22.62	18.4	33.76	26.74	22.91	18.8	32.19	26.14	22.53	18.7	30.28	30.77	21.94	18.4	28.53	29.03	22.23	19.0
6500	MBh	232.5	235.7	242.6	253.1	230.4	233.7	240.5	251.0	224.4	227.7	234.5	245.0	214.1	217.3	224.2	234.7	201.5	204.7	211.6	222.1	189.9	193.2	200.1	210.5
	S/T	0.86	0.79	0.66	0.52	1.00	0.80	0.66	0.53	1.00	0.82	0.69	0.55	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.59	1.00	1.00	0.78	0.64
	ΔT	28.07	26.03	22.32	18.4	32.23	26.00	22.34	18.4	31.39	26.10	22.58	18.8	29.94	25.49	22.17	18.7	28.18	28.63	21.56	18.3	26.57	27.02	21.78	18.8
7000	MBh	234.3	237.5	244.4	254.9	232.2	235.5	242.3	252.8	226.2	229.5	236.3	246.8	215.9	219.1	226.0	236.5	203.3	206.5	213.4	223.9	191.7	195.0	201.8	212.3
	S/T	1.00	0.82	0.69	0.55	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.81	0.67
	ΔT	30.43	25.27	21.83	18.2	30.16	25.24	21.84	18.2	29.38	25.32	22.04	18.6	28.04	24.72	21.63	18.4	26.40	26.82	21.02	18.0	24.90	25.32	21.19	18.5
7500	MBh	236.3	239.5	246.4	256.9	234.2	237.5	244.3	254.8	228.2	231.5	238.3	248.8	217.9	221.1	228.0	238.5	205.2	208.5	215.4	225.9	193.7	197.0	203.8	214.3
	S/T	1.00	0.84	0.71	0.57	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69
	ΔT	28.64	24.41	21.19	17.8	28.39	24.38	21.19	17.8	27.66	24.44	21.37	18.1	26.41	23.86	20.97	17.9	24.88	25.27	20.36	17.6	23.48	23.88	20.51	18.0
8000	MBh	238.5	241.7	248.6	259.1	236.4	239.7	246.5	257.0	230.4	233.7	240.5	251.0	220.1	223.3	230.2	240.7	207.5	210.7	217.6	228.1	195.9	199.2	206.1	216.5
	S/T	1.00	0.86	0.72	0.58	1.00	0.86	0.73	0.59	1.00	0.89	0.75	0.62	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.84	0.71
	ΔT	27.10	23.49	20.44	17.2	26.87	23.45	20.44	17.3	26.18	23.51	20.61	17.5	25.01	25.38	20.21	17.3	23.58	23.94	19.64	17.0	22.27	22.63	19.77	17.4
		Shaded area reflects ACCA (TVA) conditions																							
		Entering Indoor Wet Bulb Temperature																							
90	MBh	230.9	234.1	241.0	251.5	228.8	232.1	238.9	249.4	222.8	226.0	232.9	243.4	212.5	215.7	222.6	233.1	199.8	203.1	210.0	220.5	188.3	191.6	198.4	208.9
	S/T	0.82	0.75	0.62	0.48	1.00	0.76	0.62	0.49	1.00	0.78	0.65	0.51	1.00	0.80	0.67	0.53	1.00	1.00	0.69	0.55	1.00	1.00	0.74	0.60
	ΔT	28.83	26.62	22.59	18.3	34.67	26.60	22.62	18.4	33.76	26.74	22.91	18.8	32.19	26.14	22.53	18.7	30.28	30.77	21.94	18.4	28.53	29.03	22.23	19.0
105	MBh	232.5	235.7	242.6	253.1	230.4	233.7	240.5	251.0	224.4	227.7	234.5	245.0	214.1	217.3	224.2	234.7	201.5	204.7	211.6	222.1	189.9	193.2	200.1	210.5
	S/T	0.86	0.79	0.66	0.52	1.00	0.80	0.66	0.53	1.00	0.82	0.69	0.55	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.59	1.00	1.00	0.78	0.64
	ΔT	28.07	26.03	22.32	18.4	32.23	26.00	22.34	18.4	31.39	26.10	22.58	18.8	29.94	25.49	22.17	18.7	28.18	28.63	21.56	18.3	26.57	27.02	21.78	18.8
115	MBh	234.3	237.5	244.4	254.9	232.2	235.5	242.3	252.8	226.2	229.5	236.3	246.8	215.9	219.1	226.0	236.5	203.3	206.5	213.4	223.9	191.7	195.0	201.8	212.3
	S/T	1.00	0.82	0.69	0.55	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.81	0.67
	ΔT	30.43	25.27	21.83	18.2	30.16	25.24	21.84	18.2	29.38	25.32	22.04	18.6	28.04	24.72	21.63	18.4	26.40	26.82	21.02	18.0	24.90	25.32	21.19	18.5
125	MBh	236.3	239.5	246.4	256.9	234.2	237.5	244.3	254.8	228.2	231.5	238.3	248.8	217.9	221.1	228.0	238.5	205.2	208.5	215.4	225.9	193.7	197.0	203.8	214.3
	S/T	1.00	0.84	0.71	0.57	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69
	ΔT	28.64	24.41	21.19	17.8	28.39	24.38	21.19	17.8	27.66	24.44	21.37	18.1	26.41	23.86	20.97	17.9	24.88	25.27	20.36	17.6	23.48	23.88	20.51	18.0
125	MBh	238.5	241.7	248.6	259.1	236.4	239.7	246.5	257.0	230.4	233.7	240.5	251.0	220.1	223.3	230.2	240.7	207.5	210.7	217.6	228.1	195.9	199.2	206.1	216.5
	S/T	1.00	0.86	0.72	0.58	1.00	0.86	0.73	0.59	1.00	0.89	0.75	0.62	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.84	0.71
	ΔT	27.10	23.49	20.44	17.2	26.87	23.45	20.44	17.3	26.18	23.51	20.61	17.5	25.01	25.38	20.21	17.3	23.58	23.94	19.64	17.0	22.27	22.63	19.77	17.4
		Shaded area reflects ACCA (TVA) conditions																							
		Entering Indoor Wet Bulb Temperature																							
90	MBh	230.9	234.1	241.0	251.5	228.8	232.1	238.9	249.4	222.8	226.0	232.9	243.4	212.5	215.7	222.6	233.1	199.8	203.1	210.0	220.5	188.3	191.6	198.4	208.9
	S/T	0.82	0.75	0.62	0.48	1.00	0.76	0.62	0.49	1.00	0.78	0.65	0.51	1.00	0.80	0.67	0.53	1.00	1.00	0.69	0.55	1.00	1.00	0.74	0.60
	ΔT	28.83	26.62	22.59	18.3	34.67	26.60	22.62	18.4	33.76	26.74	22.91	18.8	32.19	26.14	22.53	18.7	30.28	30.77	21.94	18.4	28.53	29.03	22.23	19.0
105	MBh	232.5	235.7	242.6	253.1	230.4	233.7	240.5	251.0	224.4	227.7	234.5	245.0	214.1	217.3	224.2	234.7	201.5	204.7	211.6	222.1	189.9	193.2	200.1	210.5
	S/T	0.86	0.79	0.66	0.52	1.00	0.80	0.66	0.53	1.00	0.82	0.69	0.55	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.59	1.00	1.00	0.78	0.64
	ΔT	28.07	26.03	22.32	18.4	32.23	26.00	22.34	18.4	31.39	26.10	22.58	18.8	29.94	25.49	22.17	18.7	28.18	28.63	21.56	18.3	26.57	27.02	21.78	18.8
115	MBh	234.3	237.5	244.4	254.9	232.2	235.5	242.3	252.8	226.2	229.5	236.3	246.8	215.9	219.1	226.0	236.5	203.3	206.5	213.4	223.9	191.7	195.0	201.8	212.3
	S/T	1.00	0.82	0.69	0.55	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.81	0.67
	ΔT	30.43	25.27	21.83	18.2	30.16	25.24	21.84	18.2	29.38	25.32	22.04	18.6	28.04	24.72	21.63	18.4	26.40	26.82	21.02	18.0	24.90	25.32	21.19	18.5
125	MBh	236.3	239.5	246.4	256.9	234.2	237.5	244.3	254.8	228.2	231.5	238.3	248.8	217.9	221.1	228.0	238.5	205.2	208.5	215.4	225.9	193.7	197.0	203.8	214.3
	S/T	1.00	0.84	0.71	0.57	1.00	0.85	0.72	0.58	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.83	0.69
	ΔT	28.64	24.41	21.19	17.8	28.39	24.38	21.19	17.8	27.66	24.44	21.37	18.1	26.41	23.86	20.97	17.9	24.88	25.27	20.36	17.6	23.48	23.88	20.51	18.0
125	MBh	238.5	241.7	248.6	259.1	236.4	239.7	246.5	257.0	230.4	233.7	240.5	251.0	220.1	223.3	230.2	240.7	207.5	210.7	217.6	228.1	195.9	199.2	206.1	216.5
	S/T	1.00	0.86	0.72	0.58	1.00	0.86	0.73	0.59	1.00	0.89	0.75	0.62	1.00	1.00	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.84	0.71
	ΔT	27.10	23.49	20.44	17.2	26.87	23.45	20.44	17.3	26.18	23.51	20.61	17.5	25.01	25.38	20.21	17.3	23.58	23.94	19.64	17.0	22.27	22.63	19.77	17.4
		Shaded area reflects ACCA (TVA) conditions																							
		Entering Indoor Wet Bulb Temperature																							

DSH1803D STANDARD STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1	0.2	4869	602	628	0.41	0.43
	0.4	4552	635	666	0.44	0.46
	0.6	4164	673	710	0.46	0.49
	0.8	3709	717	760	0.49	0.52
	1	3192	766	817	0.53	0.56
	1.2	2625	820	878	0.56	0.60
T2	0.2	7669	703	777	1.17	1.30
	0.4	7217	755	837	1.26	1.40
	0.6	6745	808	898	1.35	1.50
	0.8	6266	862	958	1.44	1.60
	1	5793	915	1018	1.53	1.70
	1.2	5338	967	1075	1.62	1.80
T3	0.2	7503	697	769	1.07	1.18
	0.4	7054	749	828	1.15	1.27
	0.6	6581	802	889	1.23	1.36
	0.8	6097	856	951	1.31	1.46
	1	5618	910	1011	1.39	1.55
	1.2	5156	963	1069	1.47	1.64
T4	0.2	7867	710	787	1.23	1.36
	0.4	7414	762	847	1.32	1.46
	0.6	6943	815	907	1.41	1.57
	0.8	6468	868	967	1.50	1.67
	1	6002	921	1025	1.59	1.77
	1.2	5557	972	1081	1.68	1.87
T5	0.2	8322	727	810	1.35	1.50
	0.4	7865	778	869	1.44	1.61
	0.6	7399	830	927	1.54	1.72
	0.8	6934	882	985	1.64	1.83
	1	6481	933	1040	1.73	1.93
	1.2	6052	982	1093	1.82	2.03
T6	0.2	7669	703	777	1.17	1.30
	0.4	7217	755	837	1.26	1.40
	0.6	6745	808	898	1.35	1.50
	0.8	6266	862	958	1.44	1.60
	1	5793	915	1018	1.53	1.70
	1.2	5338	967	1075	1.62	1.80
T7	0.2	7867	710	787	1.23	1.36
	0.4	7414	762	847	1.32	1.46
	0.6	6943	815	907	1.41	1.57
	0.8	6468	868	967	1.50	1.67
	1	6002	921	1025	1.59	1.77
	1.2	5557	972	1081	1.68	1.87
T8	0.2	8226	723	806	1.32	1.47
	0.4	7770	775	864	1.42	1.58
	0.6	7302	827	923	1.51	1.69
	0.8	6835	879	981	1.61	1.79
	1	6380	931	1037	1.70	1.90
	1.2	5948	980	1090	1.79	1.99
T9	0.2	7867	710	787	1.23	1.36
	0.4	7414	762	847	1.32	1.46
	0.6	6943	815	907	1.41	1.57
	0.8	6468	868	967	1.50	1.67
	1	6002	921	1025	1.59	1.77
	1.2	5557	972	1081	1.68	1.87
T10	0.2	8322	727	810	1.35	1.50
	0.4	7865	778	869	1.44	1.61
	0.6	7399	830	927	1.54	1.72
	0.8	6934	882	985	1.64	1.83
	1	6481	933	1040	1.73	1.93
	1.2	6052	982	1093	1.82	2.03

DSH2403D STANDARD STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1	0.2	4869	602	628	0.41	0.43
	0.4	4552	635	666	0.44	0.46
	0.6	4164	673	710	0.46	0.49
	0.8	3709	717	760	0.49	0.52
	1	3192	766	817	0.53	0.56
	1.2	2625	820	878	0.56	0.60
T2	0.2	7253	688	756	1.07	1.17
	0.4	6809	739	815	1.15	1.27
	0.6	6335	793	877	1.23	1.36
	0.8	5846	847	939	1.32	1.46
	1	5357	902	1001	1.40	1.56
	1.2	4882	956	1061	1.49	1.65
T3	0.2	8481	732	818	1.39	1.56
	0.4	8023	784	876	1.49	1.67
	0.6	7558	835	934	1.59	1.78
	0.8	7095	887	991	1.69	1.88
	1	6647	937	1045	1.78	1.99
	1.2	6222	985	1097	1.88	2.09
T4	0.2	9948	791	894	1.91	2.16
	0.4	9472	839	945	2.03	2.28
	0.6	8999	887	994	2.14	2.40
	0.8	8536	933	1042	2.25	2.51
	1	8093	977	1087	2.36	2.62
	1.2	7678	1019	1129	2.46	2.72
T5	0.2	10371	817	923	2.16	2.44
	0.4	9877	863	971	2.28	2.57
	0.6	9389	909	1017	2.41	2.69
	0.8	8915	953	1062	2.52	2.81
	1	8464	995	1104	2.63	2.92
	1.2	8044	1035	1143	2.74	3.02
T6	0.2	8668	739	828	1.45	1.62
	0.4	8209	790	885	1.55	1.73
	0.6	7745	841	942	1.65	1.85
	0.8	7285	892	997	1.75	1.95
	1	6840	942	1050	1.84	2.06
	1.2	6420	989	1101	1.94	2.16
T7	0.2	9223	760	855	1.62	1.83
	0.4	8761	810	910	1.73	1.94
	0.6	8297	860	964	1.84	2.06
	0.8	7842	908	1016	1.94	2.17
	1	7403	956	1066	2.04	2.28
	1.2	6989	1001	1112	2.14	2.37
T8	0.2	9731	781	882	1.81	2.05
	0.4	9260	830	934	1.92	2.17
	0.6	8792	878	985	2.04	2.29
	0.8	8333	925	1034	2.15	2.40
	1	7893	970	1080	2.25	2.51
	1.2	7479	1013	1123	2.35	2.61
T9	0.2	9948	791	894	1.91	2.16
	0.4	9472	839	945	2.03	2.28
	0.6	8999	887	994	2.14	2.40
	0.8	8536	933	1042	2.25	2.51
	1	8093	977	1087	2.36	2.62
	1.2	7678	1019	1129	2.46	2.72
T10	0.2	10371	817	923	2.16	2.44
	0.4	9877	863	971	2.28	2.57
	0.6	9389	909	1017	2.41	2.69
	0.8	8915	953	1062	2.52	2.81
	1	8464	995	1104	2.63	2.92
	1.2	8044	1035	1143	2.74	3.02

Shaded speed tap- Airflow for supplemental heat.

** (T1) is part load only

15 Ton Models: DSH1803D, DSH1804D, DSH1807D with DDC Control • Standard Static • Downflow

CFM	0.2					0.4					0.6				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4000	592	615	25	0.31	0.32	630	659	28	0.40	0.41	683	723	30	0.52	0.55
4300	598	622	27	0.37	0.38	639	672	30	0.47	0.49	696	741	33	0.60	0.64
4600	604	631	29	0.43	0.45	649	685	32	0.54	0.57	709	760	35	0.69	0.74
4900	611	641	32	0.50	0.52	659	700	34	0.61	0.65	723	779	37	0.77	0.83
5200	618	652	34	0.56	0.59	670	716	36	0.69	0.74	738	800	39	0.86	0.94
5500	626	664	36	0.63	0.67	682	733	38	0.77	0.82	752	820	41	0.95	1.04
5800	635	677	38	0.70	0.74	695	751	40	0.85	0.92	766	840	43	1.05	1.15
6100	645	692	40	0.77	0.82	707	769	42	0.93	1.01	780	859	46	1.14	1.26
6400	655	707	42	0.84	0.91	720	787	44	1.02	1.11	793	877	48	1.24	1.37
6700	666	723	44	0.92	1.00	733	806	46	1.10	1.21	806	894	50	1.33	1.48
7000	677	740	46	0.99	1.09	745	823	48	1.19	1.31	817	910	52	1.43	1.59
CFM	0.8					1					1.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4000	752	808	34	0.69	0.74	833	906	37	0.90	0.98	913	1003	40	1.11	1.22
4300	768	830	36	0.79	0.85	849	929	39	1.00	1.10	927	1023	42	1.22	1.35
4600	784	852	38	0.88	0.96	865	950	42	1.11	1.22	940	1040	44	1.33	1.47
4900	800	874	40	0.98	1.07	879	970	44	1.21	1.34	951	1054	47	1.44	1.59
5200	815	895	43	1.08	1.19	892	988	46	1.32	1.46	961	1067	49	1.54	1.71
5500	830	915	45	1.18	1.30	904	1003	48	1.42	1.58	970	1078	51	1.65	1.83
5800	843	933	47	1.28	1.42	915	1017	50	1.53	1.70	977	1087	53	1.75	1.95
6100	855	950	49	1.38	1.54	924	1029	52	1.63	1.81	984	1095	55	1.85	2.06
6400	867	965	51	1.48	1.65	933	1040	54	1.73	1.93	990	1102	56	1.95	2.17
6700	877	978	53	1.58	1.77	941	1049	56	1.83	2.04	996	1108	58	2.05	2.28
7000	886	990	55	1.68	1.88	948	1057	58	1.93	2.15	1002	1113	60	2.16	2.40

20 Ton Models: DSH2403D, DSH2404D, DSH2407D with DDC Control • Standard Static • Downflow

CFM	0.2					0.4					0.6				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4800	608	637	31	0.47	0.50	656	695	33	0.59	0.62	719	773	36	0.74	0.80
5200	618	652	34	0.56	0.59	670	716	36	0.69	0.74	738	800	39	0.86	0.94
5600	629	668	36	0.65	0.69	686	739	39	0.79	0.85	757	827	42	0.98	1.08
6000	642	687	39	0.75	0.80	703	763	42	0.90	0.98	776	853	45	1.11	1.22
6400	655	707	42	0.84	0.91	720	787	44	1.02	1.11	793	877	48	1.24	1.37
6800	670	729	44	0.94	1.03	737	811	47	1.13	1.25	809	900	50	1.36	1.52
7200	685	751	47	1.05	1.15	753	834	50	1.25	1.38	824	920	53	1.49	1.66
7600	700	773	49	1.15	1.27	768	856	52	1.37	1.52	838	938	56	1.62	1.81
8000	715	794	52	1.26	1.40	783	876	55	1.49	1.66	851	954	58	1.74	1.96
8400	729	814	54	1.37	1.53	797	894	57	1.61	1.80	863	969	61	1.88	2.11
8800	743	833	57	1.48	1.66	810	911	60	1.73	1.95	877	984	64	2.03	2.28
CFM	0.8					1					1.2				
	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2	RPM1	RPM2	DDC%	BHP1	BHP2
4800	795	867	40	0.95	1.03	875	964	43	1.18	1.30	948	1050	46	1.40	1.55
5200	815	895	43	1.08	1.19	892	988	46	1.32	1.46	961	1067	49	1.54	1.71
5600	834	921	45	1.22	1.34	908	1008	49	1.46	1.62	972	1081	51	1.68	1.87
6000	851	944	48	1.35	1.50	921	1025	51	1.59	1.77	982	1092	54	1.82	2.02
6400	867	965	51	1.48	1.65	933	1040	54	1.73	1.93	990	1102	56	1.95	2.17
6800	880	982	54	1.62	1.80	943	1052	57	1.86	2.08	998	1110	59	2.09	2.32
7200	892	997	56	1.75	1.95	953	1063	59	2.00	2.23	1006	1117	62	2.23	2.48
7600	904	1011	59	1.88	2.10	962	1073	62	2.14	2.38	1016	1126	65	2.41	2.67
8000	915	1023	62	2.02	2.26	974	1084	65	2.31	2.57	1033	1141	70	2.70	2.99
8400	927	1036	65	2.18	2.44	992	1101	70	2.59	2.87					
8800	947	1056	69	2.44	2.72										

DSH180W HIGH STATC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1	0.2	6291	710	773	0.79	0.86
	0.4	5939	752	812	0.84	0.91
	0.6	5575	796	853	0.89	0.95
	0.8	5202	843	897	0.94	1.00
	1	4822	891	942	0.99	1.05
	1.2	4440	939	987	1.05	1.10
	1.4	4059	988	1033	1.10	1.15
	1.6	3682	1037	1078	1.16	1.20
	1.8	3314	1084	1122	1.21	1.25
	2	2958	1129	1164	1.26	1.30
T2	2.2	2615	1172	1203	1.31	1.34
	0.2	10551	859	895	2.15	2.24
	0.4	10212	908	940	2.27	2.35
	0.6	9868	957	985	2.39	2.46
	0.8	9523	1006	1030	2.52	2.58
	1	9180	1054	1075	2.64	2.69
	1.2	8844	1101	1118	2.75	2.80
	1.4	8516	1146	1159	2.87	2.90
	1.6	8200	1188	1198	2.97	3.00
	1.8	7897	1228	1234	3.07	3.09
T3	2	7607	1264	1268	3.16	3.17
	2.2	7332	1297	1298	3.24	3.24
	0.2	10997	878	909	2.33	2.41
	0.4	10659	926	954	2.46	2.53
	0.6	10318	976	1000	2.59	2.65
	0.8	9977	1024	1045	2.72	2.77
	1	9639	1072	1089	2.85	2.89
	1.2	9308	1119	1132	2.97	3.00
	1.4	8987	1162	1172	3.09	3.11
	1.6	8676	1204	1210	3.19	3.21
T4	1.8	8379	1242	1245	3.30	3.30
	2	8096	1277	1277	3.39	3.39
	2.2	7827	1309	1306	3.47	3.47
	0.2	8846	795	843	1.54	1.63
	0.4	8498	841	886	1.63	1.72
	0.6	8143	889	931	1.72	1.80
	0.8	7783	938	976	1.82	1.89
	1	7423	987	1022	1.91	1.98
	1.2	7066	1036	1067	2.01	2.07
	1.4	6715	1084	1110	2.10	2.15
	1.6	6375	1129	1152	2.19	2.23
	1.8	6046	1172	1192	2.27	2.31
	2	5731	1213	1229	2.35	2.38
	2.2	5431	1250	1263	2.42	2.45

DSH180W HIGH STATC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T5	0.2	9398	815	860	1.72	1.82
	0.4	9052	862	903	1.82	1.91
	0.6	8700	911	948	1.93	2.01
	0.8	8345	960	994	2.03	2.10
	1	7991	1009	1039	2.13	2.20
	1.2	7641	1057	1083	2.24	2.29
	1.4	7298	1104	1126	2.34	2.38
	1.6	6965	1148	1168	2.43	2.47
	1.8	6645	1191	1206	2.52	2.55
	2	6338	1230	1242	2.60	2.63
T6	2.2	6047	1266	1275	2.68	2.70
	0.2	8846	795	843	1.54	1.63
	0.4	8498	841	886	1.63	1.72
	0.6	8143	889	931	1.72	1.80
	0.8	7783	938	976	1.82	1.89
	1	7423	987	1022	1.91	1.98
	1.2	7066	1036	1067	2.01	2.07
	1.4	6715	1084	1110	2.10	2.15
	1.6	6375	1129	1152	2.19	2.23
	1.8	6046	1172	1192	2.27	2.31
T7	2	5731	1213	1229	2.35	2.38
	2.2	5431	1250	1263	2.42	2.45
	0.2	9083	803	850	1.62	1.71
	0.4	8736	850	894	1.71	1.80
	0.6	8382	898	938	1.81	1.89
	0.8	8025	947	984	1.91	1.98
	1	7667	997	1029	2.01	2.07
	1.2	7313	1045	1074	2.10	2.16
	1.4	6966	1092	1117	2.20	2.25
	1.6	6628	1137	1159	2.29	2.33
T8	1.8	6303	1180	1198	2.38	2.41
	2	5992	1220	1235	2.46	2.49
	2.2	5696	1257	1268	2.53	2.55
	0.2	9554	821	864	1.78	1.87
	0.4	9209	868	908	1.88	1.97
	0.6	8859	917	953	1.99	2.07
	0.8	8505	966	999	2.09	2.16
	1	8152	1015	1044	2.20	2.26
	1.2	7804	1063	1088	2.30	2.36
	1.4	7463	1110	1131	2.40	2.45
T8	1.6	7132	1154	1172	2.50	2.54
	1.8	6814	1196	1210	2.59	2.62
	2	6511	1234	1245	2.68	2.70
	2.2	6221	1270	1278	2.75	2.77

Shaded speed tap- Airflow for supplemental heat.

** (T1) is part load only

DSH180W HIGH STATC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T9	0.2	8846	795	843	1.54	1.63
	0.4	8498	841	886	1.63	1.72
	0.6	8143	889	931	1.72	1.80
	0.8	7783	938	976	1.82	1.89
	1	7423	987	1022	1.91	1.98
	1.2	7066	1036	1067	2.01	2.07
	1.4	6715	1084	1110	2.10	2.15
	1.6	6375	1129	1152	2.19	2.23
	1.8	6046	1172	1192	2.27	2.31
	2	5731	1213	1229	2.35	2.38
T10	2.2	5431	1250	1263	2.42	2.45
	0.2	9398	815	860	1.72	1.82
	0.4	9052	862	903	1.82	1.91
	0.6	8700	911	948	1.93	2.01
	0.8	8345	960	994	2.03	2.10
	1	7991	1009	1039	2.13	2.20
	1.2	7641	1057	1083	2.24	2.29
	1.4	7298	1104	1126	2.34	2.38
	1.6	6965	1148	1168	2.43	2.47
	1.8	6645	1191	1206	2.52	2.55
	2	6338	1230	1242	2.60	2.63
	2.2	6047	1266	1275	2.68	2.70

Shaded speed tap- Airflow for supplemental heat.

** (T1) is part load only

DSH240W - HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T1	0.2	5972	701	764	0.71	0.77
	0.4	5621	742	803	0.75	0.81
	0.6	5257	785	844	0.80	0.86
	0.8	4884	831	887	0.84	0.90
	1	4503	879	931	0.89	0.94
	1.2	4119	927	977	0.94	0.99
	1.4	3736	976	1023	0.99	1.04
	1.6	3356	1025	1068	1.04	1.08
	1.8	2984	1072	1112	1.09	1.13
	2	2622	1118	1155	1.13	1.17
T2	2.2	2275	1162	1195	1.18	1.21
	0.2	10096	841	881	1.97	2.07
	0.4	9754	889	925	2.09	2.17
	0.6	9407	938	970	2.20	2.28
	0.8	9058	988	1016	2.32	2.38
	1	8711	1036	1061	2.43	2.49
	1.2	8369	1084	1104	2.54	2.59
	1.4	8035	1129	1146	2.65	2.69
	1.6	7713	1173	1186	2.75	2.78
	1.8	7403	1213	1223	2.85	2.87
T3	2	7107	1251	1258	2.93	2.95
	2.2	6825	1285	1289	3.02	3.02
	0.2	11430	896	924	2.52	2.59
	0.4	11095	945	969	2.65	2.72
	0.6	10756	994	1015	2.79	2.85
	0.8	10419	1043	1059	2.93	2.97
	1	10085	1090	1103	3.06	3.10
	1.2	9760	1135	1145	3.19	3.22
	1.4	9444	1178	1185	3.31	3.33
	1.6	9140	1219	1222	3.42	3.43
T4	1.8	8849	1256	1256	3.53	3.53
	2	8572	1290	1287	3.62	3.61
	2.2	8308	1320	1315	3.71	3.69
	0.2	10701	865	900	2.21	2.30
	0.4	10362	914	945	2.33	2.41
	0.6	10019	963	990	2.46	2.53
	0.8	9675	1012	1035	2.58	2.64
	1	9335	1060	1080	2.71	2.75
	1.2	9000	1107	1123	2.82	2.86
	1.4	8674	1152	1164	2.94	2.97
T4	1.6	8360	1194	1202	3.05	3.07
	1.8	8059	1233	1238	3.14	3.16
	2	7771	1269	1271	3.24	3.24
	2.2	7498	1301	1301	3.32	3.32

DSH240W - HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T5	0.2	11157	884	915	2.40	2.48
	0.4	10820	933	960	2.53	2.60
	0.6	10480	982	1005	2.66	2.72
	0.8	10140	1031	1050	2.79	2.85
	1	9804	1079	1094	2.92	2.97
	1.2	9475	1125	1137	3.05	3.08
	1.4	9156	1168	1177	3.17	3.19
	1.6	8848	1209	1214	3.28	3.29
	1.8	8553	1247	1249	3.38	3.39
	2	8272	1282	1281	3.47	3.47
T6	2.2	8005	1313	1310	3.56	3.55
	0.2	9398	815	860	1.72	1.82
	0.4	9052	862	903	1.82	1.91
	0.6	8700	911	948	1.93	2.01
	0.8	8345	960	994	2.03	2.10
	1	7991	1009	1039	2.13	2.20
	1.2	7641	1057	1083	2.24	2.29
	1.4	7298	1104	1126	2.34	2.38
	1.6	6965	1148	1168	2.43	2.47
	1.8	6645	1191	1206	2.52	2.55
T7	2	6338	1230	1242	2.60	2.63
	2.2	6047	1266	1275	2.68	2.70
	0.2	9787	829	871	1.86	1.96
	0.4	9444	877	915	1.97	2.05
	0.6	9095	926	960	2.08	2.16
	0.8	8743	975	1006	2.19	2.26
	1	8393	1024	1051	2.30	2.36
	1.2	8047	1072	1095	2.41	2.46
	1.4	7710	1118	1138	2.51	2.55
	1.6	7382	1162	1178	2.61	2.64
T8	1.8	7068	1203	1216	2.70	2.73
	2	6767	1242	1251	2.79	2.81
	2.2	6482	1277	1283	2.87	2.88
	0.2	10188	845	884	2.01	2.10
	0.4	9846	893	928	2.12	2.21
	0.6	9500	942	973	2.24	2.31
	0.8	9151	991	1019	2.36	2.42
	1	8805	1040	1064	2.47	2.53
	1.2	8465	1087	1107	2.59	2.63
	1.4	8132	1133	1149	2.69	2.73
T8	1.6	7811	1176	1189	2.80	2.83
	1.8	7502	1216	1226	2.89	2.91
	2	7207	1253	1260	2.98	2.99
	2.2	6927	1287	1291	3.06	3.07

Shaded speed tap- Airflow for supplemental heat.

** (T1) is part load only

DSH240W - HIGH STATIC						
SPEED TAP	STATIC	AIRFLOW	RPM 1	RPM 2	BHP 1	BHP 2
T9	0.2	10701	865	900	2.21	2.30
	0.4	10362	914	945	2.33	2.41
	0.6	10019	963	990	2.46	2.53
	0.8	9675	1012	1035	2.58	2.64
	1	9335	1060	1080	2.71	2.75
	1.2	9000	1107	1123	2.82	2.86
	1.4	8674	1152	1164	2.94	2.97
	1.6	8360	1194	1202	3.05	3.07
	1.8	8059	1233	1238	3.14	3.16
	2	7771	1269	1271	3.24	3.24
T10	2.2	7498	1301	1301	3.32	3.32
	0.2	11157	884	915	2.40	2.48
	0.4	10820	933	960	2.53	2.60
	0.6	10480	982	1005	2.66	2.72
	0.8	10140	1031	1050	2.79	2.85
	1	9804	1079	1094	2.92	2.97
	1.2	9475	1125	1137	3.05	3.08
	1.4	9156	1168	1177	3.17	3.19
	1.6	8848	1209	1214	3.28	3.29
	1.8	8553	1247	1249	3.38	3.39
	2	8272	1282	1281	3.47	3.47
	2.2	8005	1313	1310	3.56	3.55

Shaded speed tap- Airflow for supplemental heat.


** (T1) is part load only

15 Ton Models: DSH1803W, DSH1804W, DSH1807W with DDC Control • High Static • Downflow

CFM	0.8						1						1.2						1.4					
	RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2	
4200	808	866	28	0.64	0.69		868	922	30	0.80	0.85		931	980	33	0.97	1.02		993	1037	35	1.15	1.20	
4500	818	875	30	0.73	0.78		879	931	32	0.89	0.95		942	989	34	1.07	1.12		1004	1046	37	1.26	1.31	
4800	829	884	32	0.82	0.87		890	941	34	0.99	1.04		953	998	36	1.17	1.23		1015	1055	38	1.37	1.42	
5100	839	894	33	0.91	0.97		901	950	36	1.09	1.14		964	1008	38	1.27	1.33		1026	1064	40	1.48	1.53	
5400	850	903	35	1.00	1.07		912	960	38	1.19	1.25		975	1017	40	1.38	1.44		1037	1073	42	1.59	1.64	
5700	861	912	37	1.10	1.16		923	969	39	1.29	1.35		986	1026	42	1.49	1.55		1047	1082	44	1.70	1.76	
6000	872	921	39	1.20	1.26		934	978	41	1.39	1.46		997	1035	44	1.60	1.66		1058	1090	46	1.82	1.87	
6300	883	931	41	1.30	1.37		945	988	43	1.50	1.56		1008	1044	45	1.71	1.77		1069	1099	48	1.93	1.99	
6600	894	940	43	1.40	1.47		957	997	45	1.61	1.67		1019	1053	47	1.83	1.89		1080	1107	49	2.05	2.11	
CFM	1.6						1.8						2						2.2					
	RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2	
4200	1055	1093	37	1.34	1.39		1113	1146	39	1.54	1.58		1168	1195	41	1.74	1.78		1218	1239	43	1.93	1.96	
4500	1065	1102	39	1.45	1.50		1123	1154	41	1.66	1.70		1177	1202	43	1.85	1.89		1226	1245	45	2.05	2.08	
4800	1076	1110	41	1.57	1.62		1133	1161	43	1.77	1.82		1186	1209	45	1.97	2.01		1234	1251	46	2.17	2.20	
5100	1086	1118	42	1.68	1.73		1143	1169	44	1.89	1.93		1195	1215	46	2.09	2.13		1242	1257	48	2.29	2.32	
5400	1096	1127	44	1.80	1.85		1152	1177	46	2.01	2.05		1203	1222	48	2.22	2.25		1250	1263	50	2.41	2.44	
5700	1107	1135	46	1.92	1.97		1162	1184	48	2.13	2.17		1212	1229	50	2.34	2.37		1257	1268	52	2.54	2.56	
6000	1117	1143	48	2.04	2.08		1171	1191	50	2.25	2.29		1221	1235	52	2.46	2.49		1265	1274	53	2.66	2.68	
6300	1127	1151	50	2.16	2.20		1180	1198	52	2.38	2.41		1229	1241	53	2.59	2.62		1272	1279	55	2.79	2.80	
6600	1137	1158	51	2.28	2.32		1189	1205	53	2.50	2.54		1237	1247	55	2.72	2.74		1280	1285	57	2.92	2.93	

20 Ton Models: DSH1803W, DSH1804W, DSH1807W with DDC Control • High Static • Downflow

CFM	0.8						1						1.2						1.4					
	RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2	
5600	857	909	36	1.07	1.13		919	966	39	1.25	1.32		982	1023	41	1.45	1.51		1044	1079	43	1.66	1.72	
6000	872	921	39	1.20	1.26		934	978	41	1.39	1.46		997	1035	44	1.60	1.66		1058	1090	46	1.82	1.87	
6400	886	934	41	1.33	1.40		949	991	44	1.53	1.60		1012	1047	46	1.75	1.81		1072	1102	48	1.97	2.03	
6800	901	946	44	1.47	1.54		964	1003	46	1.68	1.75		1026	1059	48	1.90	1.96		1087	1113	51	2.13	2.18	
7200	916	959	46	1.61	1.68		979	1015	49	1.83	1.90		1041	1071	51	2.06	2.12		1101	1124	53	2.30	2.34	
7600	932	971	49	1.75	1.83		994	1027	51	1.98	2.05		1056	1082	53	2.22	2.28		1114	1135	55	2.46	2.51	
8000	947	983	51	1.90	1.97		1009	1039	54	2.14	2.20		1070	1094	56	2.39	2.44		1128	1145	58	2.63	2.67	
8400	962	995	54	2.05	2.12		1024	1051	56	2.30	2.36		1085	1105	58	2.56	2.60		1142	1156	60	2.81	2.85	
8800	978	1008	56	2.21	2.28		1040	1063	59	2.47	2.53		1100	1117	61	2.73	2.77		1156	1167	63	3.00	3.03	
CFM	1.6						1.8						2						2.2					
	RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2		RPM1	RPM2	DDC%	BHP1	BHP2	
5600	1103	1132	45	1.88	1.93		1159	1182	47	2.09	2.13		1209	1226	49	2.30	2.33		1255	1267	51	2.49	2.52	
6000	1117	1143	48	2.04	2.08		1171	1191	50	2.25	2.29		1221	1235	52	2.46	2.49		1265	1274	53	2.66	2.68	
6400	1130	1153	50	2.20	2.24		1183	1201	52	2.42	2.45		1232	1243	54	2.63	2.66		1275	1281	56	2.83	2.85	
6800	1143	1163	53	2.36	2.40		1195	1210	54	2.59	2.62		1243	1251	56	2.80	2.82		1284	1288	58	3.00	3.01	
7200	1156	1174	55	2.53	2.57		1207	1219	57	2.76	2.79		1253	1259	59	2.98	2.99		1294	1295	60	3.18	3.19	
7600	1169	1183	57	2.70	2.74		1219	1228	59	2.94	2.96		1264	1268	61	3.16	3.17		1304	1302	63	3.37	3.36	
8000	1182	1193	60	2.88	2.91		1231	1237	62	3.12	3.13		1275	1276	63	3.35	3.35		1313	1309	65	3.56	3.55	
8400	1195	1203	62	3.06	3.09		1243	1246	64	3.31	3.32		1285	1284	66	3.54	3.53		1322	1316	68	3.75	3.73	
8800	1208	1213	65	3.26	3.27		1254	1255	67	3.50	3.50		1295	1291	68	3.73	3.72		1331	1323	70	3.94	3.91	

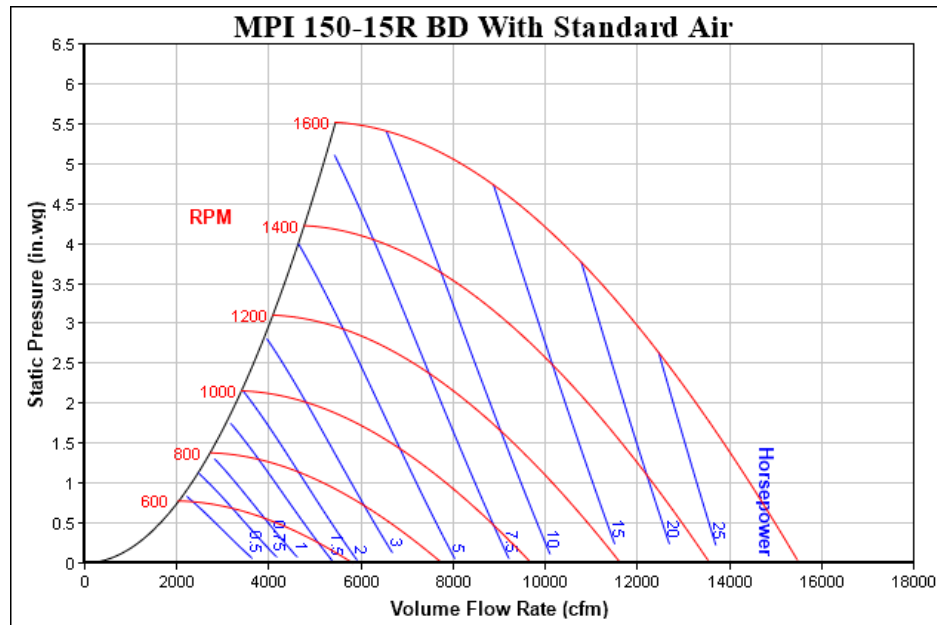

AIRFLOW PRESSURE DROP OF DOWNFLOW ECONOMIZER FOR 15 TO 20 TON ROOFTOP UNITS (100% RETURN AIR)												
SCFM	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	9500	10000
(In WG)	0.15	0.18	0.22	0.27	0.32	0.37	0.42	0.48	0.55	0.61	0.69	0.76

	MERV 8	MERV 13	ECONOMIZER
SCFM	STATIC (IN WG)	STATIC (IN WG)	STATIC (IN WG)
3000	0.06	0.08	0.08
3500	0.06	0.09	0.10
4000	0.07	0.11	0.12
4500	0.08	0.13	0.15
5000	0.09	0.14	0.18
5500	0.11	0.16	0.22
6000	0.12	0.18	0.27
6500	0.13	0.20	0.32
7000	0.14	0.22	0.37
7500	0.15	0.24	0.42
8000	0.17	0.27	0.48
8500	0.18	0.29	0.55
9000	0.19	0.31	0.61
9500	0.21	0.34	0.69
10000	0.22	0.36	0.76

Heating Data

DSH180

100 % Capacity

	OUTDOOR AMBIENT TEMPERATURE															
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0
MBh	223.8	209.3	195.0	181.0	172.0	165.3	148.5	132.9	120.2	110.7	103.8	100.0	95.2	83.2	71.2	59.2
T/R	28.0	26.2	24.4	22.6	21.5	20.7	18.6	16.6	15.0	13.9	13.0	12.5	11.9	10.4	8.9	7.4
KW	15.87	15.71	15.55	15.38	15.28	15.22	15.06	14.89	14.73	14.57	14.40	14.31	14.24	14.08	13.91	13.75
COP	4.13	3.91	3.68	3.45	3.30	3.19	2.89	2.62	2.39	2.23	2.11	2.05	1.96	1.73	1.50	1.26

DSH240

100 % Capacity

	OUTDOOR AMBIENT TEMPERATURE															
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0
290.0	290.0	270.3	251.1	232.1	220.0	210.8	187.7	166.7	149.6	136.8	127.2	122.0	115.5	99.1	82.8	66.5
33.6	33.6	31.3	29.1	26.9	25.5	24.4	21.7	19.3	17.3	15.8	14.7	14.1	13.4	11.5	9.6	7.7
20.8	20.8	20.5	20.1	19.8	19.6	19.4	19.1	18.7	18.4	18.0	17.7	17.5	17.3	17.0	16.6	16.3
4.1	4.1	3.9	3.7	3.4	3.3	3.2	2.9	2.6	2.4	2.2	2.1	2.1	2.0	1.7	1.5	1.2

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			POWERED CONVENIENCE OUTLET	POWER EXHAUST	POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSH1803D	208/230/3/60	2	25.0	178.5	4	0.5	2.7	2	3.5	10.9	-	-	-	-	-	-	88.9/88.9	110/110
											-	-	-	-	4.8	-	93.7/93.7	110/110
											-	-	-	-	-	13.9	103/103	125/125
											-	-	-	9.6/8.7	-	-	98.5/97.6	110/110
											-	-	-	9.6/8.7	4.8	-	103/102	125/125
											-	-	-	9.6/8.7	-	13.9	112/112	125/125
											EH**-3L30A	21.6/28.8	60.0/69.3	-	-	-	164/176	175/200
														-	4.8	-	169/180	175/200
														-	-	13.9	178/189	200/200
														9.6/8.7	-	-	174/184	175/200
														9.6/8.7	4.8	-	178/189	200/200
														9.6/8.7	-	13.9	187/198	200/200
											EH**-3L45A	32.4/43.2	90.1/104	-	-	-	201/219	225/225
														-	4.8	-	206/224	225/225
														-	-	13.9	215/233	225/250
														9.6/8.7	-	-	211/228	225/250
														9.6/8.7	4.8	-	216/232	225/250
														9.6/8.7	-	13.9	225/241	225/250
											EH**-3L60A	43.3/57.6	120/139	-	-	-	239/227	250/250
														-	4.8	-	244/232	250/250
														-	-	13.9	253/241	300/250
														9.6/8.7	-	-	249/236	250/250
														9.6/8.7	4.8	-	253/241	300/250
														9.6/8.7	-	13.9	263/250	300/300
DSH1803W	208/230/3/60	2	25.0	178.5	4	0.5	2.7	2	5.0	14.5	-	-	-	-	-	-	96.1/96.1	110/110
											-	-	-	-	4.8	-	101/101	125/125
											-	-	-	-	-	13.9	110/110	125/125
											-	-	-	9.6/8.7	-	-	106/105	125/125
											-	-	-	9.6/8.7	4.8	-	111/110	125/125
											-	-	-	9.6/8.7	-	13.9	120/119	125/125
											EH**-3L30A	21.6/28.8	60.0/69.3	-	-	-	171/183	175/200
														-	4.8	-	176/188	200/200
														-	-	13.9	185/197	200/200
														9.6/8.7	-	-	181/191	200/200
														9.6/8.7	4.8	-	186/196	200/200
														9.6/8.7	-	13.9	195/205	200/225
											EH**-3L45A	32.4/43.2	90.1/104	-	-	-	209/226	225/250
														-	4.8	-	213/231	225/250
														-	-	13.9	223/240	225/250
														9.6/8.7	-	-	218/235	225/250
														9.6/8.7	4.8	-	223/240	225/250
														9.6/8.7	-	13.9	232/249	250/250
											EH**-3L60A	43.3/57.6	120/139	-	-	-	246/235	250/250
														-	4.8	-	251/239	300/250
														-	-	13.9	260/249	300/250
														9.6/8.7	-	-	256/243	300/250
														9.6/8.7	4.8	-	261/248	300/250
														9.6/8.7	-	13.9	270/257	300/300

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			POWERED CONVENIENCE OUTLET	POWER EXHAUST	POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSH1804D	460/3/60	2	10.9	103	4	0.5	1.4	2	3.5	7.2	-	-	-	-	-	-	44.5	50
											-	-	-	-	2.4	-	46.9	50
											-	-	-	-	-	8.1	52.6	60
											-	-	-	4.3	-	-	48.8	50
											-	-	-	4.3	2.4	-	51.2	60
											-	-	-	4.3	-	8.1	56.9	60
											EH**-4L30A	28.8	34.6	-	-	-	87.8	90
														-	2.4	-	90.2	100
														-	-	8.1	95.9	100
														4.3	-	-	92.1	100
														4.3	2.4	-	94.5	100
														4.3	-	8.1	100	110
											EH**-4L45A	43.2	52.0	-	-	-	109	110
														-	2.4	-	112	125
														-	-	8.1	118	125
														4.3	-	-	114	125
														4.3	2.4	-	116	125
														4.3	-	8.1	122	125
											EH**-4L60A	57.6	69.3	-	-	-	114	125
														-	2.4	-	116	125
														-	-	8.1	122	125
														4.3	-	-	118	125
														4.3	2.4	-	120	125
														4.3	-	8.1	126	150
DSH1804W	460/3/60	2	10.9	103	4	0.5	1.4	2	5.0	10.6	-	-	-	-	-	-	51.3	60
											-	-	-	-	2.4	-	53.7	60
											-	-	-	-	-	8.1	59.4	70
											-	-	-	4.3	-	-	55.6	60
											-	-	-	4.3	2.4	-	58.0	60
											-	-	-	4.3	-	8.1	63.7	70
											EH**-4L30A	28.8	34.6	-	-	-	94.6	100
														-	2.4	-	97.0	100
														-	-	8.1	103	110
														4.3	-	-	98.9	100
														4.3	2.4	-	101	110
														4.3	-	8.1	107	110
											EH**-4L45A	43.2	52.0	-	-	-	116	125
														-	2.4	-	119	125
														-	-	8.1	124	125
														4.3	-	-	121	125
														4.3	2.4	-	123	125
														4.3	-	8.1	129	150
											EH**-4L60A	57.6	69.3	-	-	-	121	125
														-	2.4	-	123	125
														-	-	8.1	129	150
														4.3	-	-	125	125
														4.3	2.4	-	127	150
														4.3	-	8.1	133	150

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			POWERED CONVENIENCE OUTLET	POWER EXHAUST	POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSH1807D	575/3/60	2	8.4	78	4	0.5	1.0	2	3.5	5.0	-	-	-	-	-	-	33.0	40
											-	-	-	-	2.0	-	35.0	40
											-	-	-	-	-	8.3	41.3	45
											-	-	-	3.5	-	-	36.5	40
											-	-	-	3.5	2.0	-	38.5	45
											-	-	-	3.5	-	8.3	44.8	50
											EH**-7L30A	28.8	27.7	-	-	-	67.6	70
														-	2.0	-	69.6	70
														-	-	8.3	75.9	80
														3.5	-	-	71.1	80
														3.5	2.0	-	73.1	80
														3.5	-	8.3	79.4	80
											EH**-7L45A	43.2	41.6	-	-	-	85.0	90
														-	2.0	-	87.0	90
														-	-	8.3	93.3	100
														3.5	-	-	88.5	90
														3.5	2.0	-	90.5	100
														3.5	-	8.3	96.8	100
											EH**-7L60A	57.6	55.4	-	-	-	88.4	90
														-	2.0	-	90.4	100
														-	-	8.3	96.7	100
														3.5	-	-	91.9	100
														3.5	2.0	-	93.9	100
														3.5	-	8.3	100	110
DSH1807W	575/3/60	2	8.4	78	4	0.5	1.0	2	5.0	7.2	-	-	-	-	-	-	37.4	45
											-	-	-	-	2.0	-	39.4	45
											-	-	-	-	-	8.3	45.7	50
											-	-	-	3.5	-	-	40.9	45
											-	-	-	3.5	2.0	-	42.9	50
											-	-	-	3.5	-	8.3	49.2	50
											EH**-7L30A	28.8	27.7	-	-	-	72.0	80
														-	2.0	-	74.0	80
														-	-	8.3	80.3	90
														3.5	-	-	75.5	80
														3.5	2.0	-	77.5	80
														3.5	-	8.3	83.8	90
											EH**-7L45A	43.2	41.6	-	-	-	89.4	90
														-	2.0	-	91.4	100
														-	-	8.3	97.7	100
														3.5	-	-	92.9	100
														3.5	2.0	-	94.9	100
														3.5	-	8.3	101	110
											EH**-7L60A	57.6	55.4	-	-	-	92.8	100
														-	2.0	-	94.8	100
														-	-	8.3	101	110
														3.5	-	-	96.3	100
														3.5	2.0	-	98.3	100
														3.5	-	8.3	105	110

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			POWERED CONVENIENCE OUTLET	POWER EXHAUST	POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSH2403D	208/230/3/60	2	29.4	225	4	0.5	2.7	2	3.5	10.9	-	-	-	-	-	-	98.7/98.7	125/125
											-	-	-	-	4.8	-	103/103	125/125
											-	-	-	-	-	13.9	113/113	125/125
											-	-	-	9.6/8.7	-	-	108/107	125/125
											-	-	-	9.6/8.7	4.8	-	113/112	125/125
											-	-	-	9.6/8.7	-	13.9	122/121	150/150
											EH**-3L30A	21.6/28.8	60.0/69.3	-	-	-	174/185	175/200
														-	4.8	-	179/190	200/200
														-	-	13.9	188/199	200/200
														9.6/8.7	-	-	183/194	200/200
														9.6/8.7	4.8	-	188/199	200/200
														9.6/8.7	-	13.9	197/208	200/225
											EH**-3L45A	32.4/43.2	90.1/104	-	-	-	211/229	225/250
														-	4.8	-	216/233	225/250
														-	-	13.9	225/242	250/250
														9.6/8.7	-	-	221/237	225/250
														9.6/8.7	4.8	-	226/242	250/250
														9.6/8.7	-	13.9	235/251	250/300
											EH**-3L60A	43.3/57.6	120/139	-	-	-	249/237	250/250
														-	4.8	-	254/242	300/250
														-	-	13.9	263/251	300/300
														9.6/8.7	-	-	258/246	300/250
														9.6/8.7	4.8	-	263/251	300/300
														9.6/8.7	-	13.9	272/260	300/300
											EH**-3L75A	54.1/72.0	150/173	-	-	-	249/272	250/300
														-	4.8	-	254/277	300/300
														-	-	13.9	263/286	300/300
														9.6/8.7	-	-	258/281	300/300
														9.6/8.7	4.8	-	263/285	300/300
														9.6/8.7	-	13.9	272/295	300/300
DSH2403W	208/230/3/60	2	29.4	225	4	0.5	2.7	2	5.0	14.5	-	-	-	-	-	-	106/106	125/125
											-	-	-	-	4.8	-	111/111	125/125
											-	-	-	-	-	13.9	120/120	125/125
											-	-	-	9.6/8.7	-	-	115/115	125/125
											-	-	-	9.6/8.7	4.8	-	120/119	125/125
											-	-	-	9.6/8.7	-	13.9	129/128	150/150
											EH**-3L30A	21.6/28.8	60.0/69.3	-	-	-	181/192	200/200
														-	4.8	-	186/197	200/200
														-	-	13.9	195/206	200/225
														9.6/8.7	-	-	191/201	200/225
														9.6/8.7	4.8	-	195/206	200/225
														9.6/8.7	-	13.9	204/215	225/225
											EH**-3L45A	32.4/43.2	90.1/104	-	-	-	218/236	225/250
														-	4.8	-	223/241	225/250
														-	-	13.9	232/250	250/250
														9.6/8.7	-	-	228/244	250/250
														9.6/8.7	4.8	-	233/249	250/250
														9.6/8.7	-	13.9	242/258	250/300
											EH**-3L60A	43.3/57.6	120/139	-	-	-	256/244	300/250
														-	4.8	-	261/249	300/250
														-	-	13.9	270/258	300/300
														9.6/8.7	-	-	266/253	300/300
														9.6/8.7	4.8	-	270/258	300/300
														9.6/8.7	-	13.9	280/267	300/300
											EH**-3L75A	54.1/72.0	150/173	-	-	-	256/279	300/300
														-	4.8	-	261/284	300/300
														-	-	13.9	270/293	300/300
														9.6/8.7	-	-	266/288	300/300
														9.6/8.7	4.8	-	270/293	300/300
														9.6/8.7	-	13.9	280/302	300/350

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			POWERED CONVENIENCE OUTLET	POWER EXHAUST	POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSH2404D	460/3/60	2	13.7	130	4	0.5	1.4	2	3.5	7.2	-	-	-	-	-	-	50.8	60
											-	-	-	-	2.4	-	53.2	60
											-	-	-	-	-	8.1	58.9	70
											-	-	-	4.3	-	-	55.1	60
											-	-	-	4.3	2.4	-	57.5	70
											-	-	-	4.3	-	8.1	63.2	70
											EH**-4L30A	28.8	34.6	-	-	-	94.1	100
														-	2.4	-	96.5	100
														-	-	8.1	102	110
														4.3	-	-	98.4	100
														4.3	2.4	-	101	110
														4.3	-	8.1	107	110
											EH**-4L45A	43.2	52.0	-	-	-	116	125
														-	2.4	-	118	125
														-	-	8.1	124	125
														4.3	-	-	120	125
														4.3	2.4	-	122	125
														4.3	-	8.1	128	150
											EH**-4L60A	57.6	69.3	-	-	-	120	125
														-	2.4	-	122	125
														-	-	8.1	128	150
														4.3	-	-	124	125
														4.3	2.4	-	127	150
														4.3	-	8.1	132	150
											EH**-4L75A	72.0	86.6	-	-	-	137	150
														-	2.4	-	140	150
														-	-	8.1	146	150
														4.3	-	-	142	150
														4.3	2.4	-	144	150
														4.3	-	8.1	150	150
DSH2404W	460/3/60	2	13.7	130	4	0.5	1.4	2	5.0	10.6	-	-	-	-	-	-	57.6	70
											-	-	-	-	2.4	-	60.0	70
											-	-	-	-	-	8.1	65.7	70
											-	-	-	4.3	-	-	61.9	70
											-	-	-	4.3	2.4	-	64.3	70
											-	-	-	4.3	-	8.1	70.0	80
											EH**-4L30A	28.8	34.6	-	-	-	101	110
														-	2.4	-	103	110
														-	-	8.1	109	110
														4.3	-	-	105	110
														4.3	2.4	-	108	110
														4.3	-	8.1	113	125
											EH**-4L45A	43.2	52.0	-	-	-	123	125
														-	2.4	-	125	125
														-	-	8.1	131	150
														4.3	-	-	127	150
														4.3	2.4	-	129	150
														4.3	-	8.1	135	150
											EH**-4L60A	57.6	69.3	-	-	-	127	150
														-	2.4	-	129	150
														-	-	8.1	135	150
														4.3	-	-	131	150
														4.3	2.4	-	134	150
														4.3	-	8.1	139	150
											EH**-4L75A	72.0	86.6	-	-	-	144	150
														-	2.4	-	147	150
														-	-	8.1	152	175
														4.3	-	-	149	150
														4.3	2.4	-	151	175
														4.3	-	8.1	157	175

MODEL NUMBER	ELECTRICAL RATING	COMPRESSOR			OUTDOOR FAN MOTOR			INDOOR FAN MOTOR			OPTIONAL ELECTRIC HEAT			POWERED CONVENIENCE OUTLET	POWER EXHAUST	POWER EXHAUST (MODULATING)	POWER SUPPLY	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	FLA	MCA	MOP
DSH2407D	575/3/60	2	10.9	93.7	4	0.5	1.0	2	3.5	5.0	-	-	-	-	-	-	38.5	45
											-	-	-	-	2.0	-	40.5	50
											-	-	-	-	-	8.3	46.8	50
											-	-	-	3.5	-	-	42.0	50
											-	-	-	3.5	2.0	-	44.0	50
											-	-	-	3.5	-	8.3	50.3	60
											EH**-7L30A	28.8	27.7	-	-	-	73.1	80
														-	2.0	-	75.1	80
														-	-	8.3	81.4	90
														3.5	-	-	76.6	80
														3.5	2.0	-	78.6	80
														3.5	-	8.3	84.9	90
											EH**-7L45A	43.2	41.6	-	-	-	90.4	100
														-	2.0	-	92.4	100
														-	-	8.3	98.7	100
														3.5	-	-	93.9	100
														3.5	2.0	-	95.9	100
														3.5	-	8.3	102	110
											EH**-7L60A	57.6	55.4	-	-	-	93.9	100
														-	2.0	-	95.9	100
														-	-	8.3	102	110
														3.5	-	-	97.4	100
														3.5	2.0	-	99.4	110
														3.5	-	8.3	106	110
											EH**-7L75A	72.0	69.3	-	-	-	108	110
														-	2.0	-	110	110
														-	-	8.3	116	125
														3.5	-	-	111	125
														3.5	2.0	-	113	125
														3.5	-	8.3	120	125
DSH2407W	575/3/60	2	10.9	93.7	4	0.5	1.0	2	5.0	7.2	-	-	-	-	-	-	42.9	50
											-	-	-	-	2.0	-	44.9	50
											-	-	-	-	-	8.3	51.2	60
											-	-	-	3.5	-	-	46.4	50
											-	-	-	3.5	2.0	-	48.4	50
											-	-	-	3.5	-	8.3	54.7	60
											EH**-7L30A	28.8	27.7	-	-	-	77.5	80
														-	2.0	-	79.5	80
														-	-	8.3	85.8	90
														3.5	-	-	81.0	90
														3.5	2.0	-	83.0	90
														3.5	-	8.3	89.3	90
											EH**-7L45A	43.2	41.6	-	-	-	94.8	100
														-	2.0	-	96.8	100
														-	-	8.3	103	110
														3.5	-	-	98.3	100
														3.5	2.0	-	100	110
														3.5	-	8.3	107	110
											EH**-7L60A	57.6	55.4	-	-	-	98.3	100
														-	2.0	-	100	110
														-	-	8.3	107	110
														3.5	-	-	102	110
														3.5	2.0	-	104	110
														3.5	-	8.3	110	125
											EH**-7L75A	72.0	69.3	-	-	-	112	125
														-	2.0	-	114	125
														-	-	8.3	120	125
														3.5	-	-	116	125
														3.5	2.0	-	118	125
														3.5	-	8.3	124	125


AIR FLOW FOR ELECTRIC HEAT					
UNIT	HEATER KIT MODEL NUMBER	kW	STAGES	MINIMUM CFM	MAXIMUM CFM
15 ton HP STD Static	EH*~*L30A	30	2	5400	8300
	EH*~*L45A	45			
	EH*~*L60A	60			
15 ton HP High Static	EH*~*L30A	30	2	5500	9500
	EH*~*L45A	45			
	EH*~*L60A	60			
20 ton HP STD Static	EH*~*L30A	30	2	6500	10300
	EH*~*L45A	45			
	EH*~*L60A	60			
	EH*~*L75A	75			
20 ton HP High Static	EH*~*L30A	30	2	6100	11100
	EH*~*L45A	45			
	EH*~*L60A	60			
	EH*~*L75A	75			

HEATER KIT MODEL NUMBER NOMENCLATURE

	E	H	*	-	3	L	30	A
	1	2	3	-	4	5	6,7	8
Electric								
Heater								
Heater Type								
X								
S								
Voltage								
3								
4								
7								
Chassis								
L								
Kilowatt								
30								
45								
60								
75								
-								
A								

FLA Table for EHK

HEATER KIT MODEL NUMBER	kW	FLA
EH**~3L30A	21.6/28.8	60.0/69.3
EH**~3L45A	32.5/43.2	90.1/104
EH**~3L60A	43.3/57.6	120.0/139.0
EH**~3L75A	54.1/72.0	150.0/173.0
EH**~4L30A	28.8	34.6
EH**~4L45A	43.2	52.0
EH**~4L60A	57.6	69.3
EH**~4L75A	72.0	86.6
EH**~7L30A	28.8	27.7
EH**~7L45A	43.2	41.6
EH**~7L60A	57.6	55.4
EH**~7L75A	72.0	69.3

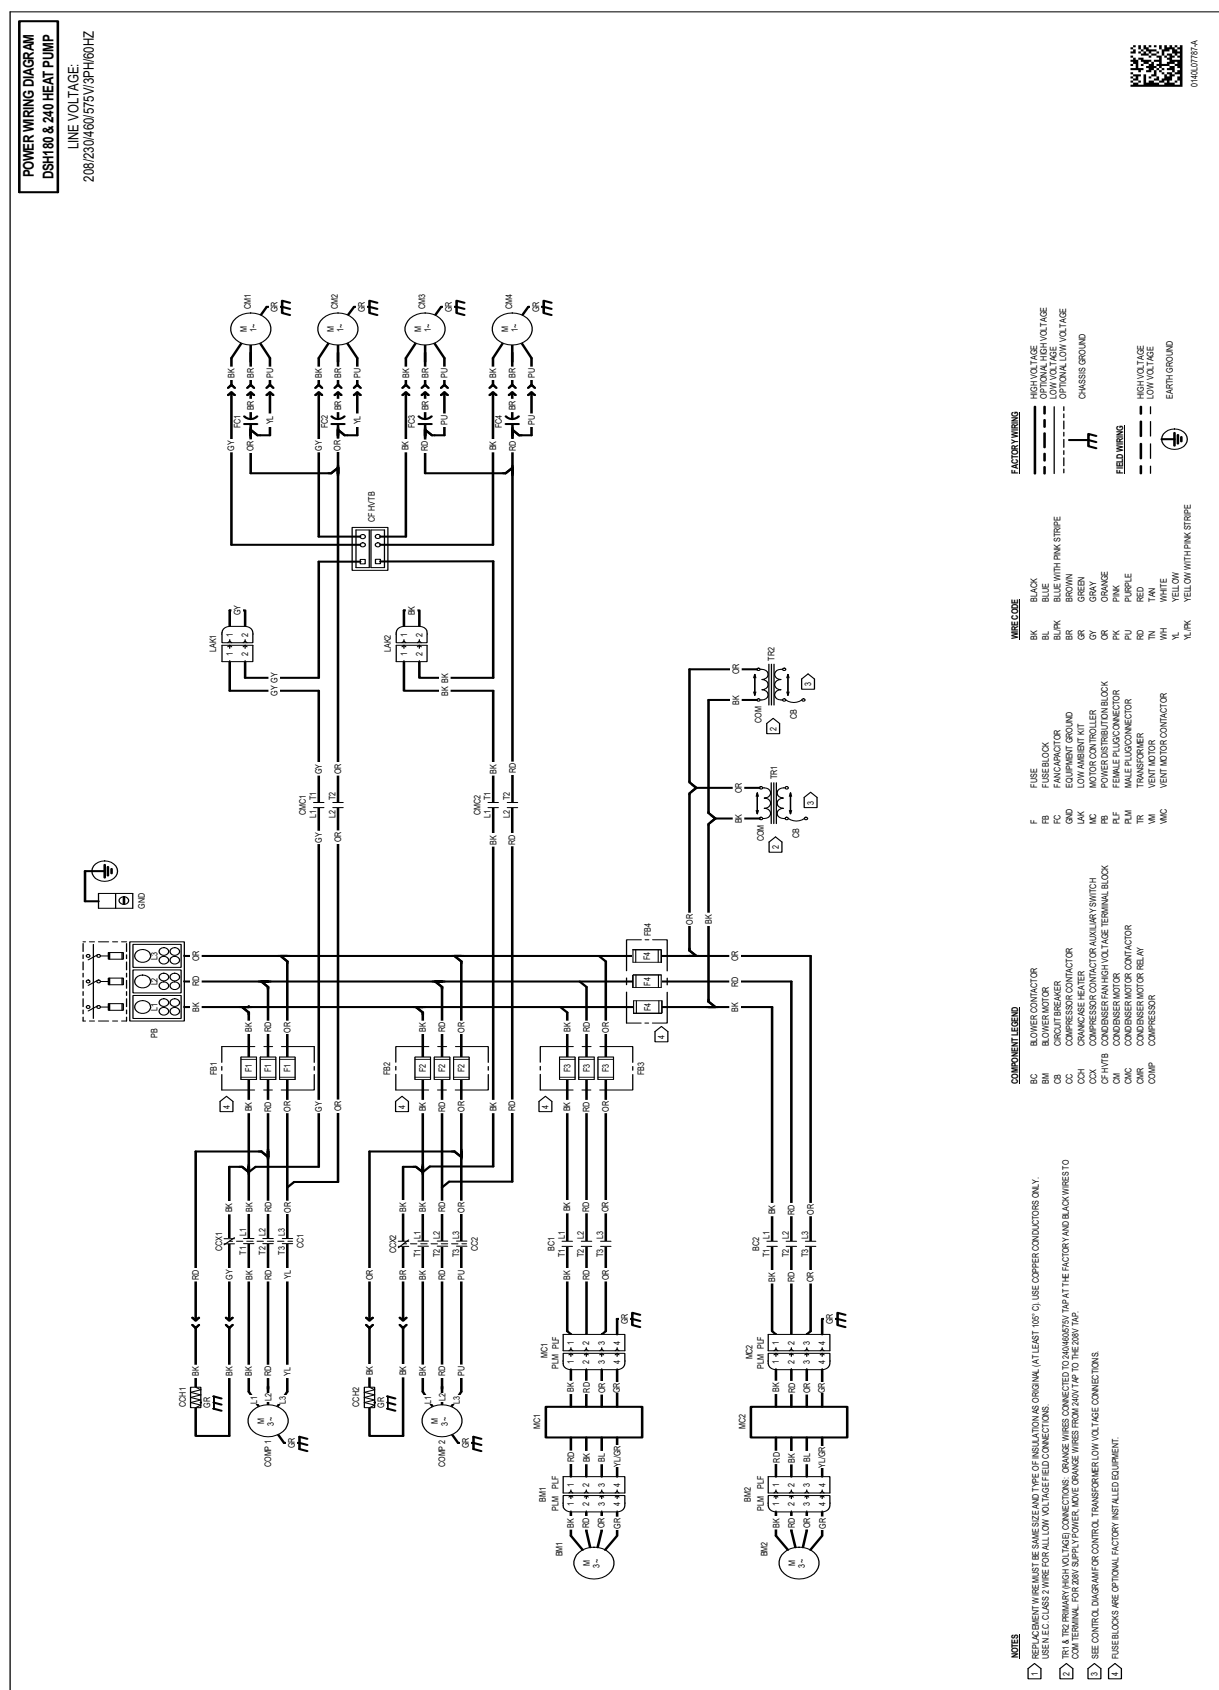


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING


High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.






Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

Electrical Entrance Locations

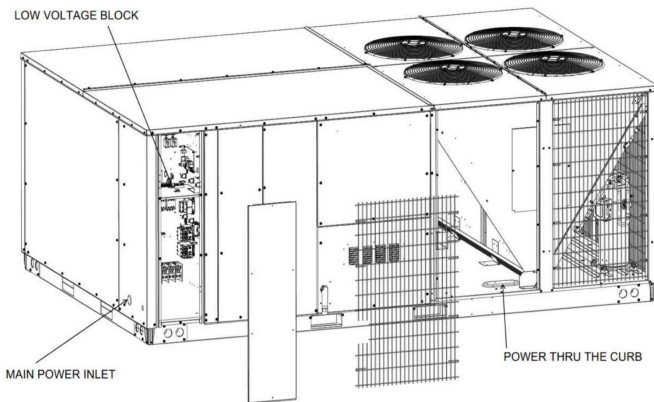

Service Clearance

Allow for recommended service clearances as shown in the image below. In situations that have multiple units, a 36" minimum clearance is required between the condenser coils. A clearance of 48" is recommended on all sides of the unit to allow service access and to ensure proper ventilation and condenser airflow. The top of the unit should be unobstructed. Provide a roof walkway along the sides of the unit for service and access to controls and components. Contact your Daikin sales representative for service requirements less than those recommended.

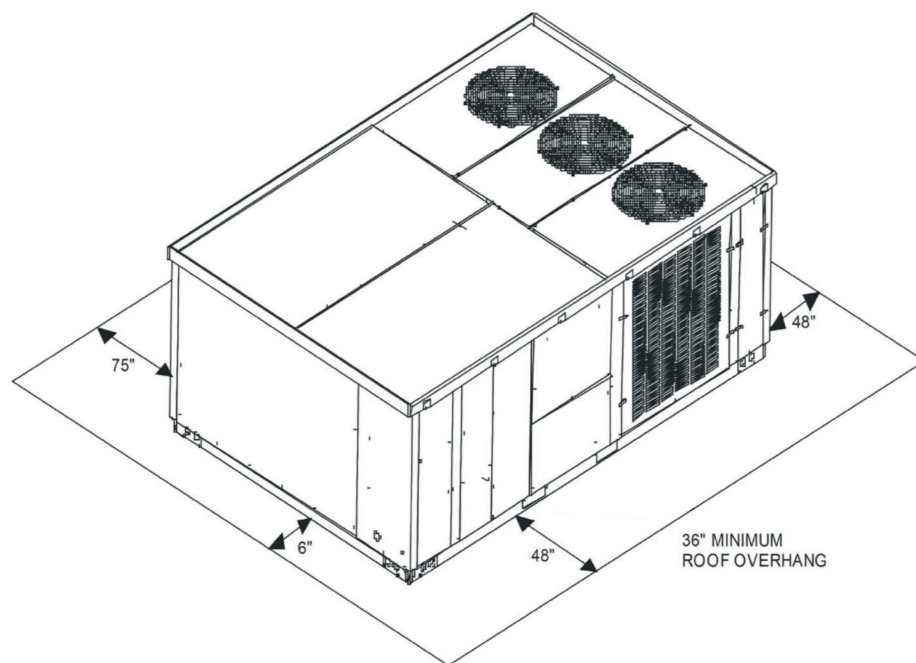

Unit Location

The structural engineer must verify that the roof has adequate support and ability to minimize deflection. Take extreme caution when using on a wooden roof structure. Unit condenser coils should be in a location that avoids any heated exhaust air.



Allow sufficient space around the unit for maintenance/service clearance. Consult your Daikin sales representative if available clearances do not meet minimum recommendations.

Where code considerations, such as the NEC, require extended clearances, these take precedence.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- » Unit must be lifted by the four lifting holes located at the base frame corners.
- » Lifting cables should be attached to the unit with shackles.
- » The distance between the crane hook and the top of the unit must not be less than 60".
- » Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base frame before setting unit on roof curb. These struts are intended to protect unit base frame from forklift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

Important: If using bottom discharge with roof curb, duct-work should be attached to the curb prior to installing the unit. Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual. Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end. Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct. For further and more detailed information please refer to our Daikin Light Commercial Packaged unit IOD.

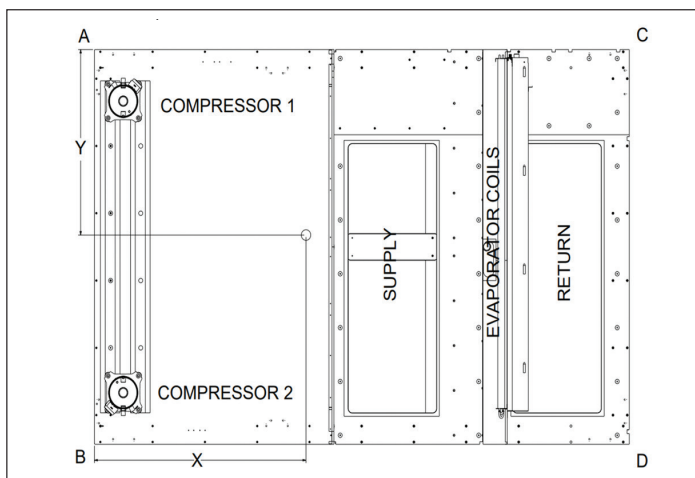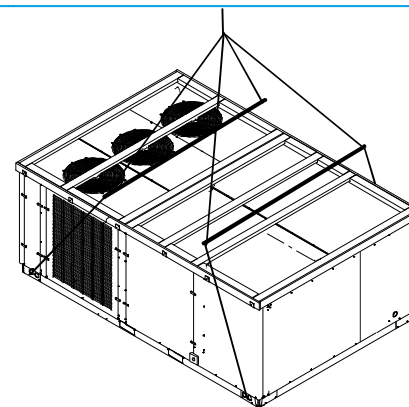

Roof Curb Installation

The roof curb is field-assembled and must be installed level (within 1/16" per foot side to side). A sub-base must be constructed by the contractor in applications involving pitched roofs. Gaskets are furnished and must be installed between the unit and curb. For proper installation, follow NRCA guidelines. In applications requiring post and rail installation, an I-beam securely mounted on multiple posts should support the unit on each side. In addition, the insulation on the underside of the unit should be protected from the elements. Applications in geographic areas subjected to seismic or hurricane conditions must meet code requirements for fastening the unit to the curb and the curb to the building structure.

Weights

MODEL	SHIPPING WEIGHT (LBS)	%OPERATING WEIGHT (LBS)	CORNER WEIGHTS (LBS)				LENGTH	WIDTH
			A	B	C	D	X (in)	Y (in)
DSH1803D000001S	2388	2273	740	518	440	575	59.5	46.1
DSH1804D000001S	2388	2273	740	518	440	575	59.5	46.1
DSH1807D000001S	2388	2273	740	518	440	575	59.5	46.1
DSH2403D000001S	2469	2354	508	839	607	475	59.6	40.6
DSH2404D000001S	2469	2354	508	839	607	475	59.6	40.6
DSH2407D000001S	2469	2354	508	839	607	475	59.6	40.6

For details on accessories refer to document **PM-LC-ACCESSORIES**

Notes

Notes