
Markel Products Company

MADE IN THE U.S.A.

3320 SERIES
FAN FORCED WALL HEATER

MARKEL

CUSTOMER		**DATE:**	
PROJECT			
LOCATION			
ARCHITECT			
ENGINEER			
CONTRACTOR			
SUBMITTED BY			
APPROVED BY			
APPROVED BY			

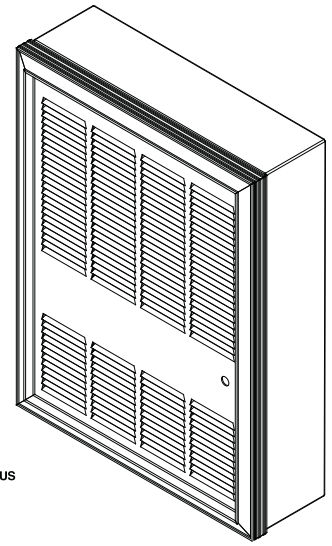


Intertek

SUBMITTAL DATA SHEET


QTY	MODEL	TAG	WATTAGE	VOLTS	PHASE	AMPS	CFM	THERMOSTAT	OPTIONS

NOTES/SPECIAL INSTRUCTIONS:	


PRINT FORM **EMAIL FORM** **CLEAR FORM**

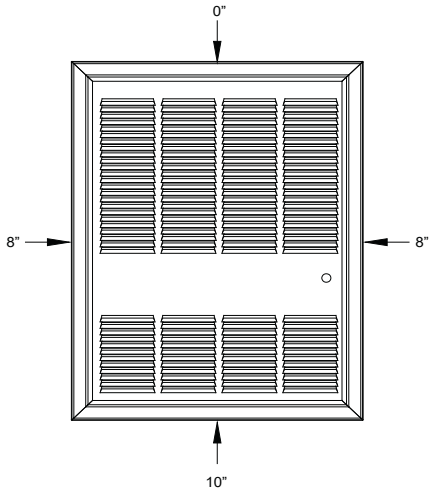

CLEARANCE

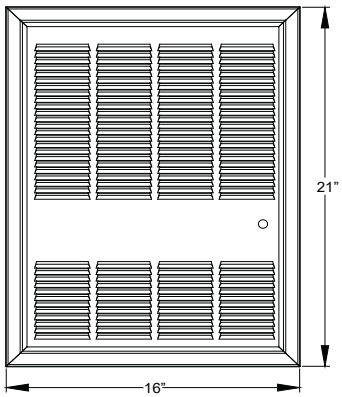


GRILLE

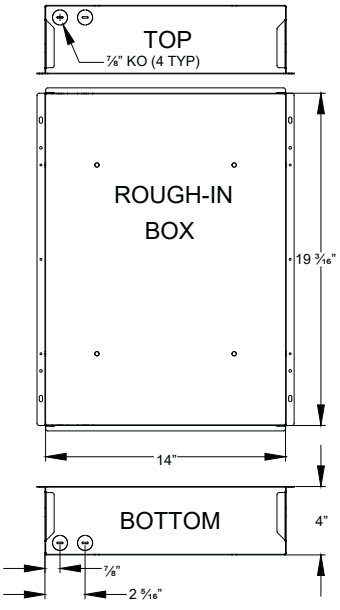

Rough in dimensions
14 ⅛"W x 19 ½"H

Features:

- Heavy duty 18-gauge steel construction (16-gauge grille optional) with aluminum front frame
- Powder coated paint finish
- Steel block fin element
- All units equipped with automatic over-heat limit protection
- Vane axial fan blade produces 175 CFM or 600 RPM
- Dual wattage and voltage units available for 208/240 volts
- Surface Mounting Frame (shown) available for non-recessed applications
- Factory installed Tamper-Proof Thermostats, Fan Delay, and Disconnect included
- Rough-in dimensions: 14 ⅛" Wide x 19 1⁄2" High x 4" Deep
- Grill dimensions: 15 ²⁹⁄₃₂" Wide x 20 ²⁷⁄₃₂" High

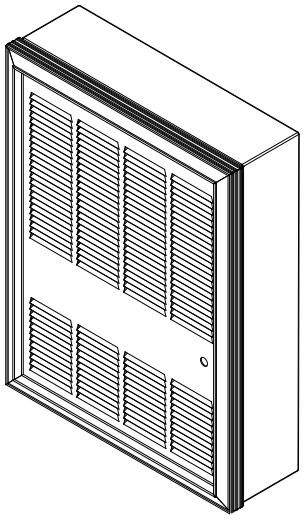

Intertek

IN-BUILT SINGLE POLE TAMPERPROOF THERMOSTAT (0º - 110º TEMPERATURE RANGE) FOR DOUBLE POLE THERMOSTAT REPLACE "T" IN MODEL NUMBER WITH "T2" -- Add $50						
MFG CATALOG NUMBER	**MFG MODEL NUMBER**	**WATTS**	**BTUs**	**VOLTS**	**AMPS**	**WT. (LBS)**
SINGLE PHASE MODELS						
03820502	E3321TD-RP	750	2560	120	6.25	26
03819902	E3322TD-RP	1000	3413		8.3	
03808802	E3323TD-RP	1500	5120		12.5	
03809302	F3326TD-RP	4000	13800	208	19.2	
03810202	F3327TD-RP	4800	16560		23	
03809402	HF3323TD-RP	1500 / 1125	5120 / 3840	240 / 208	6.2 / 5.4	
03809502	HF3324TD-RP	2000 / 1500	6284 / 5120		8.3 / 7.2	27
03809602	HF3325TD-RP	3000 / 2250	10350 / 7763		12.5 /10.8	29
03809702	HF3326TD-RP	4000 / 3000	13800 / 10350		16.7/14.4	
03810302	H3327TD-RP	4800	16560	240	20	
03809802	G3323TD-RP	1500	5120	277	4.1	26
03809902	G3324TD-RP	2000	6284		7.2	27
03810002	G3325TD-RP	3000	10350		10.8	29
03810102	G3326TD-RP	4000	13800		14.4	
03810402	G3327TD-RP	4800	16560		17.3	
3-PHASE MODELS						
04763602	J3325TD-RP	3000	10239	208	8.3	30
04763702	K3325TD-RP		10239	240	7.2	
04763802	P3325T-RP		10239	480	3.6	
03980702	J3326TD-RP	4000	13649	208	11.11	
03980902	K3326TD-RP		13649	240	9.64	
04763902	P3326T-RP		13652	480	4.8	
03980802	J3327TD-RP	4800	16378	208	13.33	
03981002	K3327TD-RP		16378	240	11.57	
04764002	P3327T-RP		16382	480	5.8	

*Disconnect switch not available on 480V units

Accessories

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	TYPE	WT. (LBS)
03778502	BOX 3310	Additional Rough-in Box	Field Installed	3
03784502	3320EX33	4" Surface Mounting Frame		1
03829302	3320EX16	2" semi recess extender		1
-----	Suffix - HD	16 Gauge Steel Heavy Duty Grill	Factory Installed	2

Product Specifications:

"Furnish and install Heavy-Duty Forced Air wall heaters, where specified. The heaters shall be constructed of a heavy 18 gauge steel housing with an extruded Aluminum frame. The rough-in dimensions are 14 ⅛" Wide x 19 ½" High x 4" Deep. The units shall be available in ratings from 750 to 4800 Watts at 240, 208, and 277 Volts. The heaters shall have a low-speed 600 RPM, 4-pole motor which drives a vane axial blower to deliver a quiet 175 CFM of down flow air. The heating element shall be of the sealed tubular type with large, parallel steel fins for quick heat transfer. Unit shall have as a standard, a thermal overload cut-off for added safety, fan delay switch and builtin tamper proof thermostat which shall be calibrated to provide a range of 0°F. to 110°F. and manual disconnect switch. Optional accessories shall include a surface and semi-recess mounting adapter. All heaters shall be listed by ETL. The heating element shall be supplied with a manufacturers 1-year limited warranty.