

90

HEAVY DUTY RETURN GYM GRILLE




90

Heavy Duty Return Gym Grille


The 90 Series Heavy Duty Return Gym Grille features a fully welded border and mandrel tubes that support the blades to prevent damage, making them ideal for heavy duty applications. Available in both steel and aluminum construction with multiple core styles and mounting options, the 90 Series can be customized to suit each application.

*Fully welded, heavy duty construction
is ideal for demanding applications*

*Mandrel tubes support blades to
prevent damage to the grille*

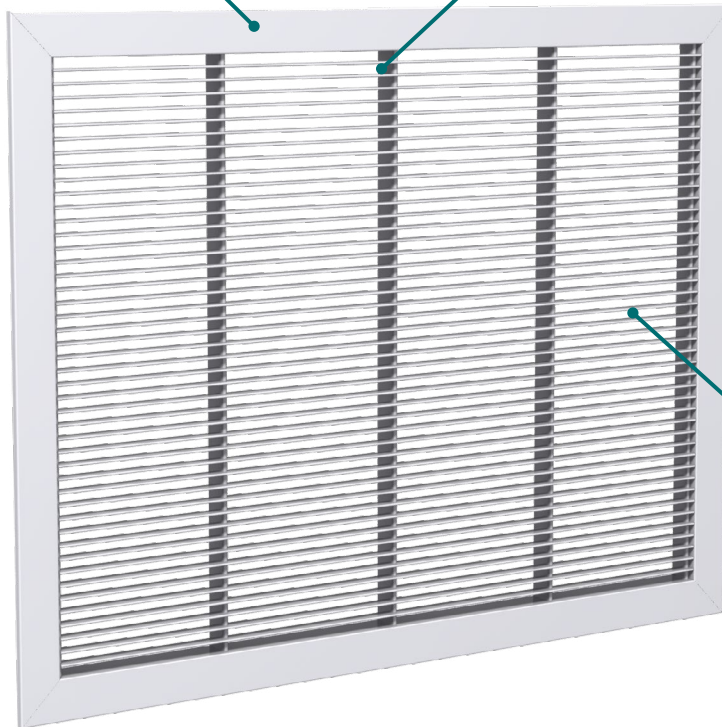

*Multiple blade spacing
and deflection options*

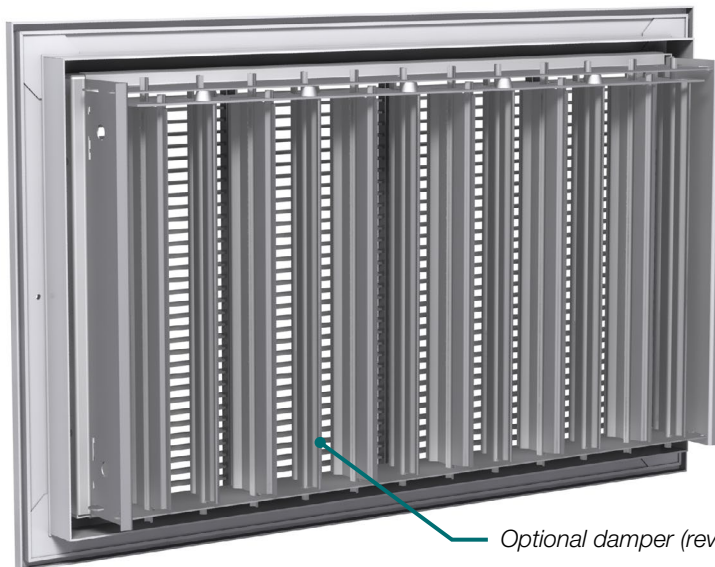

Optional damper (reverse)

AESTHETIC AND PERFORMANCE OPTIONS

- + Many performance and aesthetic options, including a unique 30° blade deflection, allow the 90 Series to be customized to provide the ideal combination of airflow and sight resistance for each application.
- + Finish options, including anodized for aluminum grilles, and large single piece aluminum construction, up to 48 in. x 96 in., ensure aesthetic needs are met.

FILTER FRAME

- + The filter frame option is intended to be incorporated into a conveniently serviceable return air filtration system and is designed for ceiling or wall mounting in recirculating air systems.
- + The filter frame option can be selected to accept standard 1 in. or 2 in. filter media and is available in two styles that allow access to the filter for cleaning including:
 - ¼ turn quick release fasteners that allow complete removal of the grille
 - A combination of ¼ turn fasteners and a piano hinge that allows hinging of the grille



*Optional filter
frame (reverse)*

TYPICAL APPLICATIONS

The 90 Series is specifically designed for applications such as gymnasiums, factories, warehouses, heavy traffic corridors and any general public area where durability is essential.

CONSTRUCTION

- + Models
 - 90 - Steel, 3/8 in. spacing, 0° deflection
 - 91 - Steel, 3/8 in. spacing, 45° deflection
 - 93 - Steel, 1/2 in. spacing, 45° deflection
 - 95 - Steel, 3/4 in. spacing, 0° deflection
 - 96 - Steel, 3/4 in. spacing, 45° deflection
 - 97 - Extruded aluminum, 1/2 in. spacing, 0° deflection
 - 98 - Extruded aluminum, 1/2 in. spacing, 45° deflection
 - 99 - Extruded aluminum, 1/2 in. spacing, 30° deflection
- + Available Sizes
 - Maximum (one piece, aluminum): 48 in. x 96 in.
 - Maximum (one piece, steel): 48 in. x 48 in.
- + Options
 - Mounting Frame
 - Steel opposed blade damper (VCS3)
 - Heavy duty steel opposed blade damper (VCS5)
 - Aluminum opposed blade damper (VCS3AL)
 - Filter frame (90FH/91FH/95FH/96FH)

PERFORMANCE DATA

90 / 90FH — 3/8 in. blade spacing, 0° deflection steel

Core Area (sq. ft.)	Nominal Size		Core Velocity (fpm) Velocity Pressure (in. w.g.) Neg Static Pressure (in. w.g.)	NC 20				NC 30			NC 40			NC 50
				400	500	600	700	800	900	1000	1100	1200	1400	
				0.010	0.016	0.022	0.031	0.040	0.050	0.062	0.075	0.090	0.122	
				0.024	0.038	0.052	0.074	0.095	0.119	0.147	0.178	0.213	0.289	
0.15	7 x 4		Flow Rate (cfm)	60	75	90	105	120	135	150	165	180	210	
	6 x 5		Sound (NC)	-	-	20	25	29	33	37	40	43	48	
0.18	8 x 4	6 x 6	Flow Rate (cfm)	72	90	108	126	144	162	180	198	216	252	
	7 x 5		Sound (NC)	-	-	20	25	29	33	37	40	43	48	
0.22	10 x 4	7 x 6	Flow Rate (cfm)	88	110	132	154	176	198	220	242	264	308	
	8 x 5		Sound (NC)	-	15	21	26	30	34	38	41	44	49	
0.26	12 x 4	8 x 6	Flow Rate (cfm)	104	130	156	182	208	234	260	286	312	364	
	10 x 5		Sound (NC)	-	15	21	26	31	35	38	41	44	50	
0.30	14 x 4		Flow Rate (cfm)	120	150	180	210	240	270	300	330	360	420	
			Sound (NC)	-	15	21	27	31	35	39	42	45	50	
0.34	16 x 4	10 x 6	Flow Rate (cfm)	136	170	204	238	272	306	340	374	408	476	
	12 x 5		Sound (NC)	-	15	22	27	31	35	39	42	45	50	
0.39	18 x 4	12 x 6	Flow Rate (cfm)	156	195	234	273	312	351	390	429	468	546	
	14 x 5	8 x 8	Sound (NC)	-	16	22	27	31	35	39	42	45	50	
0.46	20 x 4	14 x 6	Flow Rate (cfm)	184	230	276	322	368	414	460	506	552	644	
	16 x 5	10 x 8	Sound (NC)	-	17	23	28	32	36	40	43	46	51	
0.52	24 x 4	16 x 6	Flow Rate (cfm)	208	260	312	364	416	468	520	572	624	728	
	18 x 5		Sound (NC)	-	17	23	28	32	36	40	43	46	51	
0.60	28 x 4	18 x 6	Flow Rate (cfm)	240	300	360	420	480	540	600	660	720	840	
	20 x 5	12 x 8	Sound (NC)	-	18	24	29	33	37	41	44	47	52	
0.69	30 x 4	20 x 6	Flow Rate (cfm)	276	345	414	483	552	621	690	759	828	966	
	24 x 5	14 x 8	Sound (NC)	-	18	24	29	33	37	41	44	47	52	
0.81	36 x 4	22 x 6	Flow Rate (cfm)	324	405	486	567	648	729	810	891	972	1134	
	28 x 5	16 x 8	Sound (NC)	-	18	24	29	33	37	41	44	47	52	
0.90	40 x 4	26 x 6	Flow Rate (cfm)	360	450	540	630	720	810	900	990	1080	1260	
	30 x 5	18 x 8	Sound (NC)	-	19	25	30	34	38	42	45	48	53	
1.07	48 x 4	30 x 6	Flow Rate (cfm)	428	535	642	749	856	963	1070	1177	1284	1498	
	36 x 5	18 x 10	Sound (NC)	-	19	25	30	34	38	42	45	48	53	
1.18	34 x 6	20 x 10	Flow Rate (cfm)	472	590	708	826	944	1062	1180	1298	1416	1652	
	24 x 8	16 x 12	Sound (NC)	-	19	25	30	34	38	42	45	48	53	
1.34	60 x 4	36 x 6	Flow Rate (cfm)	536	670	804	938	1072	1206	1340	1474	1608	1876	
	48 x 5	18 x 12	Sound (NC)	-	20	26	31	35	39	43	46	49	54	
1.60	72 x 4	24 x 10	Flow Rate (cfm)	640	800	960	1120	1280	1440	1600	1760	1920	2240	
	30 x 8	22 x 12	Sound (NC)	-	20	26	31	35	39	43	46	49	54	
1.80	60 x 5	36 x 8	Flow Rate (cfm)	720	900	1080	1260	1440	1620	1800	1980	2160	2520	
	48 x 6	30 x 10	Sound (NC)	-	21	27	32	36	40	44	47	50	55	
2.08	72 x 5	40 x 8	Flow Rate (cfm)	832	1040	1248	1456	1664	1872	2080	2288	2496	2912	
	60 x 6	36 x 10	Sound (NC)	-	21	27	32	36	40	44	47	50	55	
2.45	72 x 6	32 x 12	Flow Rate (cfm)	980	1225	1470	1715	1960	2205	2450	2695	2940	3430	
	48 x 8	26 x 14	Sound (NC)	-	22	28	33	37	41	45	48	51	56	
2.78	36 x 12	26 x 16	Flow Rate (cfm)	1112	1390	1668	1946	2224	2502	2780	3058	3336	3892	
	30 x 14	24 x 18	Sound (NC)	-	22	28	33	37	41	45	48	51	56	
3.11	60 x 8	40 x 12	Flow Rate (cfm)	1244	1555	1866	2177	2488	2799	3110	3421	3732	4354	
	48 x 10	36 x 14	Sound (NC) NC	-	22	28	33	37	41	45	48	51	56	
3.61	72 x 8	48 x 12	Flow Rate (cfm)	1444	1805	2166	2527	2888	3249	3610	3971	4332	5054	
	60 x 10	36 x 16	Sound (NC)	15	23	29	34	38	42	46	49	52	57	
4.29	48 x 14	32 x 20	Flow Rate (cfm)	1716	2145	2574	3003	3432	3861	4290	4719	5148	6006	
	36 x 18	28 x 24	Sound (NC)	15	23	29	34	38	42	46	49	52	57	
4.65	72 x 10	36 x 20	Flow Rate (cfm)	1860	2325	2790	3255	3720	4185	4650	5115	5580	6510	
	48 x 16	30 x 24	Sound (NC)	15	23	29	34	38	42	46	49	52	57	
5.58	72 x 12	48 x 18	Flow Rate (cfm)	2232	2790	3348	3906	4464	5022	5580	6138	6696	7812	
	60 x 14	36 x 24	Sound (NC)	16	24	30	35	39	43	47	50	53	58	
6.25	72 x 14	48 x 20	Flow Rate (cfm)	2500	3125	3750	4375	5000	5625	6250	6875	7500	8750	
	60 x 16	30 x 30	Sound (NC)	16	24	30	35	39	43	47	50	53	58	
				NC 20		NC 30		NC 40		NC 50				

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.83.
— Subtract 4 from listed NC.

PERFORMANCE DATA

91 / 91FH — 3/8 in. blade spacing, 45° deflection steel

Core Area (sq. ft.)	Nominal Size		Core Velocity (fpm)	NC 20				NC 30			NC 40			
				200	250	300	350	400	500	600	700	800	900	
				Velocity Pressure (in. w.g.)	0.002	0.004	0.006	0.008	0.010	0.016	0.022	0.030	0.040	0.050
				Neg Static Pressure (in. w.g.)	0.017	0.026	0.038	0.051	0.067	0.104	0.150	0.205	0.267	0.338
0.15	7 x 4		Flow Rate (cfm)	30	37	45	52	60	75	90	105	120	135	
	6 x 5		Sound (NC)	-	17	21	25	28	33	37	41	44	47	
0.18	8 x 4	6 x 6	Flow Rate (cfm)	36	45	54	63	72	90	108	126	144	162	
	7 x 5		Sound (NC)	-	18	22	26	29	34	38	42	45	48	
0.22	10 x 4	7 x 6	Flow Rate (cfm)	44	55	66	77	88	110	132	154	176	198	
	8 x 5		Sound (NC)	-	18	22	26	29	34	38	42	45	48	
0.26	12 x 4	8 x 6	Flow Rate (cfm)	50	65	78	91	104	130	156	182	208	234	
	10 x 5		Sound (NC)	-	19	23	27	30	35	39	43	46	49	
0.30	14 x 4		Flow Rate (cfm)	60	75	90	105	120	150	180	210	240	270	
			Sound (NC)	-	19	23	27	30	35	39	43	46	49	
0.34	16 x 4	10 x 6	Flow Rate (cfm)	68	85	102	119	136	170	204	238	272	306	
	12 x 5		Sound (NC)	-	19	23	27	30	35	39	43	46	49	
0.39	18 x 4	12 x 6	Flow Rate (cfm)	78	98	117	137	156	195	234	273	312	351	
	14 x 5	8 x 8	Sound (NC)	15	20	24	28	31	36	40	44	47	50	
0.46	20 x 4	14 x 6	Flow Rate (cfm)	92	115	138	161	184	230	276	322	368	414	
	16 x 5	10 x 8	Sound (NC)	15	20	24	28	31	36	40	44	47	50	
0.52	24 x 4	16 x 6	Flow Rate (cfm)	104	130	156	182	208	260	312	364	416	468	
	18 x 5		Sound (NC)	15	20	24	28	31	36	40	44	47	50	
0.60	28 x 4	18 x 6	10 x 10	Flow Rate (cfm)	120	150	180	210	240	300	360	420	480	540
	20 x 5	12 x 8		Sound (NC)	16	21	25	29	32	37	41	45	48	51
0.69	30 x 4	20 x 6	12 x 10	Flow Rate (cfm)	138	173	207	242	276	345	414	483	552	621
	24 x 5	14 x 8		Sound (NC)	16	21	25	29	32	37	41	45	48	51
0.81	36 x 4	22 x 6	14 x 10	Flow Rate (cfm)	162	202	242	283	324	405	486	567	648	729
	28 x 5	16 x 8		Sound (NC)	16	21	25	29	32	37	41	45	48	51
0.90	40 x 4	26 x 6	16 x 10	Flow Rate (cfm)	180	225	270	315	360	450	540	630	720	810
	30 x 5	18 x 8	12 x 12	Sound (NC)	17	22	26	30	33	38	42	46	49	52
1.07	48 x 4	30 x 6	14 x 12	Flow Rate (cfm)	214	267	321	374	428	535	642	749	856	963
	36 x 5	18 x 10		Sound (NC)	17	22	26	30	33	38	42	46	49	52
1.18	34 x 6	20 x 10	14 x 14	Flow Rate (cfm)	236	295	354	413	472	590	708	826	944	1062
	24 x 8	16 x 12		Sound (NC)	17	22	26	30	33	38	42	46	49	52
1.34	60 x 4	36 x 6	16 x 14	Flow Rate (cfm)	268	335	402	469	536	670	804	938	1072	1206
	48 x 5	18 x 12		Sound (NC)	18	23	27	31	34	39	43	47	50	53
1.60	72 x 4	24 x 10	18 x 14	Flow Rate (cfm)	320	400	480	560	640	800	960	1120	1280	1440
	30 x 8	22 x 12	16 x 16	Sound (NC)	18	23	27	31	34	39	43	47	50	53
1.80	60 x 5	36 x 8	24 x 12	18 x 16	Flow Rate (cfm)	360	450	540	630	720	900	1080	1260	1440
	48 x 6	30 x 10	20 x 14		Sound (NC)	18	23	27	31	34	39	43	47	50
2.08	72 x 5	40 x 8	30 x 12	20 x 16	Flow Rate (cfm)	416	520	624	728	832	1040	1248	1456	1664
	60 x 6	36 x 10	24 x 14	18 x 18	Sound (NC)	19	24	28	32	35	40	44	48	51
2.45	72 x 6	32 x 12	24 x 16		Flow Rate (cfm)	490	612	735	857	980	1225	1470	1715	1960
	48 x 8	26 x 14	20 x 18		Sound (NC)	19	24	28	32	35	40	44	48	51
2.78	36 x 12	26 x 16	22 x 20		Flow Rate (cfm)	556	695	834	973	1112	1390	1668	1946	2224
	30 x 14	24 x 18			Sound (NC)	20	25	29	33	36	41	45	49	52
3.11	60 x 8	40 x 12	30 x 16	24 x 20	Flow Rate (cfm)	622	777	933	1088	1244	1555	1866	2177	2488
	48 x 10	36 x 14	26 x 18		Sound (NC) NC	20	25	29	33	36	41	45	49	52
3.61	72 x 8	48 x 12	30 x 18		Flow Rate (cfm)	722	902	1083	1263	1444	1805	2166	2527	2888
	60 x 10	36 x 16	24 x 24		Sound (NC)	20	25	29	33	36	41	45	49	52
4.29	48 x 14	32 x 20			Flow Rate (cfm)	858	1072	1287	1501	1716	2145	2574	3003	3432
	36 x 18	28 x 24			Sound (NC)	21	26	30	34	37	42	46	50	53
4.65	72 x 10	36 x 20			Flow Rate (cfm)	930	1162	1395	1627	1860	2325	2790	3255	3720
	48 x 16	30 x 24			Sound (NC)	21	26	30	34	37	42	46	50	53
5.58	72 x 12	48 x 18			Flow Rate (cfm)	1116	1395	1674	1953	2232	2790	3348	3906	4464
	60 x 14	36 x 24			Sound (NC)	21	26	30	34	37	42	46	50	53
6.25	72 x 14	48 x 20			Flow Rate (cfm)	1250	1562	1875	2187	2500	3125	3750	4375	5000
	60 x 16	30 x 30			Sound (NC)	22	27	31	35	38	43	47	51	54
				NC 20	NC 30		NC 40			NC 50				

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.93.
— Subtract 2 from listed NC.

PERFORMANCE DATA

93 — 1/2 in. blade spacing, 45° deflection steel

Core Area (sq. ft.)	Nominal Size	NC 20										
		Core Velocity (fpm)	200	250	300	350	400	500	600	700	800	900
		Velocity Pressure (in. w.g.)	0.002	0.004	0.006	0.008	0.010	0.016	0.022	0.030	0.040	0.050
		Neg Static Pressure (in. w.g.)	0.011	0.017	0.024	0.033	0.043	0.067	0.096	0.131	0.171	0.216
0.15	7 x 4 6 x 5	Flow Rate (cfm)	30	38	45	53	60	75	90	105	120	135
		Sound (NC)	-	-	-	-	-	-	-	17	21	24
0.18	8 x 4 6 x 6 7 x 5	Flow Rate (cfm)	36	45	54	63	72	90	108	126	144	162
		Sound (NC)	-	-	-	-	-	-	-	18	22	25
0.22	10 x 4 7 x 6 8 x 5	Flow Rate (cfm)	44	55	66	77	88	110	132	154	176	198
		Sound (NC)	-	-	-	-	-	-	-	19	23	26
0.26	12 x 4 8 x 6 10 x 5	Flow Rate (cfm)	52	65	78	91	104	130	156	182	208	234
		Sound (NC)	-	-	-	-	-	-	16	20	24	27
0.30	14 x 4	Flow Rate (cfm)	60	75	90	105	120	150	180	210	240	270
		Sound (NC)	-	-	-	-	-	-	17	21	25	28
0.34	16 x 4 10 x 6 12 x 5	Flow Rate (cfm)	68	85	102	119	136	170	204	238	272	306
		Sound (NC)	-	-	-	-	-	-	17	22	25	29
0.39	18 x 4 12 x 6 14 x 5 8 x 8	Flow Rate (cfm)	78	98	117	137	156	195	234	273	312	351
		Sound (NC)	-	-	-	-	-	-	18	22	26	30
0.46	20 x 4 14 x 6 16 x 5 10 x 8	Flow Rate (cfm)	80	100	120	140	160	200	240	280	320	360
		Sound (NC)	-	-	-	-	-	-	18	23	26	30
0.52	24 x 4 16 x 6 18 x 5	Flow Rate (cfm)	104	130	156	182	208	260	312	364	416	468
		Sound (NC)	-	-	-	-	-	-	20	24	28	31
0.60	28 x 4 18 x 6 10 x 10 20 x 5 12 x 8	Flow Rate (cfm)	120	150	180	210	240	300	360	420	480	540
		Sound (NC)	-	-	-	-	-	15	20	25	29	32
0.69	30 x 4 20 x 6 12 x 10 24 x 5 14 x 8	Flow Rate (cfm)	138	173	207	242	276	345	414	483	552	621
		Sound (NC)	-	-	-	-	-	16	21	26	29	33
0.81	36 x 4 22 x 6 14 x 10 28 x 5 16 x 8	Flow Rate (cfm)	162	203	243	284	324	405	486	567	648	729
		Sound (NC)	-	-	-	-	-	17	22	27	30	34
0.90	40 x 4 26 x 6 16 x 10 30 x 5 18 x 8 12 x 12	Flow Rate (cfm)	180	225	270	315	360	450	540	630	720	810
		Sound (NC)	-	-	-	-	-	18	23	27	31	34
1.07	48 x 4 30 x 6 14 x 12 36 x 5 18 x 10	Flow Rate (cfm)	214	268	321	375	428	535	642	749	856	963
		Sound (NC)	-	-	-	-	-	19	24	28	32	35
1.18	34 x 6 20 x 10 14 x 14 24 x 8 16 x 12	Flow Rate (cfm)	236	295	354	413	472	590	708	826	944	1062
		Sound (NC)	-	-	-	-	-	19	24	29	33	36
1.34	60 x 4 36 x 6 16 x 14 48 x 5 18 x 12	Flow Rate (cfm)	268	335	402	469	536	670	804	938	1072	1206
		Sound (NC)	-	-	-	-	-	20	25	29	33	37
1.60	72 x 4 24 x 10 18 x 14 30 x 8 22 x 12 16 x 16	Flow Rate (cfm)	320	400	480	560	640	800	960	1120	1280	1440
		Sound (NC)	-	-	-	-	-	21	26	30	34	38
1.80	60 x 5 36 x 8 24 x 12 18 x 16 48 x 6 30 x 10 20 x 14	Flow Rate (cfm)	360	450	540	630	720	900	1080	1260	1440	1620
		Sound (NC)	-	-	-	-	15	22	27	31	35	38
2.08	72 x 5 40 x 8 30 x 12 20 x 16 60 x 6 36 x 10 24 x 14 18 x 18	Flow Rate (cfm)	416	520	624	728	832	1040	1248	1456	1664	1872
		Sound (NC)	-	-	-	-	16	22	28	32	36	39
2.45	72 x 6 32 x 12 24 x 16 48 x 8 26 x 14 20 x 18	Flow Rate (cfm)	490	613	735	858	980	1225	1470	1715	1960	2205
		Sound (NC)	-	-	-	-	17	23	29	33	37	40
2.78	36 x 12 26 x 16 22 x 20 30 x 14 24 x 18	Flow Rate (cfm)	556	695	834	973	1112	1390	1668	1946	2224	2502
		Sound (NC)	-	-	-	-	18	24	29	34	37	41
3.11	60 x 8 40 x 12 30 x 16 24 x 20 48 x 10 36 x 14 26 x 18	Flow Rate (cfm)	622	778	933	1089	1244	1555	1866	2177	2488	2799
		Sound (NC) NC	-	-	-	-	18	25	30	34	38	41
3.61	72 x 8 48 x 12 30 x 18 60 x 10 36 x 16 24 x 24	Flow Rate (cfm)	722	903	1083	1264	1444	1805	2166	2527	2888	3249
		Sound (NC)	-	-	-	15	19	26	31	35	39	42
4.29	48 x 14 32 x 20 36 x 18 28 x 24	Flow Rate (cfm)	858	1073	1287	1502	1716	2145	2574	3003	3432	3861
		Sound (NC)	-	-	-	16	20	27	32	36	40	43
4.65	72 x 10 36 x 20 48 x 16 30 x 24	Flow Rate (cfm)	930	1163	1395	1628	1860	2325	2790	3255	3720	4185
		Sound (NC)	-	-	-	17	21	27	32	37	40	44
5.58	72 x 12 48 x 18 60 x 14 36 x 24	Flow Rate (cfm)	1116	1395	1674	1953	2232	2790	3348	3906	4464	5022
		Sound (NC)	-	-	-	18	22	28	33	38	41	45
6.25	72 x 14 48 x 20 60 x 16 30 x 30	Flow Rate (cfm)	1250	1563	1875	2188	2500	3125	3750	4375	5000	5625
		Sound (NC)	-	-	-	18	22	29	34	38	42	45

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.93.
— Subtract 2 from listed NC.

PERFORMANCE DATA

95 / 95FH — 3/4 in. blade spacing, 0° deflection steel

Core Area (sq. ft.)	Nominal Size		Core Velocity (fpm)	NC 20					NC 30			NC 40			
				400	500	600	700	800	900	1000	1100	1200	1400		
				Velocity Pressure (in. w.g.)	0.010	0.016	0.022	0.031	0.040	0.051	0.062	0.075	0.090	0.122	
				Neg Static Pressure (in. w.g.)	0.018	0.029	0.041	0.056	0.073	0.092	0.114	0.138	0.164	0.224	
0.15	7 x 4		Flow Rate (cfm)	60	75	90	105	120	135	150	165	180	210		
	6 x 5		Sound (NC)	-	-	-	18	23	27	30	34	37	42		
0.18	8 x 4	6 x 6	Flow Rate (cfm)	72	90	108	126	144	162	180	198	216	252		
	7 x 5		Sound (NC)	-	-	-	19	23	27	31	34	37	43		
0.22	10 x 4	7 x 6	Flow Rate (cfm)	88	110	132	154	176	198	220	242	264	308		
	8 x 5		Sound (NC)	-	-	-	19	24	28	31	35	38	43		
0.26	12 x 4	8 x 6	Flow Rate (cfm)	104	130	156	182	208	234	260	286	312	364		
	10 x 5		Sound (NC)	-	-	-	19	24	28	32	35	38	44		
0.30	14 x 4		Flow Rate (cfm)	120	150	180	210	240	270	300	330	360	420		
			Sound (NC)	-	-	15	20	25	29	32	36	39	44		
0.34	16 x 4	10 x 6	Flow Rate (cfm)	136	170	204	238	272	306	340	374	408	476		
	12 x 5		Sound (NC)	-	-	15	20	25	29	33	36	39	44		
0.39	18 x 4	12 x 6	Flow Rate (cfm)	156	195	234	273	312	351	390	429	468	546		
	14 x 5	8 x 8	Sound (NC)	-	-	15	21	25	29	33	36	39	45		
0.46	20 x 4	14 x 6	Flow Rate (cfm)	184	230	276	322	368	414	460	506	552	644		
	16 x 5	10 x 8	Sound (NC)	-	-	16	21	26	30	33	37	40	45		
0.52	24 x 4	16 x 6	Flow Rate (cfm)	208	260	312	364	416	468	520	572	624	728		
	18 x 5		Sound (NC)	-	-	16	21	26	30	34	37	40	45		
0.60	28 x 4	18 x 6	10 x 10	Flow Rate (cfm)	240	300	360	420	480	540	600	660	720	840	
	20 x 5	12 x 8		Sound (NC)	-	-	16	22	26	30	34	37	40	46	
0.69	30 x 4	20 x 6	12 x 10	Flow Rate (cfm)	276	345	414	483	552	621	690	759	828	966	
	24 x 5	14 x 8		Sound (NC)	-	-	17	22	27	31	34	38	41	46	
0.81	36 x 4	24 x 6	14 x 10	Flow Rate (cfm)	324	405	486	567	648	729	810	891	972	1134	
	28 x 5	16 x 8		Sound (NC)	-	-	17	22	27	31	35	38	41	47	
0.90	40 x 4	26 x 6	16 x 10	Flow Rate (cfm)	360	450	540	630	720	810	900	990	1080	1260	
	30 x 5	18 x 8	12 x 12	Sound (NC)	-	-	17	23	27	31	35	38	41	47	
1.07	48 x 4	30 x 6	14 x 12	Flow Rate (cfm)	428	535	642	749	856	963	1070	1177	1284	1498	
	36 x 5	18 x 10		Sound (NC)	-	-	18	23	28	32	36	39	42	47	
1.18	34 x 6	20 x 10	14 x 14	Flow Rate (cfm)	472	590	708	826	944	1062	1180	1298	1416	1652	
	24 x 8	16 x 12		Sound (NC)	-	-	18	23	28	32	36	39	42	48	
1.34	60 x 4	36 x 6	16 x 14	Flow Rate (cfm)	536	670	804	938	1072	1206	1340	1474	1608	1876	
	48 x 5	18 x 12		Sound (NC)	-	-	18	24	28	33	36	39	42	48	
1.60	72 x 4	24 x 10	18 x 14	Flow Rate (cfm)	640	800	960	1120	1280	1440	1600	1760	1920	2240	
	30 x 8	22 x 12	16 x 16	Sound (NC)	-	-	19	24	29	33	37	40	43	48	
1.80	60 x 5	36 x 8	24 x 12	18 x 16	Flow Rate (cfm)	720	900	1080	1260	1440	1620	1800	1980	2160	2520
	48 x 6	30 x 10	20 x 14		Sound (NC)	-	-	19	25	29	33	37	40	43	49
2.08	72 x 5	40 x 8	30 x 12	20 x 16	Flow Rate (cfm)	832	1040	1248	1456	1664	1872	2080	2288	2496	2912
	60 x 6	36 x 10	24 x 14	18 x 18	Sound (NC)	-	-	20	25	30	34	37	41	44	49
2.45	72 x 6	32 x 12	24 x 16		Flow Rate (cfm)	980	1225	1470	1715	1960	2205	2450	2695	2940	3430
	48 x 8	26 x 14	20 x 18		Sound (NC)	-	-	20	25	30	34	38	41	44	49
2.78	36 x 12	26 x 16	22 x 20		Flow Rate (cfm)	1112	1390	1668	1946	2224	2502	2780	3058	3336	3892
	30 x 14	24 x 18			Sound (NC)	-	-	20	26	30	34	38	41	44	50
3.11	60 x 8	40 x 12	30 x 16	24 x 20	Flow Rate (cfm)	1244	1555	1866	2177	2488	2799	3110	3421	3732	4354
	48 x 10	36 x 14	26 x 18		Sound (NC) NC	-	-	21	26	31	35	38	42	45	50
3.61	72 x 8	48 x 12	30 x 18		Flow Rate (cfm)	1444	1805	2166	2527	2888	3249	3610	3971	4332	5054
	60 x 10	36 x 16	24 x 24		Sound (NC)	-	15	21	26	31	35	39	42	45	50
4.29	48 x 14	32 x 20			Flow Rate (cfm)	1716	2145	2574	3003	3432	3861	4290	4719	5148	6006
	36 x 18	28 x 24			Sound (NC)	-	15	21	27	31	36	39	43	46	51
4.65	72 x 10	36 x 20			Flow Rate (cfm)	1860	2325	2790	3255	3720	4185	4650	5115	5580	6510
	48 x 16	30 x 24			Sound (NC)	-	15	22	27	32	36	39	43	46	51
5.58	72 x 12	48 x 18			Flow Rate (cfm)	2232	2790	3348	3906	4464	5022	5580	6138	6696	7812
	60 x 14	36 x 24			Sound (NC)	-	16	22	27	32	36	40	43	46	52
6.25	72 x 14	48 x 20			Flow Rate (cfm)	2500	3125	3750	4375	5000	5625	6250	6875	7500	8750
	60 x 16	30 x 30			Sound (NC)	-	16	22	23	32	37	40	43	47	52
				NC20	NC 30			NC 40			NC 50				

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.87.
— Subtract 4 from listed NC.

PERFORMANCE DATA

96 / 96FH — 3/4 in. blade spacing, 45° deflection steel

Core Area (sq. ft.)	Nominal Size	NC 20										
		Core Velocity (fpm)	200	250	300	350	400	500	600	700	800	900
		Velocity Pressure (in. w.g.)	0.003	0.004	0.006	0.008	0.010	0.016	0.022	0.031	0.040	0.051
		Neg Static Pressure (in. w.g.)	0.006	0.010	0.014	0.019	0.025	0.040	0.057	0.077	0.101	0.129
0.15	7 x 4 6 x 5	Flow Rate (cfm)	30	37	45	52	60	75	90	105	120	135
		Sound (NC)	-	-	-	-	-	-	15	20	24	27
0.18	8 x 4 6 x 6 7 x 5	Flow Rate (cfm)	36	45	54	63	72	90	108	126	144	162
		Sound (NC)	-	-	-	-	-	-	16	20	24	28
0.22	7 x 6 8 x 5	Flow Rate (cfm)	44	55	66	77	88	110	132	154	176	198
		Sound (NC)	-	-	-	-	-	-	17	21	25	29
0.26	12 x 4 8 x 6 10 x 5	Flow Rate (cfm)	52	65	78	91	104	130	156	182	208	234
		Sound (NC)	-	-	-	-	-	-	17	22	26	29
0.30	14 x 4	Flow Rate (cfm)	60	75	90	105	120	150	180	210	240	270
		Sound (NC)	-	-	-	-	-	-	18	23	26	30
0.34	16 x 4 10 x 6 12 x 5	Flow Rate (cfm)	68	85	102	119	136	170	204	238	272	306
		Sound (NC)	-	-	-	-	-	-	18	23	27	30
0.39	18 x 4 12 x 6 14 x 5 8 x 8	Flow Rate (cfm)	78	98	117	137	156	195	234	273	312	351
		Sound (NC)	-	-	-	-	-	-	19	24	28	31
0.46	20 x 4 14 x 6 16 x 5 10 x 8	Flow Rate (cfm)	92	115	138	161	184	230	276	322	368	414
		Sound (NC)	-	-	-	-	-	-	20	24	28	32
0.52	24 x 4 16 x 6 18 x 5	Flow Rate (cfm)	104	130	156	182	208	260	312	364	416	468
		Sound (NC)	-	-	-	-	-	15	20	25	29	32
0.60	28 x 4 18 x 6 10 x 10 20 x 5 12 x 8	Flow Rate (cfm)	120	150	180	210	240	300	360	420	480	540
		Sound (NC)	-	-	-	-	-	15	21	25	29	33
0.69	30 x 4 20 x 6 12 x 10 24 x 5 14 x 8	Flow Rate (cfm)	138	173	207	242	276	345	414	483	552	621
		Sound (NC)	-	-	-	-	-	15	21	25	29	33
0.81	36 x 4 22 x 6 14 x 10 28 x 5 16 x 8	Flow Rate (cfm)	162	202	243	283	324	405	486	567	648	729
		Sound (NC)	-	-	-	-	-	17	22	27	31	34
0.90	40 x 4 26 x 6 16 x 10 30 x 5 18 x 8 12 x 12	Flow Rate (cfm)	180	225	270	315	360	450	540	630	720	810
		Sound (NC)	-	-	-	-	-	17	22	27	31	34
1.07	48 x 4 30 x 6 14 x 12 36 x 5 18 x 10	Flow Rate (cfm)	214	267	321	374	428	535	642	749	856	963
		Sound (NC)	-	-	-	-	-	18	23	28	32	35
1.18	34 x 6 20 x 10 14 x 14 24 x 8 16 x 12	Flow Rate (cfm)	236	295	354	413	472	590	708	826	944	1062
		Sound (NC)	-	-	-	-	-	19	24	28	32	36
1.34	60 x 4 36 x 6 16 x 14 48 x 5 18 x 12	Flow Rate (cfm)	268	335	402	469	536	670	804	938	1072	1206
		Sound (NC)	-	-	-	-	-	19	24	29	33	36
1.60	72 x 4 24 x 10 18 x 14 30 x 8 22 x 12 16 x 16	Flow Rate (cfm)	320	400	480	560	640	800	960	1120	1280	1440
		Sound (NC)	-	-	-	-	-	19	25	29	33	37
1.80	60 x 5 36 x 8 24 x 12 18 x 16 48 x 6 30 x 10 20 x 14	Flow Rate (cfm)	360	450	540	630	720	900	1080	1260	1440	1620
		Sound (NC)	-	-	-	-	-	20	25	30	34	37
2.08	72 x 5 40 x 8 30 x 12 20 x 16 60 x 6 36 x 10 24 x 14 18 x 18	Flow Rate (cfm)	416	520	624	728	832	1040	1248	1456	1664	1872
		Sound (NC)	-	-	-	-	-	21	26	31	34	38
2.45	72 x 6 32 x 12 24 x 16 48 x 8 26 x 14 20 x 18	Flow Rate (cfm)	490	612	735	857	980	1225	1470	1715	1916	2205
		Sound (NC)	-	-	-	-	15	21	27	31	35	39
2.78	36 x 12 26 x 16 22 x 20 30 x 14 24 x 18	Flow Rate (cfm)	556	695	834	973	1112	1390	1668	1946	2224	2502
		Sound (NC)	-	-	-	-	15	22	27	32	36	39
3.11	60 x 8 40 x 12 30 x 16 24 x 20 48 x 10 36 x 14 26 x 18	Flow Rate (cfm)	622	777	933	1088	1244	1555	1866	2177	2488	2799
		Sound (NC) NC	-	-	-	-	16	22	28	32	36	40
3.61	72 x 8 48 x 12 30 x 18 60 x 10 36 x 16 24 x 24	Flow Rate (cfm)	722	902	1083	1263	1444	1805	2166	2527	2888	3249
		Sound (NC)	-	-	-	-	16	23	28	33	37	40
4.29	48 x 14 32 x 20 36 x 18 28 x 24	Flow Rate (cfm)	858	1072	1287	1501	1716	2145	2574	3003	3432	3861
		Sound (NC)	-	-	-	-	17	24	29	34	37	41
4.65	72 x 10 36 x 20 48 x 16 30 x 24	Flow Rate (cfm)	930	1162	1395	1627	1860	2325	2790	3255	3720	4185
		Sound (NC)	-	-	-	-	17	24	29	34	38	41
5.58	72 x 12 48 x 18 60 x 14 36 x 24	Flow Rate (cfm)	1116	1395	1674	1953	2232	2790	3348	3906	4464	5022
		Sound (NC)	-	-	-	14	18	25	20	35	38	42
6.25	72 x 14 48 x 20 60 x 16 30 x 30	Flow Rate (cfm)	1250	1562	1875	2187	2500	3125	3750	4375	5000	5625
		Sound (NC)	-	-	-	15	18	25	30	35	39	42

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.90.
— Subtract 5 from listed NC.

PERFORMANCE DATA

97 — 1/2 in. blade spacing, 0° deflection, ext. alum.

Core Area (sq. ft.)	Nominal Size	NC 20										
		Core Velocity (fpm)	200	250	300	350	400	500	600	700	800	900
		Velocity Pressure (in. w.g.)	0.003	0.004	0.006	0.008	0.010	0.016	0.022	0.031	0.040	0.051
		Neg Static Pressure (in. w.g.)	0.006	0.010	0.014	0.018	0.024	0.038	0.054	0.074	0.097	0.122
0.15	7 x 4 6 x 5	Flow Rate (cfm)	30	38	45	53	60	75	90	105	120	135
		Sound (NC)	-	-	-	-	-	-	-	16	20	24
0.18	8 x 4 6 x 6 7 x 5	Flow Rate (cfm)	36	45	54	63	72	90	108	126	144	162
		Sound (NC)	-	-	-	-	-	-	-	18	22	25
0.22	7 x 6 8 x 5	Flow Rate (cfm)	44	55	66	77	88	110	132	154	176	198
		Sound (NC)	-	-	-	-	-	-	-	19	23	26
0.26	12 x 4 8 x 6 10 x 5	Flow Rate (cfm)	52	65	78	91	104	130	156	182	208	234
		Sound (NC)	-	-	-	-	-	-	15	20	24	27
0.30	14 x 4	Flow Rate (cfm)	60	75	90	105	120	150	180	210	240	270
		Sound (NC)	-	-	-	-	-	-	16	20	24	28
0.34	16 x 4 10 x 6 12 x 5	Flow Rate (cfm)	68	85	102	119	136	170	204	238	272	306
		Sound (NC)	-	-	-	-	-	-	16	21	25	29
0.39	18 x 4 12 x 6 14 x 5 8 x 8	Flow Rate (cfm)	78	98	117	137	156	195	234	273	312	351
		Sound (NC)	-	-	-	-	-	-	17	22	26	29
0.46	20 x 4 14 x 6 16 x 5 10 x 8	Flow Rate (cfm)	92	115	138	161	184	230	276	322	368	414
		Sound (NC)	-	-	-	-	-	-	18	23	27	30
0.52	24 x 4 16 x 6 18 x 5	Flow Rate (cfm)	104	130	156	182	208	260	312	364	416	468
		Sound (NC)	-	-	-	-	-	-	19	24	28	31
0.60	28 x 4 18 x 6 10 x 10 20 x 5 12 x 8	Flow Rate (cfm)	120	150	180	210	240	300	360	420	480	540
		Sound (NC)	-	-	-	-	-	-	20	24	28	32
0.69	30 x 4 20 x 6 12 x 10 24 x 5 14 x 8	Flow Rate (cfm)	138	173	207	242	276	345	414	483	552	621
		Sound (NC)	-	-	-	-	-	15	20	25	29	33
0.81	36 x 4 22 x 6 14 x 10 28 x 5 16 x 8	Flow Rate (cfm)	162	203	243	283	324	405	486	567	648	729
		Sound (NC)	-	-	-	-	-	16	21	26	30	34
0.90	40 x 4 26 x 6 16 x 10 30 x 5 18 x 8 12 x 12	Flow Rate (cfm)	180	225	270	315	360	450	540	630	720	810
		Sound (NC)	-	-	-	-	-	16	22	27	31	34
1.07	48 x 4 30 x 6 14 x 12 36 x 5 18 x 10	Flow Rate (cfm)	214	268	321	375	428	535	642	749	856	963
		Sound (NC)	-	-	-	-	-	17	23	28	32	35
1.18	34 x 6 20 x 10 14 x 14 24 x 8 16 x 12	Flow Rate (cfm)	236	295	354	413	472	590	708	826	944	1062
		Sound (NC)	-	-	-	-	-	18	23	28	32	36
1.34	60 x 4 36 x 6 16 x 14 48 x 5 18 x 12	Flow Rate (cfm)	268	335	402	469	536	670	804	938	1072	1206
		Sound (NC)	-	-	-	-	-	19	24	29	33	36
1.60	72 x 4 24 x 10 18 x 14 30 x 8 22 x 12 16 x 16	Flow Rate (cfm)	320	400	480	560	640	800	960	1120	1280	1440
		Sound (NC)	-	-	-	-	-	20	25	30	34	37
1.80	60 x 5 36 x 8 24 x 12 18 x 16 48 x 6 30 x 10 20 x 14	Flow Rate (cfm)	360	450	540	630	720	900	1080	1260	1440	1620
		Sound (NC)	-	-	-	-	-	20	26	31	35	38
2.08	72 x 5 40 x 8 30 x 12 20 x 16 60 x 6 36 x 10 24 x 14 18 x 18	Flow Rate (cfm)	416	520	624	728	832	1040	1248	1456	1664	1872
		Sound (NC)	-	-	-	-	-	21	27	31	35	39
2.45	72 x 6 32 x 12 24 x 16 48 x 8 26 x 14 20 x 18	Flow Rate (cfm)	490	613	735	858	980	1225	1470	1715	1916	2205
		Sound (NC)	-	-	-	-	15	22	28	32	36	40
2.78	36 x 12 26 x 16 22 x 20 30 x 14 24 x 18	Flow Rate (cfm)	556	695	834	973	1112	1390	1668	1946	2224	2502
		Sound (NC)	-	-	-	-	16	23	28	33	37	41
3.11	60 x 8 40 x 12 30 x 16 24 x 20 48 x 10 36 x 14 26 x 18	Flow Rate (cfm)	622	778	933	1089	1244	1555	1866	2177	2488	2799
		Sound (NC) NC	-	-	-	-	17	23	29	34	38	41
3.61	72 x 8 48 x 12 30 x 18 60 x 10 36 x 16 24 x 24	Flow Rate (cfm)	722	903	1083	1264	1444	1805	2166	2527	2888	3249
		Sound (NC)	-	-	-	-	17	24	30	34	38	42
4.29	48 x 14 32 x 20 36 x 18 28 x 24	Flow Rate (cfm)	858	1073	1287	1502	1716	2145	2574	3003	3432	3861
		Sound (NC)	-	-	-	-	18	25	31	35	39	43
4.65	72 x 10 36 x 20 48 x 16 30 x 24	Flow Rate (cfm)	930	1163	1395	1628	1860	2325	2790	3255	3720	4185
		Sound (NC)	-	-	-	15	19	26	31	36	40	43
5.58	72 x 12 48 x 18 60 x 14 36 x 24	Flow Rate (cfm)	1116	1395	1674	1953	2232	2790	3348	3906	4464	5022
		Sound (NC)	-	-	-	16	20	27	32	37	41	44
6.25	72 x 14 48 x 20 60 x 16 30 x 30	Flow Rate (cfm)	1250	1563	1875	2188	2500	3125	3750	4375	5000	5625
		Sound (NC)	-	-	-	16	20	27	33	38	42	45

NC 20 NC 30 NC 40

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.87.
— Subtract 7 from listed NC.

PERFORMANCE DATA

98 — 1/2 in. blade spacing, 45° deflection, ext. alum.

Core Area (sq. ft.)	Nominal Size	NC 20						
		Core Velocity (fpm)	200	250	300	350	400	450
		Velocity Pressure (in. w.g.)	0.002	0.004	0.006	0.008	0.010	0.013
		Neg Static Pressure (in. w.g.)	0.021	0.033	0.047	0.064	0.083	0.102
0.15	7 x 4	Flow Rate (cfm)	30	37	45	52	60	70
	6 x 5	Sound (NC)	—	—	—	18	21	24
0.18	8 x 4	Flow Rate (cfm)	36	45	54	63	72	81
	7 x 5	Sound (NC)	—	—	—	18	21	24
0.22	10 x 4	Flow Rate (cfm)	44	55	66	77	88	100
	8 x 5	Sound (NC)	—	—	15	19	22	25
0.26	12 x 4	Flow Rate (cfm)	52	65	78	91	104	117
	10 x 5	Sound (NC)	—	—	15	19	22	25
0.30	14 x 4	Flow Rate (cfm)	60	75	90	105	120	135
		Sound (NC)	—	—	16	20	23	26
0.34	16 x 4	Flow Rate (cfm)	68	85	102	119	136	153
	12 x 5	Sound (NC)	—	—	16	20	23	26
0.39	18 x 4	Flow Rate (cfm)	78	98	117	137	156	176
	14 x 5	Sound (NC)	—	—	17	21	24	27
0.46	20 x 4	Flow Rate (cfm)	92	115	138	161	184	207
	16 x 5	Sound (NC)	—	—	17	21	24	27
0.52	24 x 4	Flow Rate (cfm)	104	130	156	182	208	234
	18 x 5	Sound (NC)	—	—	17	21	24	27
0.60	28 x 4	Flow Rate (cfm)	120	150	180	210	240	270
	20 x 5	Sound (NC)	—	—	18	22	25	28
0.69	30 x 4	Flow Rate (cfm)	138	173	207	242	276	311
	24 x 5	Sound (NC)	—	—	18	22	25	28
0.81	36 x 4	Flow Rate (cfm)	162	202	243	283	324	365
	28 x 5	Sound (NC)	—	—	18	22	25	28
0.90	40 x 4	Flow Rate (cfm)	180	225	270	315	360	405
	30 x 5	Sound (NC)	—	—	19	23	26	29
1.07	48 x 4	Flow Rate (cfm)	214	267	321	374	428	482
	36 x 5	Sound (NC)	—	—	19	23	26	29
1.18	34 x 6	Flow Rate (cfm)	236	295	354	413	472	531
	24 x 8	Sound (NC)	—	—	19	23	26	29
1.34	60 x 4	Flow Rate (cfm)	268	335	402	469	536	603
	48 x 5	Sound (NC)	—	15	20	24	27	30
1.60	72 x 4	Flow Rate (cfm)	320	400	480	560	640	720
	30 x 8	Sound (NC)	—	15	20	24	27	30
1.80	60 x 5	Flow Rate (cfm)	360	450	540	630	720	810
	48 x 6	Sound (NC)	—	16	21	25	28	31
2.08	72 x 5	Flow Rate (cfm)	416	520	624	728	832	936
	60 x 6	Sound (NC)	—	16	21	25	28	31
2.45	72 x 6	Flow Rate (cfm)	490	612	735	857	980	1103
	48 x 8	Sound (NC)	—	16	21	25	28	31
2.78	36 x 12	Flow Rate (cfm)	556	695	834	973	1112	1251
	30 x 14	Sound (NC)	—	17	22	26	29	32
3.11	60 x 8	Flow Rate (cfm)	622	777	933	1088	1244	1400
	48 x 10	Sound (NC) NC	—	17	22	26	29	32
3.61	72 x 8	Flow Rate (cfm)	722	902	1083	1263	1444	1625
	60 x 10	Sound (NC)	—	17	22	26	29	32
4.29	48 x 14	Flow Rate (cfm)	858	1072	1287	1501	1716	1930
	36 x 18	Sound (NC)	—	18	23	27	30	33
4.65	72 x 10	Flow Rate (cfm)	930	1162	1395	1627	1860	2093
	48 x 16	Sound (NC)	—	18	23	27	30	33
5.58	72 x 12	Flow Rate (cfm)	1116	1395	1674	1953	2232	2511
	60 x 14	Sound (NC)	—	18	23	27	30	33
6.25	72 x 14	Flow Rate (cfm)	1250	1562	1875	2187	2500	2813
	60 x 16	Sound (NC)	—	19	24	28	31	34

Performance Notes:

- Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
- Air flow is in cfm.
- All pressures are in in. w.g. s.p. = Static Pressure.
- Core style 98 is not recommended for core velocities in excess of 450 fpm.
- NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille.
- Blanks "-" indicate an NC level below 15.
- Grille tested with damper. Corrections for grille without damper:
— Multiply negative static pressure by 0.96.
— Subtract 2 from listed NC.



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at [priceindustries.com](https://www.priceindustries.com). The complete Price product catalog can be viewed online at [priceindustries.com](https://www.priceindustries.com).