

10


PERFORATED RETURN GRILLE



10


Perforated Return Grille

The 10 Series Perforated Return Grille is designed to match perforated supply diffusers to provide a coordinated aesthetic throughout a space. Featuring 51% free area, the 10 Series grille maintains low noise and pressure drop in high capacity return applications.

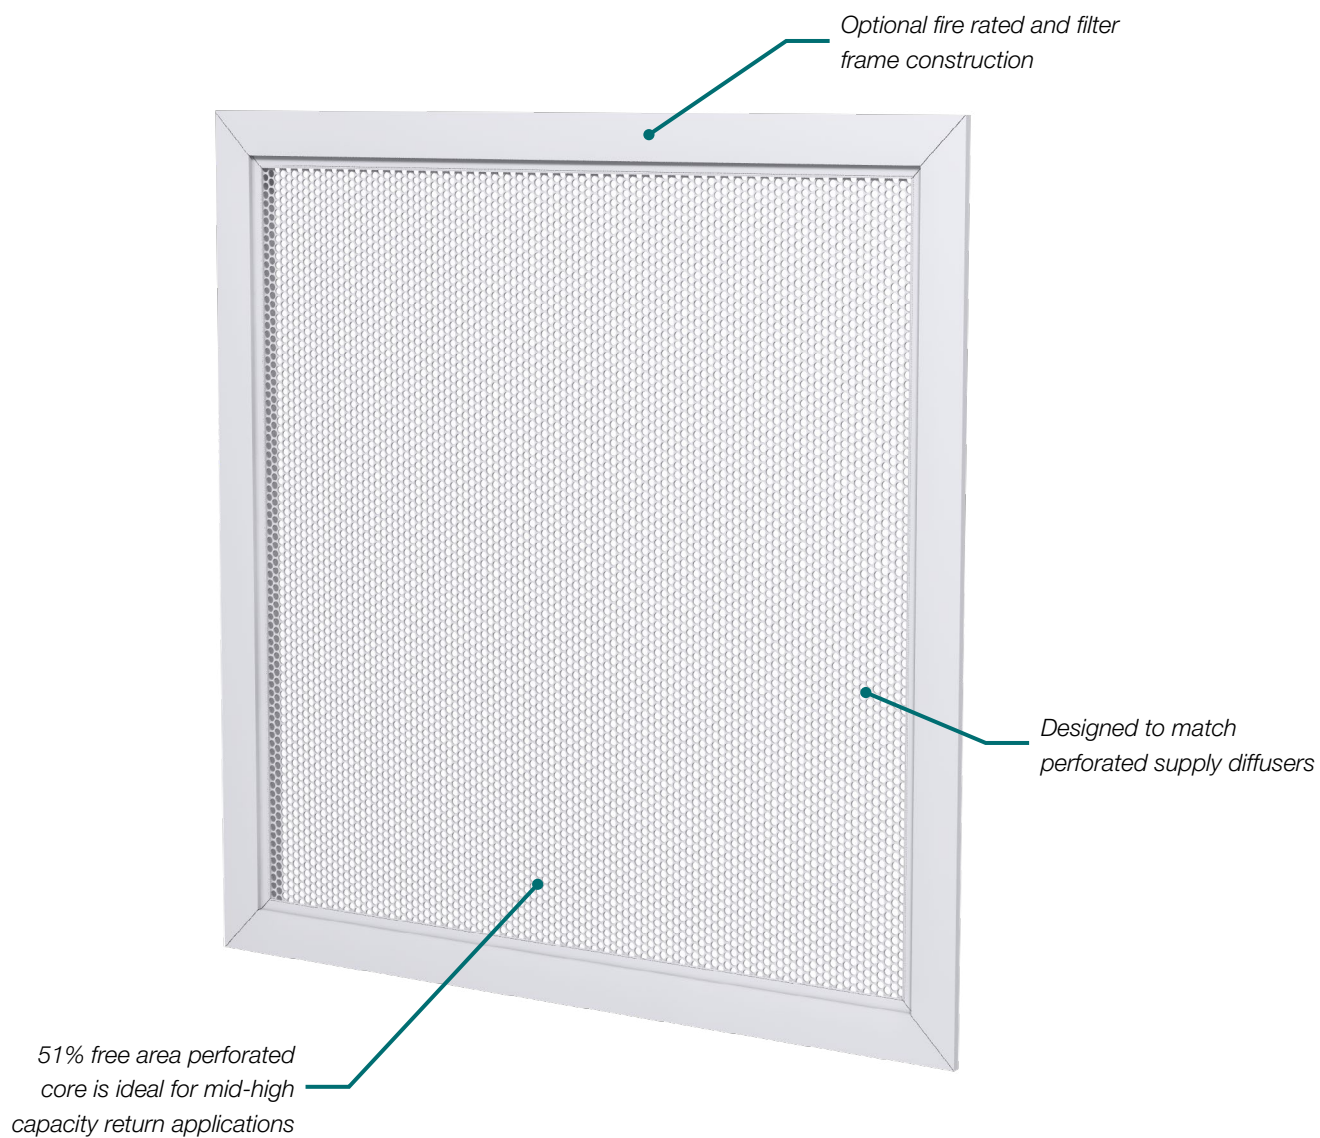

FIRE RATED CONSTRUCTION


- + With the fire rated option, the 10 Series grille is a Fire Rated Assembly listed in the Underwriters Laboratories (UL) Fire Resistance Directory.
- + Fire rated models meet UL time vs. temperature test criteria and NFPA 90A requirements.
- + Fire rated construction incorporates a thermal blanket and fire damper.
- + The curtain style fire damper is available with either a 165°F or 212°F fusible link.
- + The fire rated option is only available for use in exposed grid suspended ceilings (T-Bar Lay-in) and must be installed in accordance with the installation instructions.



Fire rated construction

FILTER FRAME

- + The filter frame option accepts standard 1 in. and 2 in. filter media and is available in two styles that allow access to the filter for cleaning including:
 - A combination of ¼ turn fasteners and a hinge-tab mechanism that allows hinging of the grille face.
 - ¼ turn quick release fasteners that allow complete removal of the grille.

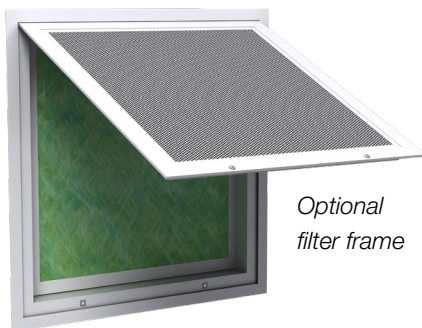

Optional filter frame

TYPICAL APPLICATIONS

The 10 Series grille is typically used in ceiling applications where architectural appeal is a main requirement. With high free area, the 10 Series grille is intended to be used as a mid to high capacity return grille.

CONSTRUCTION

- + Core Material
 - Steel (10)
 - Aluminum (10A)
 - Stainless steel (10SS)
- + Size
 - Minimum: 6 in. x 4 in.
 - Maximum (single piece): 24 in. x 48 in.
 - Oversized construction available
- + Options
 - Fire rated construction (10-FR)
 - Filter frame (10FF)
 - Filter frame, fire rated (10FF-FR)
 - Mounting frame
 - Steel damper
 - Aluminum damper

PERFORMANCE DATA

10, 10FF

Core Area (sq. ft.)	Nominal Size		Core Velocity (fpm) Velocity Pressure (in. w.g.) Neg. Static Pressure (in. w.g.)	NC20				NC30				
				200	300	400	500	600	700	800	900	1000
				0.002	0.006	0.010	0.016	0.022	0.031	0.040	0.050	0.062
			0.019	0.043	0.076	0.118	0.171	0.232	0.303	0.384	0.474	
0.15	6 x 5		Flow Rate (cfm)	30	45	60	75	90	105	120	135	150
	7 x 4		Sound (NC)	-	-	-	20	25	29	33	36	39
0.18	6 x 6	7 x 5	Flow Rate (cfm)	36	54	72	90	108	126	144	162	180
	8 x 4		Sound (NC)	-	-	-	20	25	29	33	36	39
0.22	7 x 6		Flow Rate (cfm)	44	66	88	110	132	154	176	198	220
	10 x 4		Sound (NC)	-	-	-	20	25	29	33	36	39
0.26	8 x 6	10 x 5	Flow Rate (cfm)	52	78	104	130	156	182	208	234	260
	12 x 4		Sound (NC)	-	-	-	20	25	29	33	36	39
0.30	14 x 4		Flow Rate (cfm)	60	90	120	150	180	210	240	270	300
			Sound (NC)	-	-	-	20	25	29	33	36	39
0.34	10 x 6	12 x 5	Flow Rate (cfm)	68	102	136	170	204	238	272	306	340
	16 x 4		Sound (NC)	-	-	-	20	25	29	33	36	39
0.39	8 x 8	12 x 6	Flow Rate (cfm)	78	117	156	195	234	273	312	351	390
	14 x 5	18 x 4	Sound (NC)	-	-	-	20	25	29	33	36	39
0.46	20 x 4	14 x 6	Flow Rate (cfm)	92	138	184	230	276	322	368	414	460
	16 x 5	10 x 8	Sound (NC)	-	-	-	20	25	29	33	36	39
0.52	24 x 4	16 x 6	Flow Rate (cfm)	104	156	208	260	312	364	416	468	520
	18 x 5		Sound (NC)	-	-	-	20	25	29	33	36	39
0.60	28 x 4	18 x 6	10 x 10	Flow Rate (cfm)	120	180	240	300	360	420	480	540
	20 x 5	12 x 8		Sound (NC)	-	-	-	20	25	29	33	36
0.69	30 x 4	20 x 6	12 x 10	Flow Rate (cfm)	138	207	276	345	414	483	552	621
	24 x 5	14 x 8		Sound (NC)	-	-	-	20	25	29	33	36
0.81	36 x 4	22 x 6	14 x 10	Flow Rate (cfm)	162	243	324	405	486	567	648	729
	28 x 5	16 x 8		Sound (NC)	-	-	-	20	25	29	33	36
0.90	40 x 4	26 x 6	16 x 10	Flow Rate (cfm)	180	270	360	450	540	630	720	810
	30 x 5	18 x 8	12 x 12	Sound (NC)	-	-	-	20	25	29	33	36
1.07	48 x 4	30 x 6	14 x 12	Flow Rate (cfm)	214	321	428	535	642	749	856	963
	36 x 5	18 x 10		Sound (NC)	-	-	-	20	25	29	33	36
1.18	34 x 6	20 x 10	14 x 14	Flow Rate (cfm)	236	354	472	590	708	826	944	1062
	24 x 8	16 x 12		Sound (NC)	-	-	-	20	25	29	33	36
1.34	60 x 4	36 x 6	16 x 14	Flow Rate (cfm)	268	402	536	670	804	938	1072	1206
	48 x 5	18 x 12		Sound (NC)	-	-	-	20	25	29	33	36
1.60	72 x 4	24 x 10	18 x 14	Flow Rate (cfm)	320	480	640	800	960	1120	1280	1440
	30 x 8	22 x 12	16 x 16	Sound (NC)	-	-	-	20	25	29	33	36
1.80	60 x 5	36 x 8	24 x 12	18 x 16	Flow Rate (cfm)	360	540	720	900	1080	1260	1440
	48 x 6	30 x 10	20 x 14		Sound (NC)	-	-	-	20	25	29	33
2.08	72 x 5	40 x 8	30 x 12	20 x 16	Flow Rate (cfm)	416	624	832	1040	1248	1456	1664
	60 x 6	36 x 10	24 x 14	18 x 18	Sound (NC)	-	-	-	20	25	29	33
2.45	72 x 6	32 x 12	24 x 16		Flow Rate (cfm)	490	735	980	1225	1470	1715	1960
	48 x 8	26 x 14	20 x 18		Sound (NC)	-	-	-	20	25	29	33
2.78	36 x 12	26 x 16	22 x 20		Flow Rate (cfm)	556	834	1112	1390	1668	1946	2224
	30 x 14	24 x 18			Sound (NC)	-	-	-	20	25	29	33
3.11	60 x 8	40 x 12	30 x 16	24 x 20	Flow Rate (cfm)	622	933	1244	1555	1866	2177	2488
	48 x 10	36 x 14	26 x 18		Sound (NC)	-	-	-	20	25	29	33
3.61	72 x 8	48 x 12	30 x 18		Flow Rate (cfm)	722	1083	1444	1805	2166	2527	2888
	60 x 10	36 x 16	24 x 24		Sound (NC)	-	-	-	20	25	29	33
4.29	48 x 14	32 x 20			Flow Rate (cfm)	858	1287	1716	2145	2574	3003	3432
	36 x 18	28 x 24			Sound (NC)	-	-	-	20	25	29	33
4.65	72 x 10	36 x 20			Flow Rate (cfm)	930	1395	1860	2325	2790	3255	3720
	48 x 16	30 x 24			Sound (NC)	-	-	-	20	25	29	33
5.58	72 x 12	48 x 18			Flow Rate (cfm)	1116	1674	2232	2790	3348	3906	4468
	60 x 14	36 x 24			Sound (NC)	-	-	-	20	25	29	33
6.25	72 x 14	48 x 20			Flow Rate (cfm)	1250	1875	2500	3125	3750	4375	5000
	60 x 16	30 x 30			Sound (NC)	-	-	-	20	25	29	33
				NC20				NC30				

Performance Notes

1. Tested in accordance with ASHRAE Standard 70-2023 "Method of Testing for Rating the Performance of Air Outlets and Inlets."
2. Air flow is in cfm.
3. All pressures are in in. w.g. s.p. = Static Pressure.
4. NC values are based on room absorption of 10 dB re 10⁻¹² Watts and one grille. Blanks (-) indicate an NC level below 15.
5. Does not include effects of ceiling radiation damper (10-FR, 10FF-FR).



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at [priceindustries.com](https://www.priceindustries.com). The complete Price product catalog can be viewed online at [priceindustries.com](https://www.priceindustries.com).