



Submittal Data Sheet

1.5t eev wall mount ah

AWVE18SU1300

STANDARD FEATURES

- Electronic Expansion Valve (EEV) for cooling and heat pump applications
- Optimized for use with R-32 refrigerant AHRI certified
- ETL listed
- Factory installed R-32 sensor designed for the lifespan of the coil
- Variable-speed ECM blower motor provides constant CFM over a wide range of static pressure conditions independent of duct system
- Compatible with Goodman brand smart thermostat and other Daikin brand communicating thermostats
- Aluminum tubing coils on all models
- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- UL 60335 2-40 Compliant

CABINET FEATURES

- Fault recall of six most recent faults
- Thermoplastic drain pan with bottom primary and secondary drain connections
- Built-in filter rack (filter included)
- Large chassis (2½- and 3-ton units) –front return only
- Small chassis (1, 1½ and 2 ton units) –front or bottom return
- Wall-hanging bracket provided
- Field installed 3 kW electric heater kit option available for large chassis only





Submittal Data Sheet

1.5t eev wall mount ah
AWVE18SU1300

PERFORMANCE


Product Model No.	AWVE18SU1300	Product Model Name:	1.5t eev wall mount ah
Type:	Air Handler	Cooling Capacity (Nominal) (Btu/hr):	17,000
Blower Motor Rating (HP):	1/3		

PRODUCT DETAILS




Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (High) (CFM):	
Min. Circuit Amps MCA (A):	3.5/3.5	Suction Valve Connection Size (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15/15	Liquid Valve Connection Size (inch):	3/8
Dimensions (HxWxD) (in):	36 x 20-3/13 x 13-1/8	Condensate Connection (inch):	3/4
Net Weight (lb):	77	Blower Size Diameter (inch):	10
Gross Weight (lb):	100	Blower Size Width (inch):	6

DIMENSIONAL DRAWING

DIMENSIONS

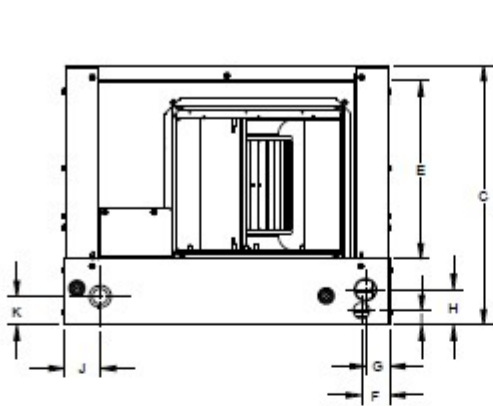

TOP VIEW

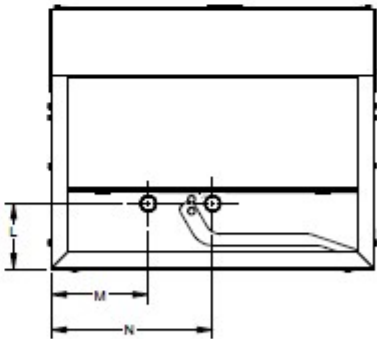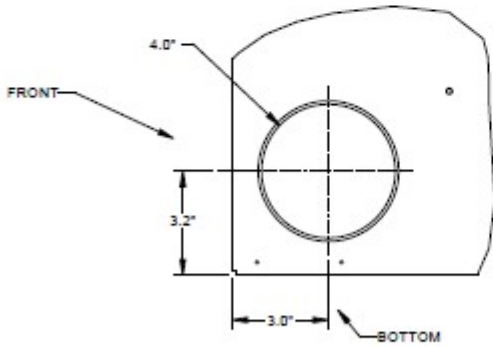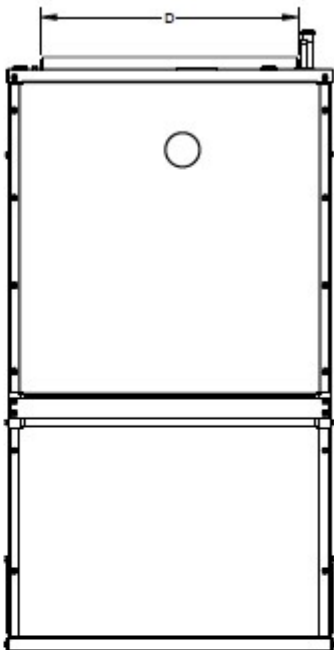

BOTTOM VIEW

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
AWVE 12,18,24	36"	20 1/4"	16 1/4"	16"	11"	1 1/4"	1 1/4"	2 1/4"	3/8"	1 1/8"	1 1/4"	4"	6"	10"
AWVE 30,36	36"	24"	21"	19 1/4"	16"	4 1/4"	1 1/4"	1 1/4"	2"	1 1/4"	2 1/4"	4"	8"	12"