



Submittal Data Sheet

FIT 16.2 S2 R32 Inv-1.5T HP

DH6VSA181M

STANDARD FEATURES

- Daikin variable-speed swing compressor
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Daikin One+ smart thermostat and other Daikin communicating equipment
- Daikin control algorithmic logic
- Intelligent Defrost Mode
- In communicating mode, only two lowvoltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Daikin Inside intelligence for diagnostics
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Muffler on 1.0 - 3.0 - ton models
- Sweat connection service valves with easy access to gauge ports
- Advanced water-shedding drain pan
- Hot start technology
- AHRI Certified
- ETL Listed

CABINET FEATURES

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)





Submittal Data Sheet
FIT 16.2 S2 R32 Inv-1.5T HP
DH6VSA181M

PERFORMANCE COMBINATION (HSVTC) * VALUES SHOWN ARE FOR AHRI RATED HIGH SALES VOLUME TESTED

Outdoor Unit Model No.	DH6VSA181M	Outdoor Unit Name:	FIT 16.2 S2 R32 Inv-1.5T HP
Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 47 / 43
Max/Min Cooling Capacity (Btu/hr):		Max/Min Heating Capacity (Btu/hr):	
* Rated Cooling Capacity (Btu/hr):	17,000	* Rated Heating Capacity (Btu/hr):	17,200
* EER:		* EER2:	11.00
* SEER:		* SEER2:	16.50
* HSPF:		* HSPF2:	8.5
* Heating COP:	3.2		

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Min. Circuit Amps MCA (A):	12.8	Suction Valve Connection Size (inch):	3/4
Max Overcurrent Protection (MOP) (A):	15	Liquid Valve Connection Size (inch):	3/8
Fan/Compressor Drive Input:	8.1	Sound Power (High) (dBA):	61
Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	0 - 115
Holding Refrigerant Charge (ozs):	74	Heating Operation Range (°F DB):	-10 - 70
Additional Charge (ounces/ft):		Max. Pipe Length (Vertical) (ft):	90
Pre-charge Piping (Length) (ft):	15	Min. Cooling Range w/Baffle (°F DB):	
Max. Pipe Length (Total) (ft):	125	Min. Heating Range w/Baffle (°F DB):	
Net Weight (lb):	122	Gross Weight (lb):	123
Dimensions (HxWxD) (in):	27.375 x 36-5/8 x 13.75		


Submittal Data Sheet

FIT 16.2 S2 R32 Inv-1.5T HP

DH6VSA181M

DIMENSIONAL DRAWING

MODEL	DIMENSIONS		
	W"	D"	H"
DH6VSA121MA*	36%	13%	27%
DH6VSA181MA*	36%	13%	27%
DH6VSA241MA*	36%	13%	27%
DH6VSA301MA*	36%	13%	27%
DH6VSA361MA*	36%	13%	27%

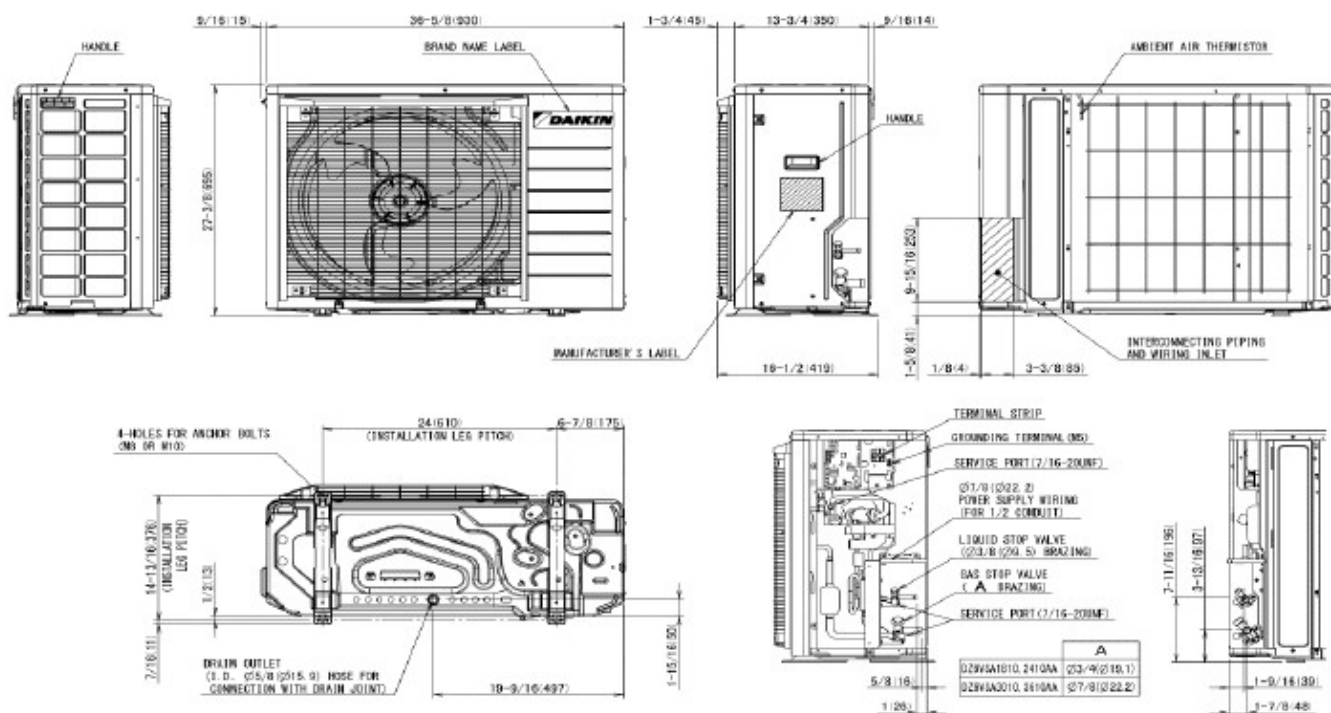

IN CASE OF REMOVING RIGHT SIDE PLATE