



Submittal Data Sheet

1.5T Cased Upflow/Downflow R-32 Coil with TXV

CAPTA1818B3

STANDARD FEATURES

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Factory-installed thermal expansion valves for cooling and heat pump applications
- Standardized copper suction tube stub length
- Check flowrator for cooling and heat pump applications
- Vertical application
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pan featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified
- ETL Listed





Submittal Data Sheet
1.5T Cased Upflow/Downflow R-32 Coil with TXV
CAPTA1818B3

PERFORMANCE

Product Model No.	CAPTA1818B3	Product Model Name:	1.5T Cased Upflow/Downflow R-32 Coil with TXV
Type:	Coil	Cooling Capacity (Nominal) (Btu/hr):	18,000

PRODUCT DETAILS

Dimensions (HxWxD) (in):	18 x 17-1/2 x 21	Suction Valve Connection Size (inch):	3/4
Net Weight (lb):	38	Liquid Valve Connection Size (inch):	3/8
Gross Weight (lb):	40	Condensate Connection (inch):	3/4

Submittal Data Sheet

1.5T Cased Upflow/Downflow R-32 Coil with TXV

CAPTA1818B3


DIMENSIONAL DRAWING

SPECIFICATIONS

MODEL	CABINET DIMENSIONS			NOMINAL TONS	CONNECTION		SHIP WEIGHT (LB5)
	W	D	H		LIQUID	SUCTION	
CAPTA1818A3	14"	21"	18"	1½	⅜"	¾"	30
CAPTA1818B3	17½"	21"	18"	1½	⅜"	¾"	35
CAPTA2422A3	14"	21"	22"	1½ - 2	⅜"	¾"	37
CAPTA2422B3	17½"	21"	22"	1½ - 2	⅜"	¾"	40
CAPTA2422C3	21"	21"	22"	1½ - 2	⅜"	¾"	43
CAPTA3022A3	14"	21"	22"	2 - 2½	⅜"	¾"	37
CAPTA3022B3	17½"	21"	22"	2 - 2½	⅜"	¾"	40
CAPTA3022C3	21"	21"	22"	2 - 2½	⅜"	¾"	43
CAPTA3026B3	17½"	21"	26"	1½ - 2½	⅜"	⅝"	46
CAPTA3026C3	21"	21"	26"	1½ - 2½	⅜"	⅝"	51
CAPTA3626B3	17½"	21"	26"	2 - 3	⅜"	⅝"	48
CAPTA3626C3	21"	21"	26"	2 - 3	⅜"	⅝"	51
CAPTA4230C3	21"	21"	30"	2½ - 3½	⅜"	⅝"	66
CAPTA4230D3	24½"	21"	30"	2½ - 3½	⅜"	⅝"	70
CAPTA6030C3	21"	21"	30"	3½ - 5	⅜"	⅝"	66
CAPTA6030D3	24½"	21"	30"	3½ - 5	⅜"	⅝"	70

Note: For a properly matched system and piston sizing information, refer to Daikin piston kit chart of the corresponding Daikin outdoor unit.

DIMENSIONS

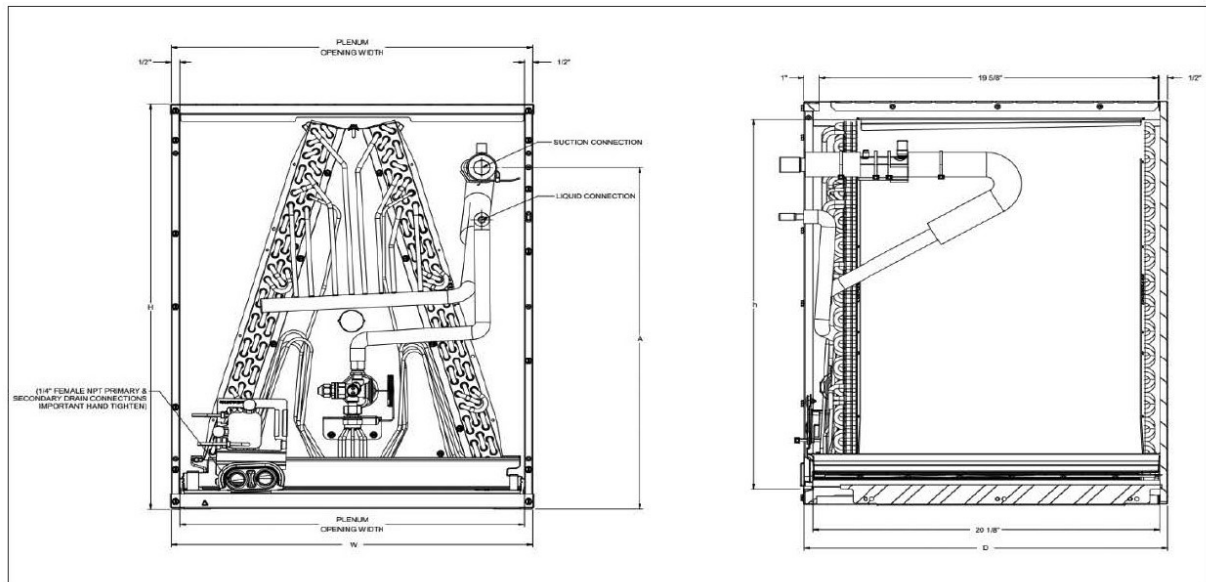



Submittal Data Sheet
1.5T Cased Upflow/Downflow R-32 Coil with TXV
CAPTA1818B3

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
0230K00007	Zoning & Accessory Control Kit for R-32	No
0230K00044	Furnace Integration Kit for R-32 Systems (FIKR32)	No
DPICX-BB	COIL INSULATION KIT	No