



## Submittal Data Sheet

Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 40k BTU/h, Upflow/Horizontal  
DR80SN0403AX

### STANDARD FEATURES

- Heavy-duty stainless-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet single-speed induced draft blower
- Self-diagnostic control board with constant memory fault history output to 3-digit 7 segment LED display and push buttons
- Color-coded low-voltage terminals with provisions for electronic air cleaner and humidifier
- Multi-speed (9-speed tap) ECM blower motor
- Multiple continuous fan speed options offer quiet air circulation
- California Low NOx emissions-compliant models available
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019
- AHRI Certified
- ETL Listed



### CABINET FEATURES

- Designed for multi-position installation: Upflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) = 2%
- Heavy-gauge steel cabinet with durable finish
- Foil faced insulated heat exchanger

### NOTES

- Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the Lifetime Heat Exchanger Limited Warranty (good for as long as you own your home), the 6-Year Unit Replacement Limited Warranty and the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.



Submittal Data Sheet

Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 40k BTU/h, Upflow/Horizontal  
DR80SN0403AX

PERFORMANCE

|                                         |              |                                    |                                                                                  |
|-----------------------------------------|--------------|------------------------------------|----------------------------------------------------------------------------------|
| Product Model No.                       | DR80SN0403AX | Product Model Name:                | Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 40k BTU/h, Upflow/Horizontal |
| AFUE % Rating:                          | 80%          | Rated Heating Capacity (Btu/hr):   |                                                                                  |
| Temperature Rise Range (°F) (Low/High): | /            | Furnace Input Capacity (Btu/hr):   | 40,000                                                                           |
| Rated External Static Pressure - inWG:  |              | Furnace Output Capacity (Btu/hr):  | 32,000                                                                           |
| Blower Speed (RPM):                     |              | Blower Motor Rating (HP):          | 1/2                                                                              |
| Blower Input Power (kW):                |              | Blower Available AC Tonnage (L/H): | /                                                                                |

PRODUCT DETAILS

|                                       |                  |                               |                   |
|---------------------------------------|------------------|-------------------------------|-------------------|
| Power Supply (V/Hz/Ph):               | 115 / 60 / 1     | Airflow Rate (High) (CFM):    | 697               |
| Min. Circuit Amps MCA (A):            | 8.7              | Motor Type:                   | Multi-Speed       |
| Max Overcurrent Protection (MOP) (A): | 15               | Gas Valve Type:               | Single Stage      |
| Dimensions (HxWxD) (in):              | 33-3/8 x 14 x 28 | Installation Configuration:   | Upflow/Horizontal |
| Number of Burners:                    |                  | Blower Size Diameter (inch):  | 10                |
| Heating Vent Diameter in. (Min/Max):  | /                | Blower Size Width (inch):     | 6                 |
| Net Weight (lb):                      | 86               | Condensate Connection (inch): |                   |
| Gross Weight (lb):                    | 95               | Sound Pressure () (dBA):      |                   |




Submittal Data Sheet

Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 40k BTU/h, Upflow/Horizontal  
DR80SN0403AX

DIMENSIONAL DRAWING

DR80SN DIMENSIONS

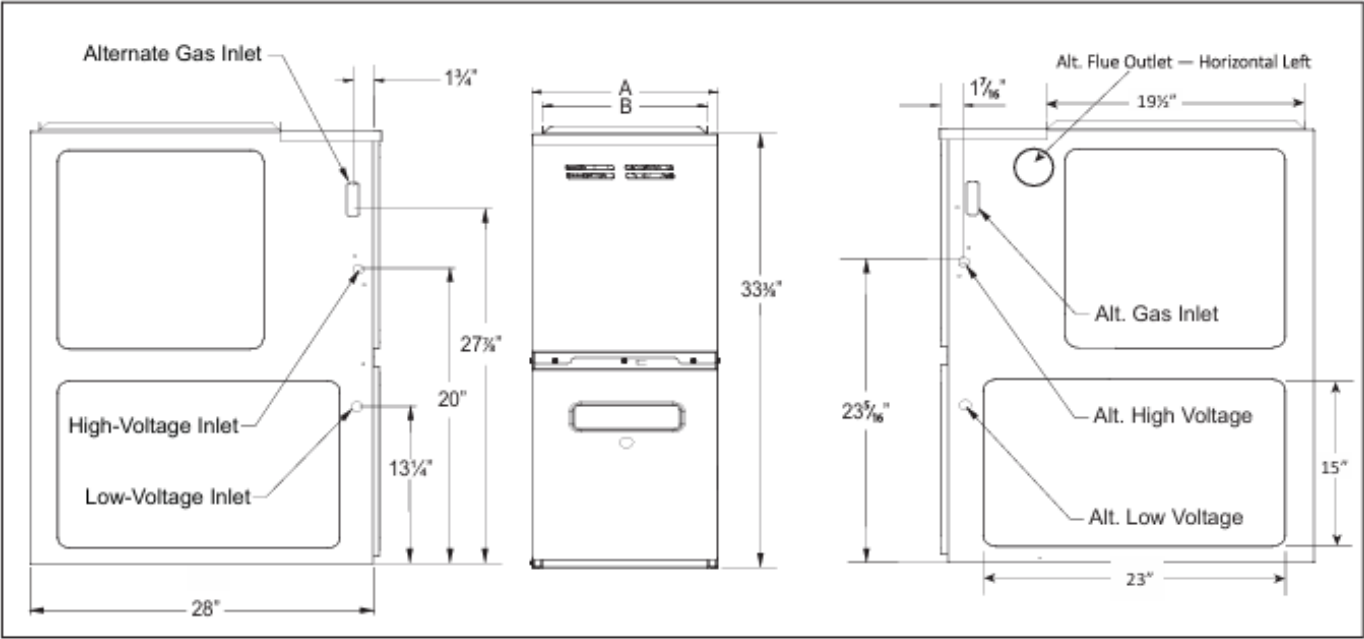

| MODEL         | A       | B       |
|---------------|---------|---------|
| DR80SN0403A*A | 14"     | 12 1/2" |
| DR80SN0603A*A | 14"     | 12 1/2" |
| DR80SN0604B*A | 17 1/2" | 16"     |
| DR80SN0804B*A | 17 1/2" | 16"     |

| MODEL         | A       | B       |
|---------------|---------|---------|
| DR80SN0805C*A | 21"     | 19 1/2" |
| DR80SN1005C*A | 21"     | 19 1/2" |
| DR80SN1205D*A | 24 1/2" | 23"     |