



Submittal Data Sheet

Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, Ultra Low NOx, 80k BTU/h, Upflow/Horizontal
DR80SN0804BU

STANDARD FEATURES

- Heavy-duty stainless-steel dual-diameter tubular heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quietn multi-speed induced draft blower
- Self-diagnostic control board with constant memory fault history output to 3-digit 7 segment LED displaynd push buttons
- Color-coded low-voltage terminals with provisions for electronicir cleanernd humidifier
- Multi-speed 9-Speed ECM blower motor
- Multiple continuous fan speed options offer quietir circulation
- All Ultra-Low NOx DR96SN-U models comply with the 14 ng/J emission limit specified in the South Coastir Quality Management District (SCAQMD) Rule 1111nd San Joaquin Valleyir Pollution Control District (SJVAPCD) Rule 4905. Learn more at www.aqmd.govnd www.valleyair.org.
- AHRI Certified
- ETL Listed

CABINET FEATURES

- Designed for multi-position installation: Upflow, horizontal left or right
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gasnd electrical service
- Cabinetir leakage (QLeak) = 2%
- Heavy-gauge steel cabinet with durable finish
- Foil faced insulated heat exchanger





Submittal Data Sheet

Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, Ultra Low NOx, 80k BTU/h, Upflow/Horizontal
DR80SN0804BU

PERFORMANCE

Product Model No.	DR80SN0804BU	Product Model Name:	Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, Ultra Low NOx, 80k BTU/h, Upflow/Horizontal
AFUE % Rating:	80%	Rated Heating Capacity (Btu/hr):	
Temperature Rise Range (°F) (Low/High):	/	Furnace Input Capacity (Btu/hr):	80,000
Rated External Static Pressure - inWG:		Furnace Output Capacity (Btu/hr):	64,000
Blower Speed (RPM):		Blower Motor Rating (HP):	0.75
Blower Input Power (kW):		Blower Available AC Tonnage (L/H):	/

PRODUCT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (High) (CFM):	1,223
Min. Circuit Amps MCA (A):	12.7	Motor Type:	Multi-Speed
Max Overcurrent Protection (MOP) (A):	20	Gas Valve Type:	Single Stage
Dimensions (HxWxD) (in):	33-3/8 x 17-1/2 x 28	Installation Configuration:	Upflow/Horizontal
Number of Burners:		Blower Size Diameter (inch):	10
Heating Vent Diameter in. (Min/Max):	/	Blower Size Width (inch):	8
Net Weight (lb):	108	Condensate Connection (inch):	0
Gross Weight (lb):	114	Sound Pressure () (dBA):	




Submittal Data Sheet

Single Stage, 9-Speed ECM Gas Furnace up to 80%FUE, Ultra Low NOx, 80k BTU/h, Upflow/Horizontal
DR80SN0804BU

DIMENSIONAL DRAWING

DIMENSIONS

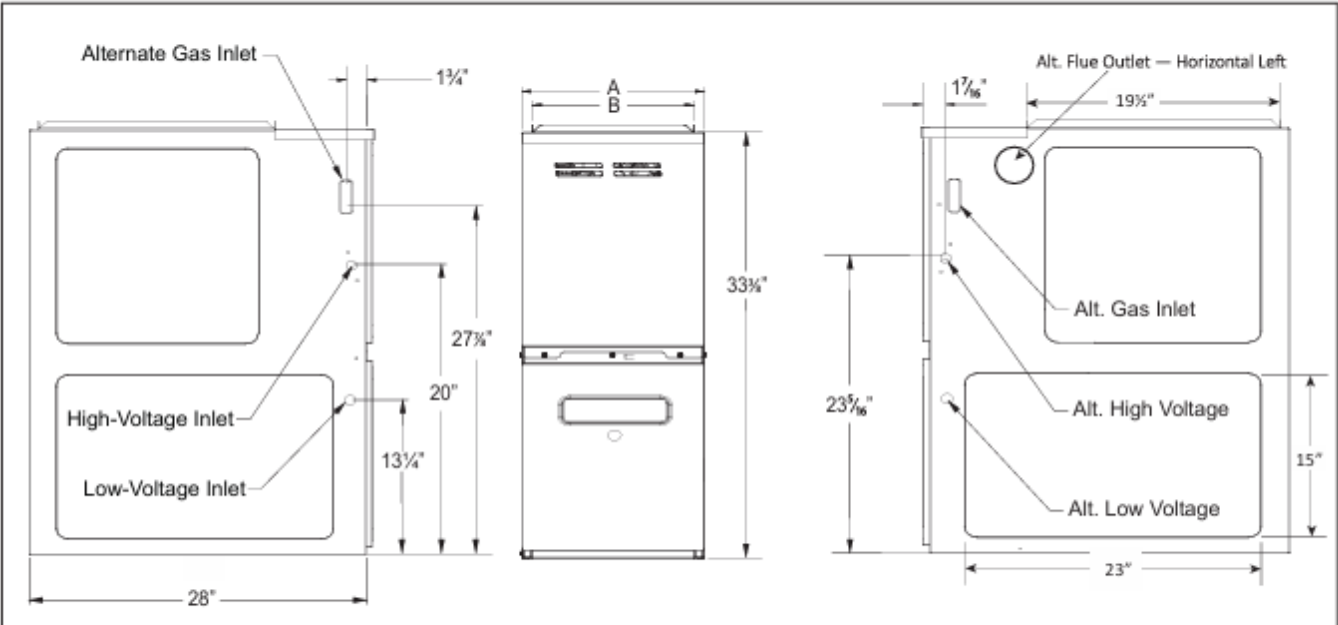

MODEL	A	B
DR80SN0403AU*	14"	12 1/2"
DR80SN0603AU*	14"	12 1/2"
DR80SN0604BU*	17 1/2"	16"
DR80SN0804BU*	17 1/2"	16"
DR80SN0805CU*	21"	19 1/2"