



Submittal Data Sheet

Two-Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 120k BTU/h, Upflow/Horizontal
DR80TN1205DX

STANDARD FEATURES

- Heavy-duty stainless-steel dual-diameter, tubular heat exchanger
- Two-stage gas valve provides quiet, economical heating
- Durable Silicon Nitride igniter
- Quiet two-speed draft inducer
- Self-diagnostic control board with constant memory fault history output to 3-digit 7 segment LED display and push buttons
- Multi-speed (9-speed tap) ECM blower motor
- Multiple continuous fan speed options offer quiet air circulation
- California Low NOx emissions-compliant models available
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019
- AHRI Certified
- ETL Listed

CABINET FEATURES

- Designed for multi-position installation: Upflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) = 2%
- Heavy-gauge steel cabinet with durable finish
- Foil faced insulated heat exchanger



NOTES

- Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the Lifetime Heat Exchanger Limited Warranty (good for as long as you own your home), the 6-Year Unit Replacement Limited Warranty and the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.



Submittal Data Sheet

Two-Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 120k BTU/h, Upflow/Horizontal
DR80TN1205DX

PERFORMANCE

Product Model No.	DR80TN1205DX	Product Model Name:	Two-Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 120k BTU/h, Upflow/Horizontal
AFUE % Rating:	80%	Rated Heating Capacity (Btu/hr):	
Temperature Rise Range (°F) (Low/High):	/	Furnace Input Capacity (Btu/hr):	120,000
Rated External Static Pressure - inWG:		Furnace Output Capacity (Btu/hr):	96,000
Blower Speed (RPM):		Blower Motor Rating (HP):	1
Blower Input Power (kW):		Blower Available AC Tonnage (L/H):	/

PRODUCT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (High / Low) (CFM):	1,729 / 1,249
Min. Circuit Amps MCA (A):	15.32	Motor Type:	Multi-Speed
Max Overcurrent Protection (MOP) (A):	20	Gas Valve Type:	Two Stage
Dimensions (HxWxD) (in):	33-3/8 x 24-1/2 x 28	Installation Configuration:	Upflow/Horizontal
Number of Burners:		Blower Size Diameter (inch):	11
Heating Vent Diameter in. (Min/Max):	/	Blower Size Width (inch):	10
Net Weight (lb):	124	Condensate Connection (inch):	
Gross Weight (lb):	143	Sound Pressure () (dBA):	




Submittal Data Sheet

Two-Stage, 9-Speed ECM Gas Furnace up to 80%FUE, 120k BTU/h, Upflow/Horizontal
DR80TN1205DX

DIMENSIONAL DRAWING

DR80TN DIMENSIONS

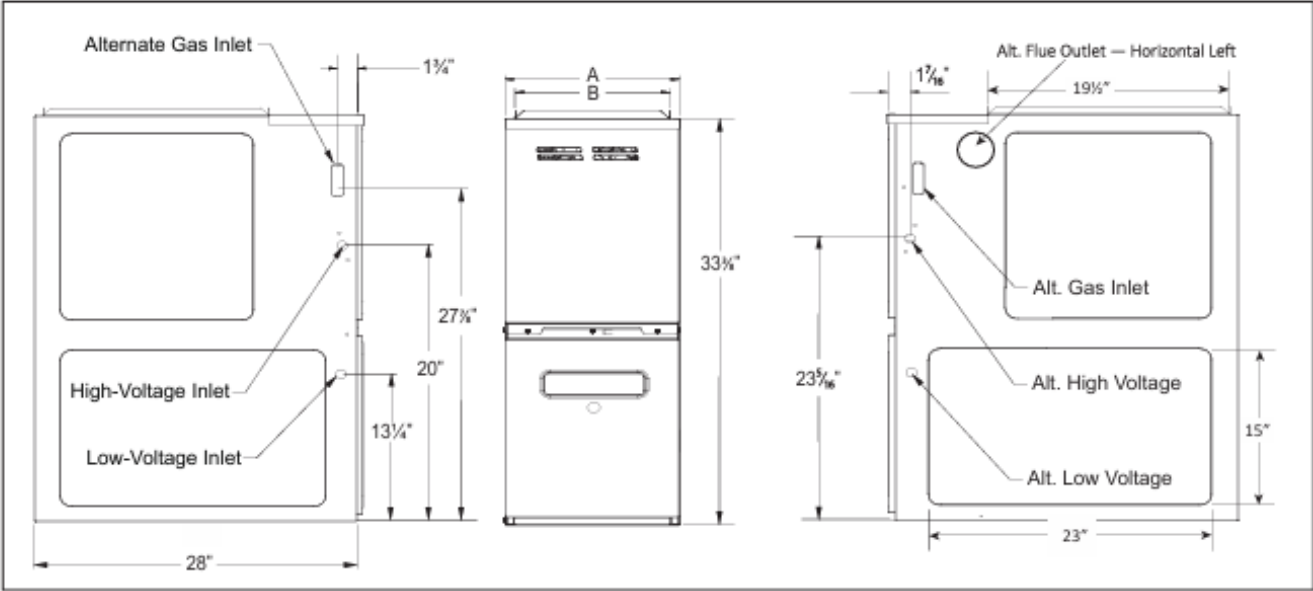

MODEL	DIMENSIONS				
	A	B	W	D	H
DR80TN0403A*	14"	12 1/2"	14	28	33 1/4"
DR80TN0603B*	17 1/2"	16"	17 1/2"	28	33 1/4"
DR80TN0803B*	17 1/2"	16"	17 1/2"	28	33 1/4"
DR80TN0805C*	21"	19 1/2"	21	28	33 1/4"
DR80TN1005C*	21"	19 1/2"	24 1/2"	28	33 1/4"
DR80TN1205D*	24 1/2"	23"	21	28	33 1/4"